

INNOVATE
DESIGN
ELEVATE
BRANDS
以创新设计赋能品牌升级

YOUGU

无主灯
全球高端定制服务商
OEM/ODM
以匠心致好光

LIGHTING PRODUCTS
WORLDWIDE PREMIUM
CUSTOM SERVICE




ZHONGSHAN YOUGU LIGHTING TECHNOLOGY CO., LTD.
中山优固照明科技有限公司

Address: No. 6, Right Third Lane, Lelin Street, Tongyi Industrial Park, Guzhen Town,
Zhongshan City, Guangdong Province
地址: 广东省中山市古镇镇同益工业园乐临街右三巷6号

2026.VOL2

CRAFTED FOR PREMIUM LIGHT

以匠心致好光



PRODUCT
CATALOG
2026.VOL2

Lucella Beauty

THE HOME OF LIGHT

让 灯 光 回 归 自 然



无主灯
全球高端定制服务商
OEM/ODM

LIGHTING PRODUCTS
WORLDWIDE PREMIUM
CUSTOM SERVICE

以匠心 致好光

**CRAFTED FOR
PREMIUM LIGHT**
以 匠 心 致 好 光

As time flows, light defines the order.
时光轮转，光影为序

Proper lighting guards your biological rhythm and mood,
just as nature's day-night cycle does.

合理的照明，如同自然的昼夜节律，
守护着我们的生理节奏与情绪状态。





COMPANY PROFILE

企业简介

中山优固照明科技有限公司成立于2016年，专注于家居照明、商业照明等领域的筒射灯产品研发、生产与定制服务。

优固照明拥有一支由业内资深专家和优秀工程师组成的研发团队，一直以「懂你的那一束光」为品牌初心，核心主营OEM/ODM贴牌定制，具备自主模具设计、产品开发、整体方案输出能力。以创新的产品设计为行业伙伴打造高差异化、高竞争力的照明产品，赋能品牌升级。

在生产方面，引进了国际先进的生产设备和工艺流程，依托先进生产设备与标准化工艺流程，全链路严控品质，确保每一件产品都达到高品质标准。

凭借过硬智造实力与定制服务优势，营销网络遍布全国，业务远销海内外，长期为品牌商、工程渠道、经销商提供稳定可靠的代工合作与产品设计配套服务，收获市场广泛认可。

未来，优固照明将继续秉承“创新、品质、服务”的企业理念，持续升级定制研发与智造能力，致力于成为全球领先的LED照明产品高端定制服务商，不断推出更多创新产品，满足客户不断升级的需求，为人类创造更加美好的照明环境。



无主灯
全球高端定制服务商
OEM/ODM 以匠心 致好光

LIGHTING PRODUCTS
WORLDWIDE PREMIUM
CUSTOM SERVICE



One-stop Lighting Solutions
Design-driven Brand Empowerment

YOUGU

ZHONGSHAN YOUGU LIGHTING TECHNOLOGY CO., LTD. was established in 2016, specializing in the research, development, production, and customization services of downlight products in the fields of home lighting and commercial lighting.

YOUGU Lighting boasts a research and development team comprised of industry veterans and outstanding engineers. Adhering to the brand mission of "Understanding Your Light", the company specializes in OEM/ODM customization, possessing capabilities in independent mold design, product development, and comprehensive solution delivery. Through innovative product design, YOUGU Lighting collaborates with industry partners to craft highly differentiated and competitive lighting products, thereby empowering brand upgrades.

In terms of production, we have introduced internationally advanced production equipment and process flows. Relying on these advanced production equipment and standardized process flows, we strictly control quality throughout the entire process, ensuring that every product meets high-quality standards.

Leveraging our robust manufacturing capabilities and strengths in customized services, our marketing network spans the entire country, with our products being exported both domestically and internationally. We have long provided stable and reliable OEM cooperation and product design support services to brand owners, engineering channels, and distributors, earning widespread recognition in the market.

In the future, YOUGU Lighting will continue to uphold the corporate philosophy of "Innovation, Quality, Service", continuously upgrade its customized research and development and intelligent manufacturing capabilities, and strive to become a globally leading high-end customized service provider for LED lighting products. We will continuously launch more innovative products to meet customers' ever-evolving needs and create a more beautiful lighting environment for humanity.




RESEARCH AND DEVELOPMENT

产品设计研发

One-stop Lighting Solutions
Design-driven Brand Empowerment

一站式照明定制解决方案
以创新设计赋能品牌升级

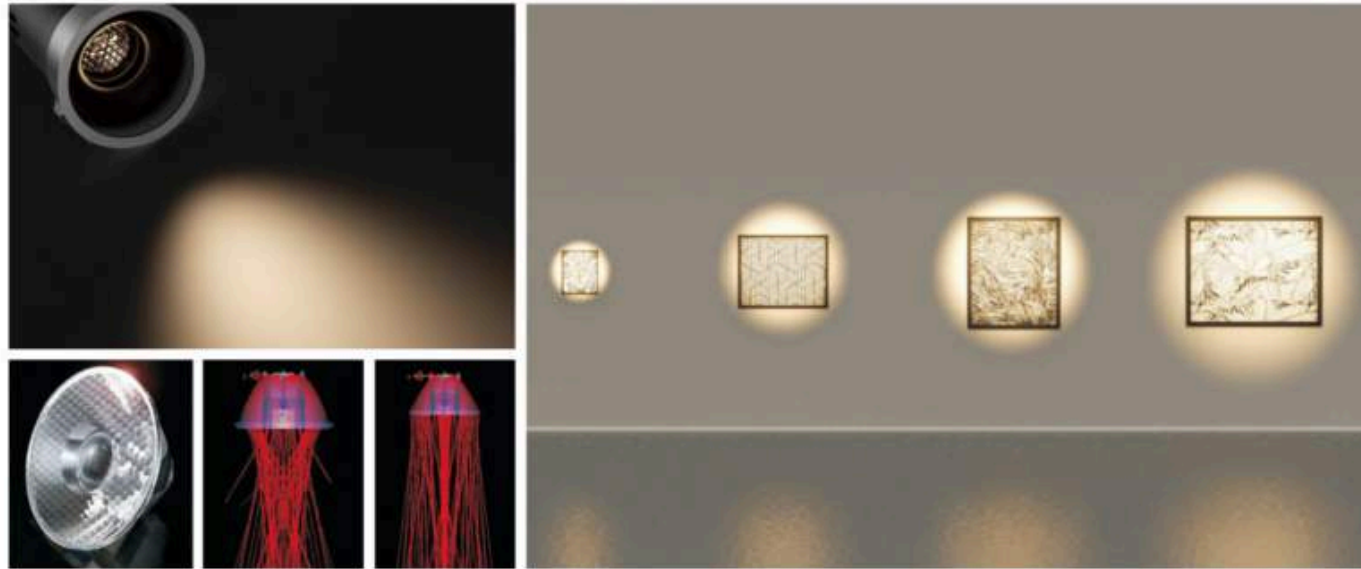

专注于家居照明、商业照明等领域的筒射灯产品研发、生产与定制服务。
具备自主模具设计、产品开发、整体方案输出能力。
以创新的产品设计为你打造高差异化、高竞争力的照明产品，赋能品牌升级。

We specialize in the research, development, production, and customization services of downlight products in the fields of home lighting, commercial lighting, and more. Possess the capability of independent mold design, product development, and overall solution output.

We will create highly differentiated and competitive lighting products for you with innovative product design, empowering your brand to upgrade.



无主灯
全球高端定制服务商
OEM/ODM
LIGHTING PRODUCTS
WORLDWIDE PREMIUM
CUSTOM SERVICE
以匠心 致好光

PRODUCT APPLICATION

产品应用

HOTEL
酒店

CLUBHOUSE
会所



COMMERCIAL SPACE
商业空间

RESTAURANT
餐饮

HOME VILLA
家居别墅



HOTEL
LIGHTING


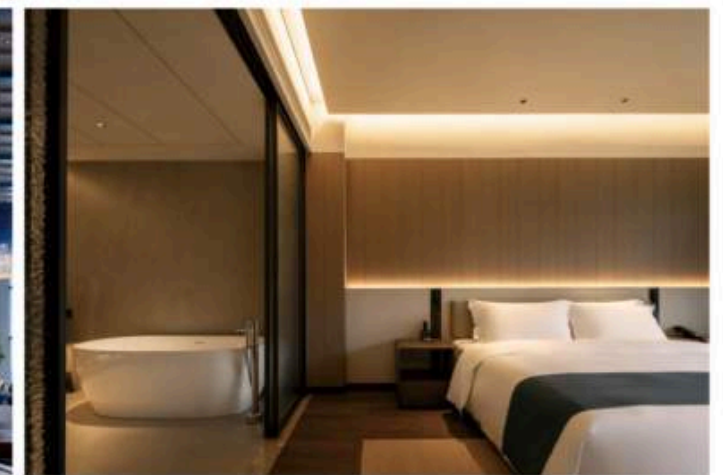
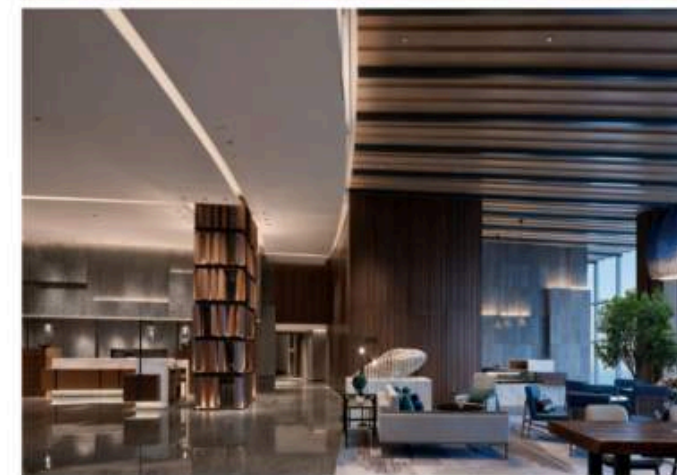


PRODUCT APPLICATION

产品应用



HOTEL 酒店 | CLUBHOUSE 会所 | COMMERCIAL SPACE 商业空间 | RESTAURANT 餐饮 | HOME VILLA 家居别墅

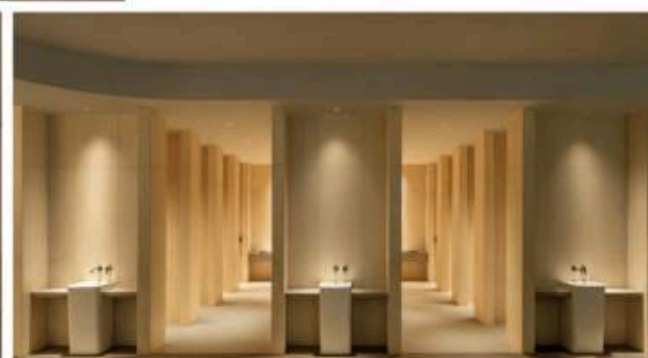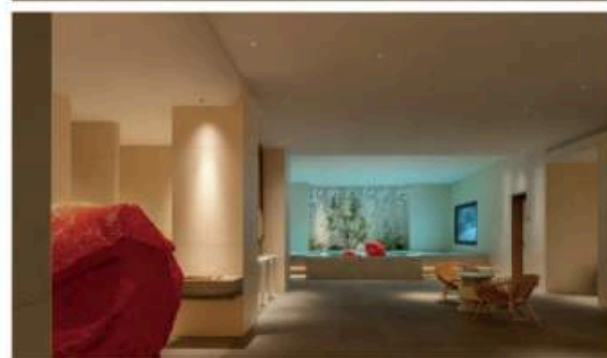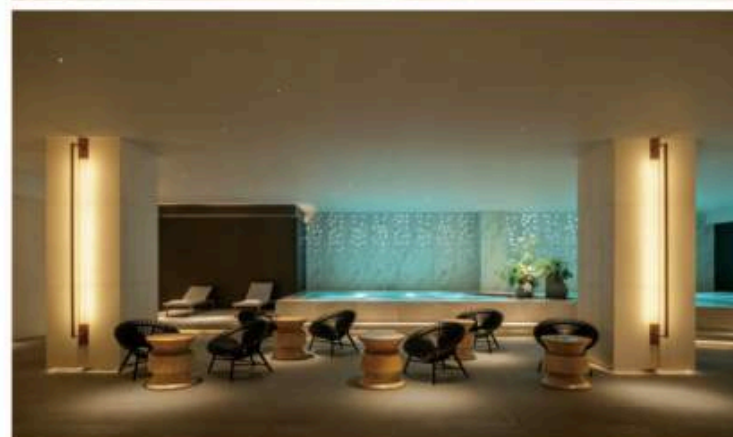



CLUBHOUSE
LIGHTING

YOUNGU

PRODUCT APPLICATION

产品应用

HOTEL 酒店 | CLUBHOUSE 会所 | COMMERCIAL SPACE 商业空间 | RESTAURANT 餐饮 | HOME VILLA 家居别墅

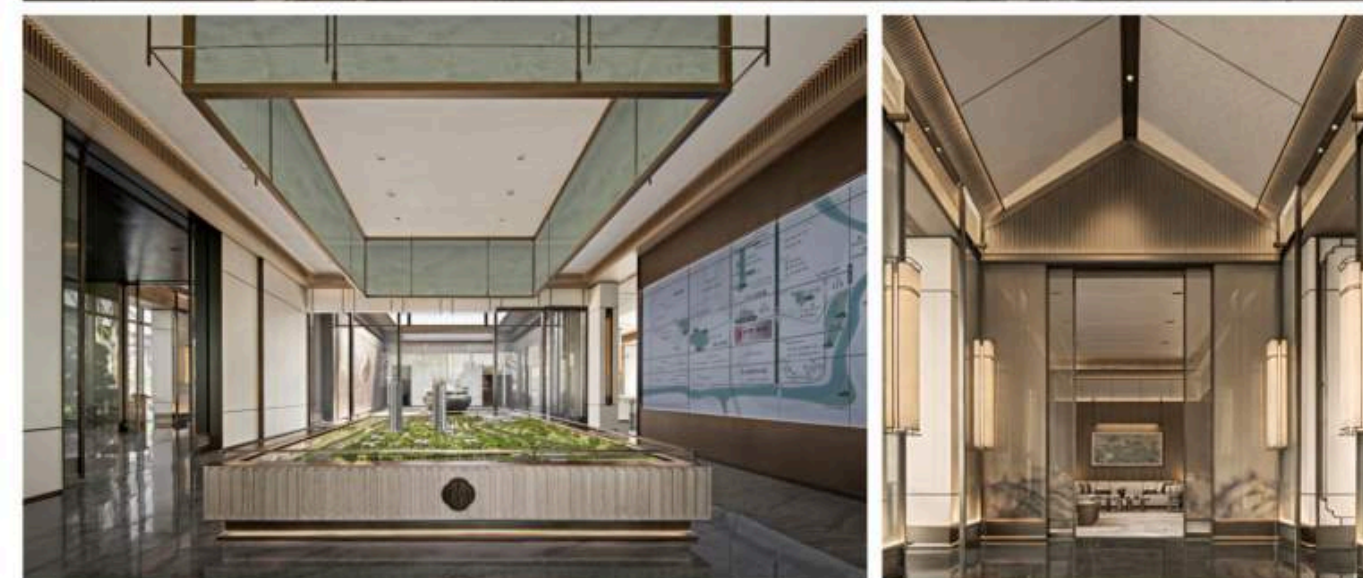
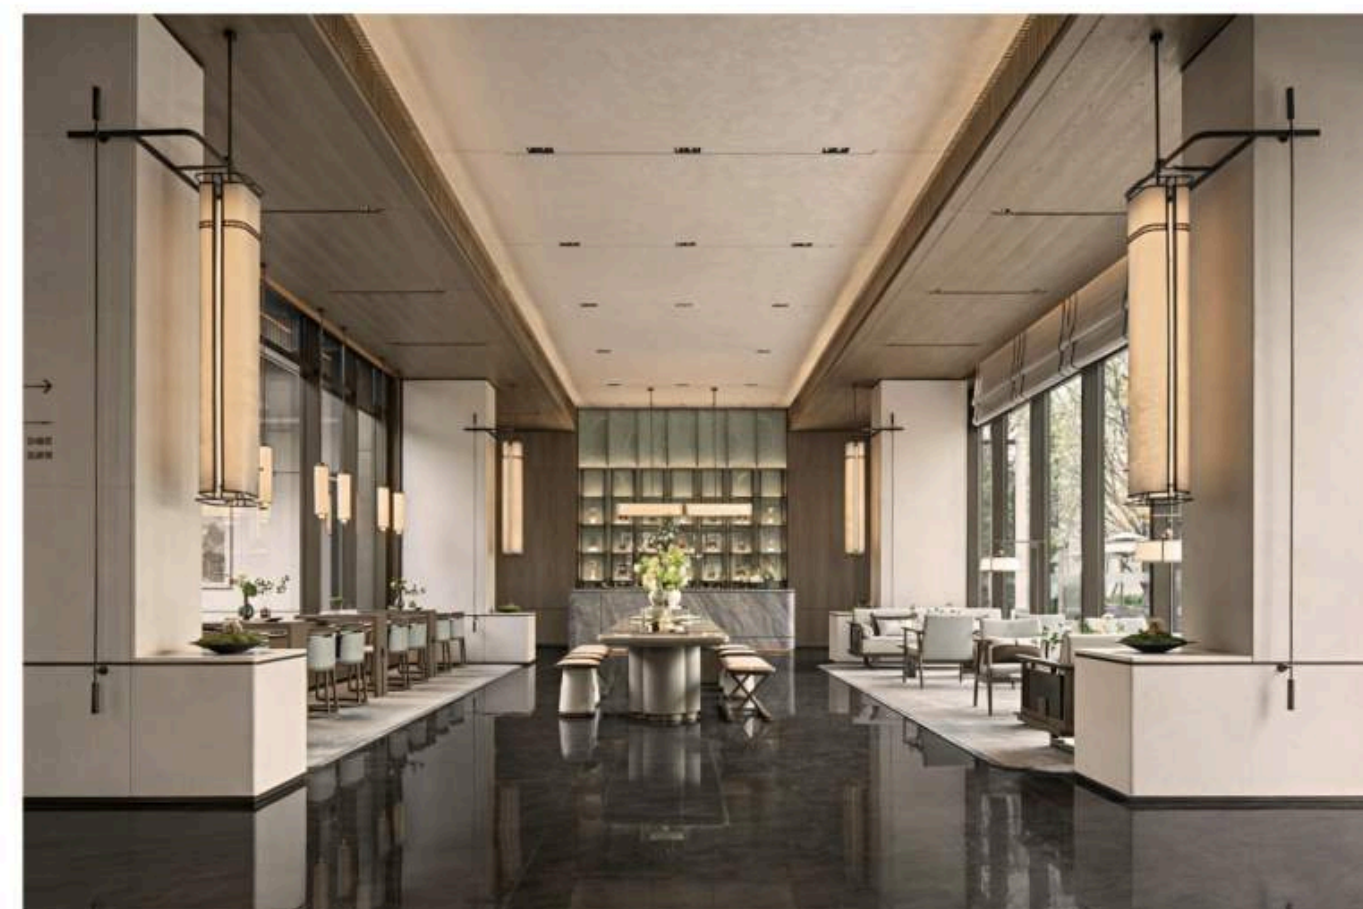


PRODUCT APPLICATION

产品应用



HOTEL 酒店 | CLUBHOUSE 会所 | COMMERCIAL SPACE 商业空间 | RESTAURANT 餐饮 | HOME VILLA 家居别墅

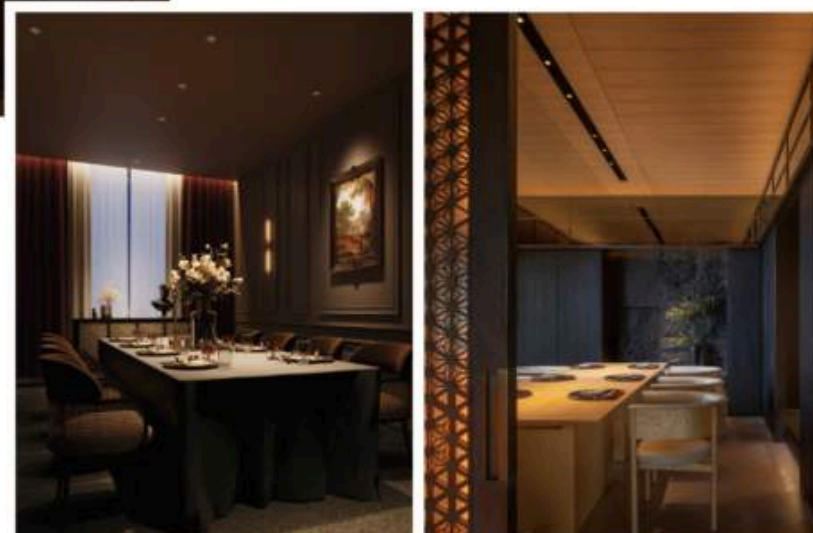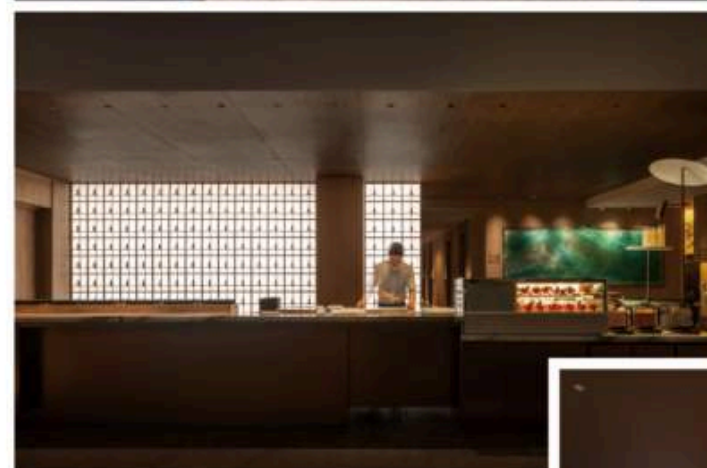

CATERING
LIGHTING

YOUNGU

PRODUCT APPLICATION


产品应用

HOTEL 酒店 | CLUBHOUSE 会所 | COMMERCIAL SPACE 商业空间 | RESTAURANT 餐饮 | HOME VILLA 家居别墅



HOME
VILLA
LIGHTING

INDEX

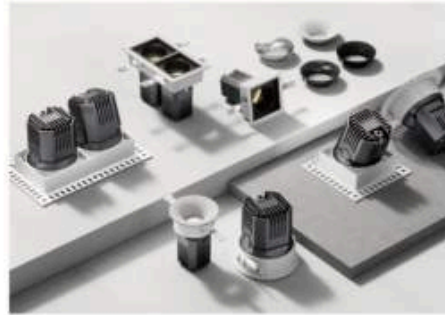

9-21
LIGHT MASTER SERIES
控光大师



22-26
ANTI-GLARE MASTER SERIES
防眩大师



46-55
P6 SERIES



56-61
CLOVER SERIES
四叶草系列



62-68
SHADOW 5S SERIES
光影5S系列



32-36
SWAP MASTER SERIES
替换大师



27-31
DUAL REALM MASTER SERIES
双镜大师


Luella Beauty



69-82
SHADOW 6S SERIES
光影6S系列



83-92
STARRY SKY SERIES
星空系列

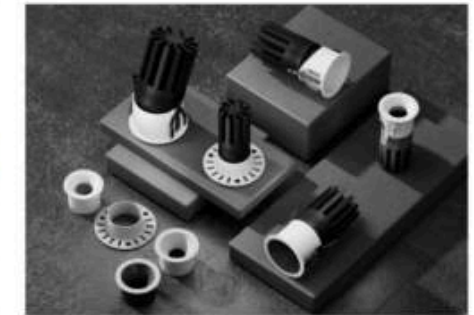

93-98
P7 SERIES



37-45
SHADOW 8S SERIES
光影8S系列



99-103
P5 SERIES



104-109
XUGANG SERIES
旭光系列

INNOVATE
DESIGN
ELEVATE
BRANDS

以创新设计赋能品牌升级



无主灯
全球高端定制服务商
OEM/ODM
LIGHTING PRODUCTS
WORLDWIDE PREMIUM
CUSTOM SERVICE
以匠心 致好礼

LIGHT MASTER

SERIES

控光大师

Structural zoom: 12-36°
结构变焦

LIGHT MASTER SERIES

控光大师

创新结构设计，突破传统调焦射灯局限，支持多档位光束角自由调节。


操作简洁实用，告别复杂调焦结构，精准控光更高效。

单灯即可灵活满足不同照明氛围与用光需求，通用性更强。

Innovative structural design breaks the limitations of traditional focusing spotlights, enabling free adjustment of multi-range beam angles.

Simple and practical operation eliminates cumbersome focusing structures for more efficient precise light control.

A single fixture flexibly meets diverse lighting atmospheres and usage needs with strong universal compatibility.

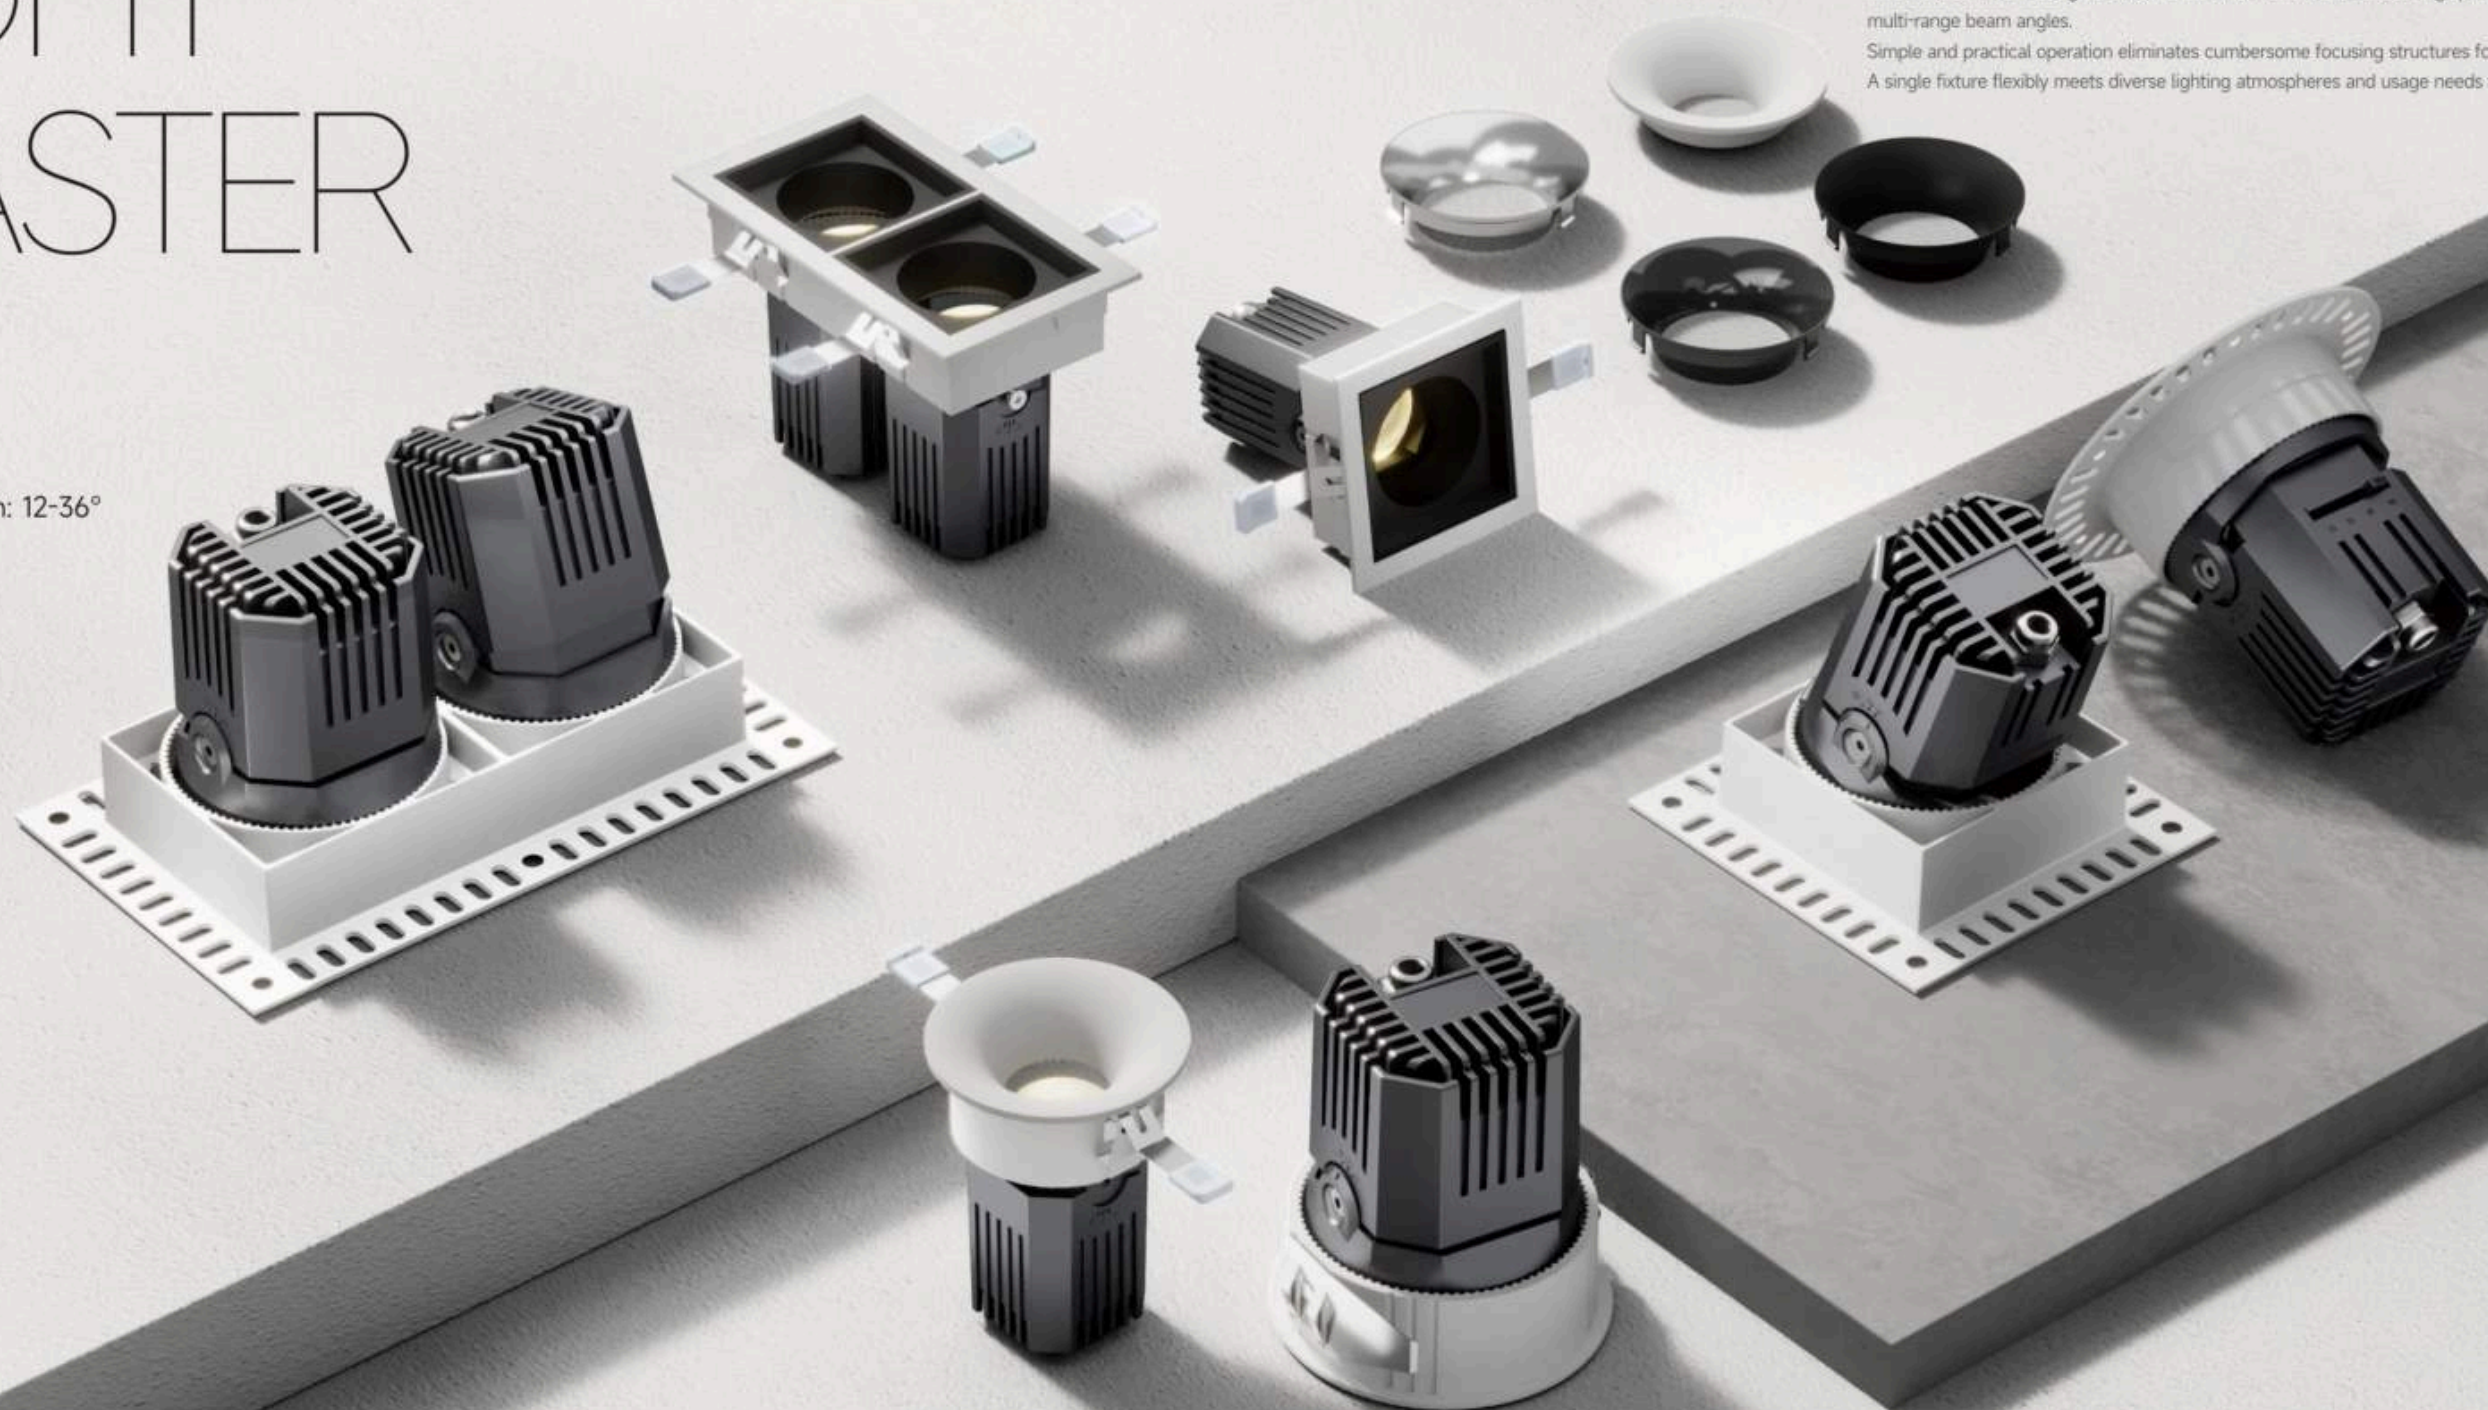




DIRECT EVERY BEAM
WITH
PRECISION

让每一束光都有方向

LIGHT MASTER SERIES
控光大师-调焦款

ADJUSTABLE

Structurally adjustable beam angle



► 结构调节光束角

12°~36°光束角自由调节

简化操作、精准控光、一灯多用；
氛围、洗墙、重点补光一灯解决。

Structurally adjustable beam angle

Beam angle freely adjustable from 12° to 36°

Simplified operation, precise light control, multi-functional
in one lamp;

Covers atmosphere lighting, wall washing and key accent
lighting with a single fixture.



12°
UGR <6

15°
UGR <6

24°
UGR <9

36°
UGR <13

3000

INNOVATIVE STRUCTURE

This light supports beam angle adjustment for various lighting scenarios.

一款灯具可实现不同场景下的光束角切换

8°

12°

15°

24°

36°



FREELY ADJUSTABLE
BEAM ANGLE

创新结构调节光束角

12°~36°光束角自由调节



LIGHT MASTER SERIES


控光大师-调焦款

可调节光束角

创新结构调节光束角，一款灯具可以实现12-36°光束角调节，同时满足多种照明场景应用。

Adjustable beam angle


Innovative structure to adjust beam angle, a lamp can achieve 12-36° beam angle adjustment, while meeting various lighting scene applications.



Ø75mm / 12W

圆形嵌入式

圆形无边框



Structural zoom: 12-36°
结构变焦

75×75mm / 12W

方形嵌入式

方形无边框



Structural zoom: 12-36°
结构变焦

148×75mm / 2×12W

双头方形嵌入式

双头方形无边框




Structural zoom: 12-36°
结构变焦

LIGHT MASTER SERIES

控光大师-调焦款

防眩杯颜色选择

Anti-glare cup color options

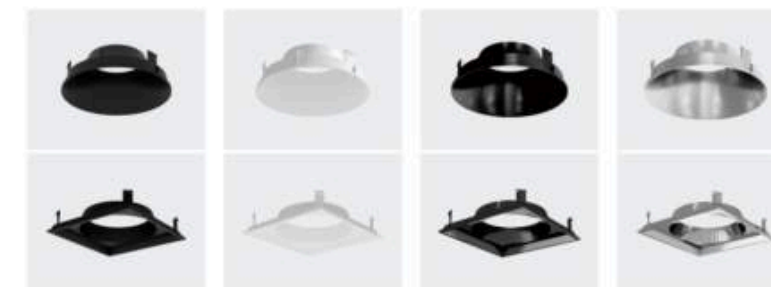


哑黑杯
Matt black

哑白杯
Matt White

枪黑杯
Gun Black

亮银杯
Bright Silver

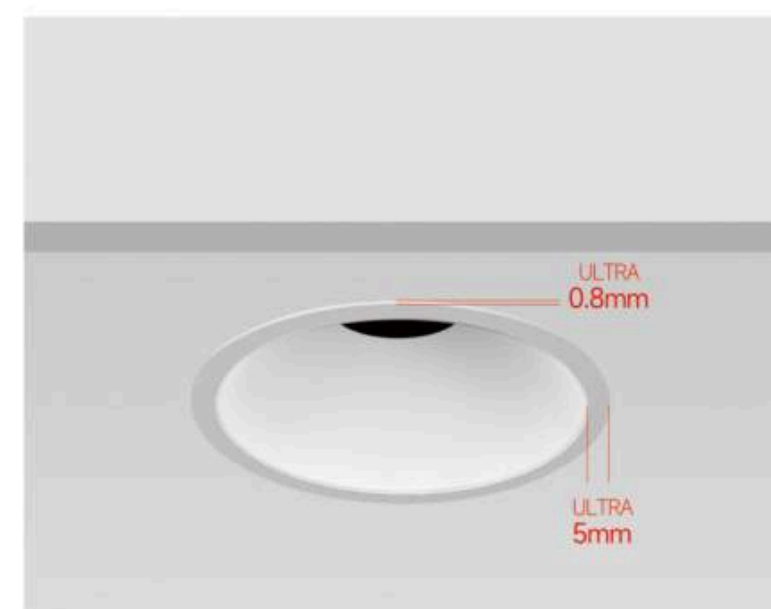


5mm 超窄边框与0.8mm超薄厚度，与天花更贴合
5mm ultra-narrow bezel and 0.8mm ultra-thin design, perfectly fitting the ceiling.

LIGHT MASTER SERIES



Structural zoom: 12-36°
结构变焦



Accessories 配件

Clear	Softening Lens	Honeycomb Louver

※ Compatible with 5S and 6S series face rings.
可以通用5S、6S系列面环

控光大师-调焦款

Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
75圆形嵌入式	12W	COB	≥95	80lm/W	● 3000K ○ 5000K ● 3500K ● 6000K ● 4000K

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installation 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ● ● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm



Photometric 光学角度

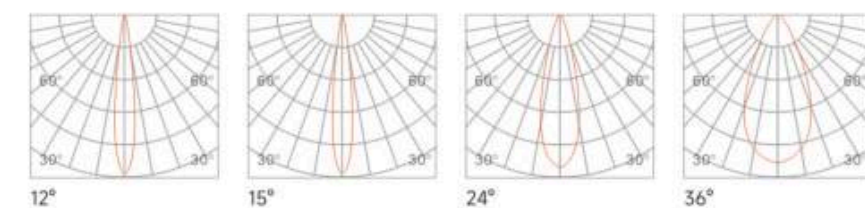


ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE


LIGHT MASTER SERIES



Structural zoom: 12-36°
结构变焦



Accessories 配件



※ Compatible with 5S and 6S series face rings.
可以通用5S、6S系列面环

控光大师-调焦款

Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
75圆形无边框	12W	COB	≥95	80lm/W	● 3000K ○ 5000K ● 3500K ○ 6000K ● 4000K

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installation 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ● ● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm




Photometric 光学角度

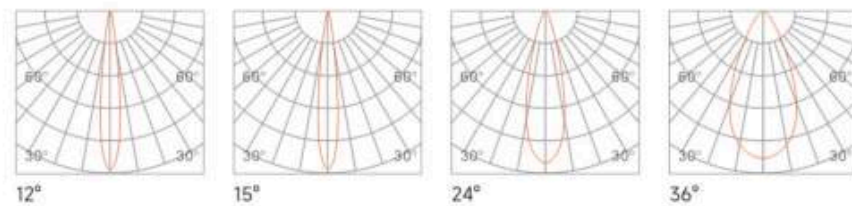


OPTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

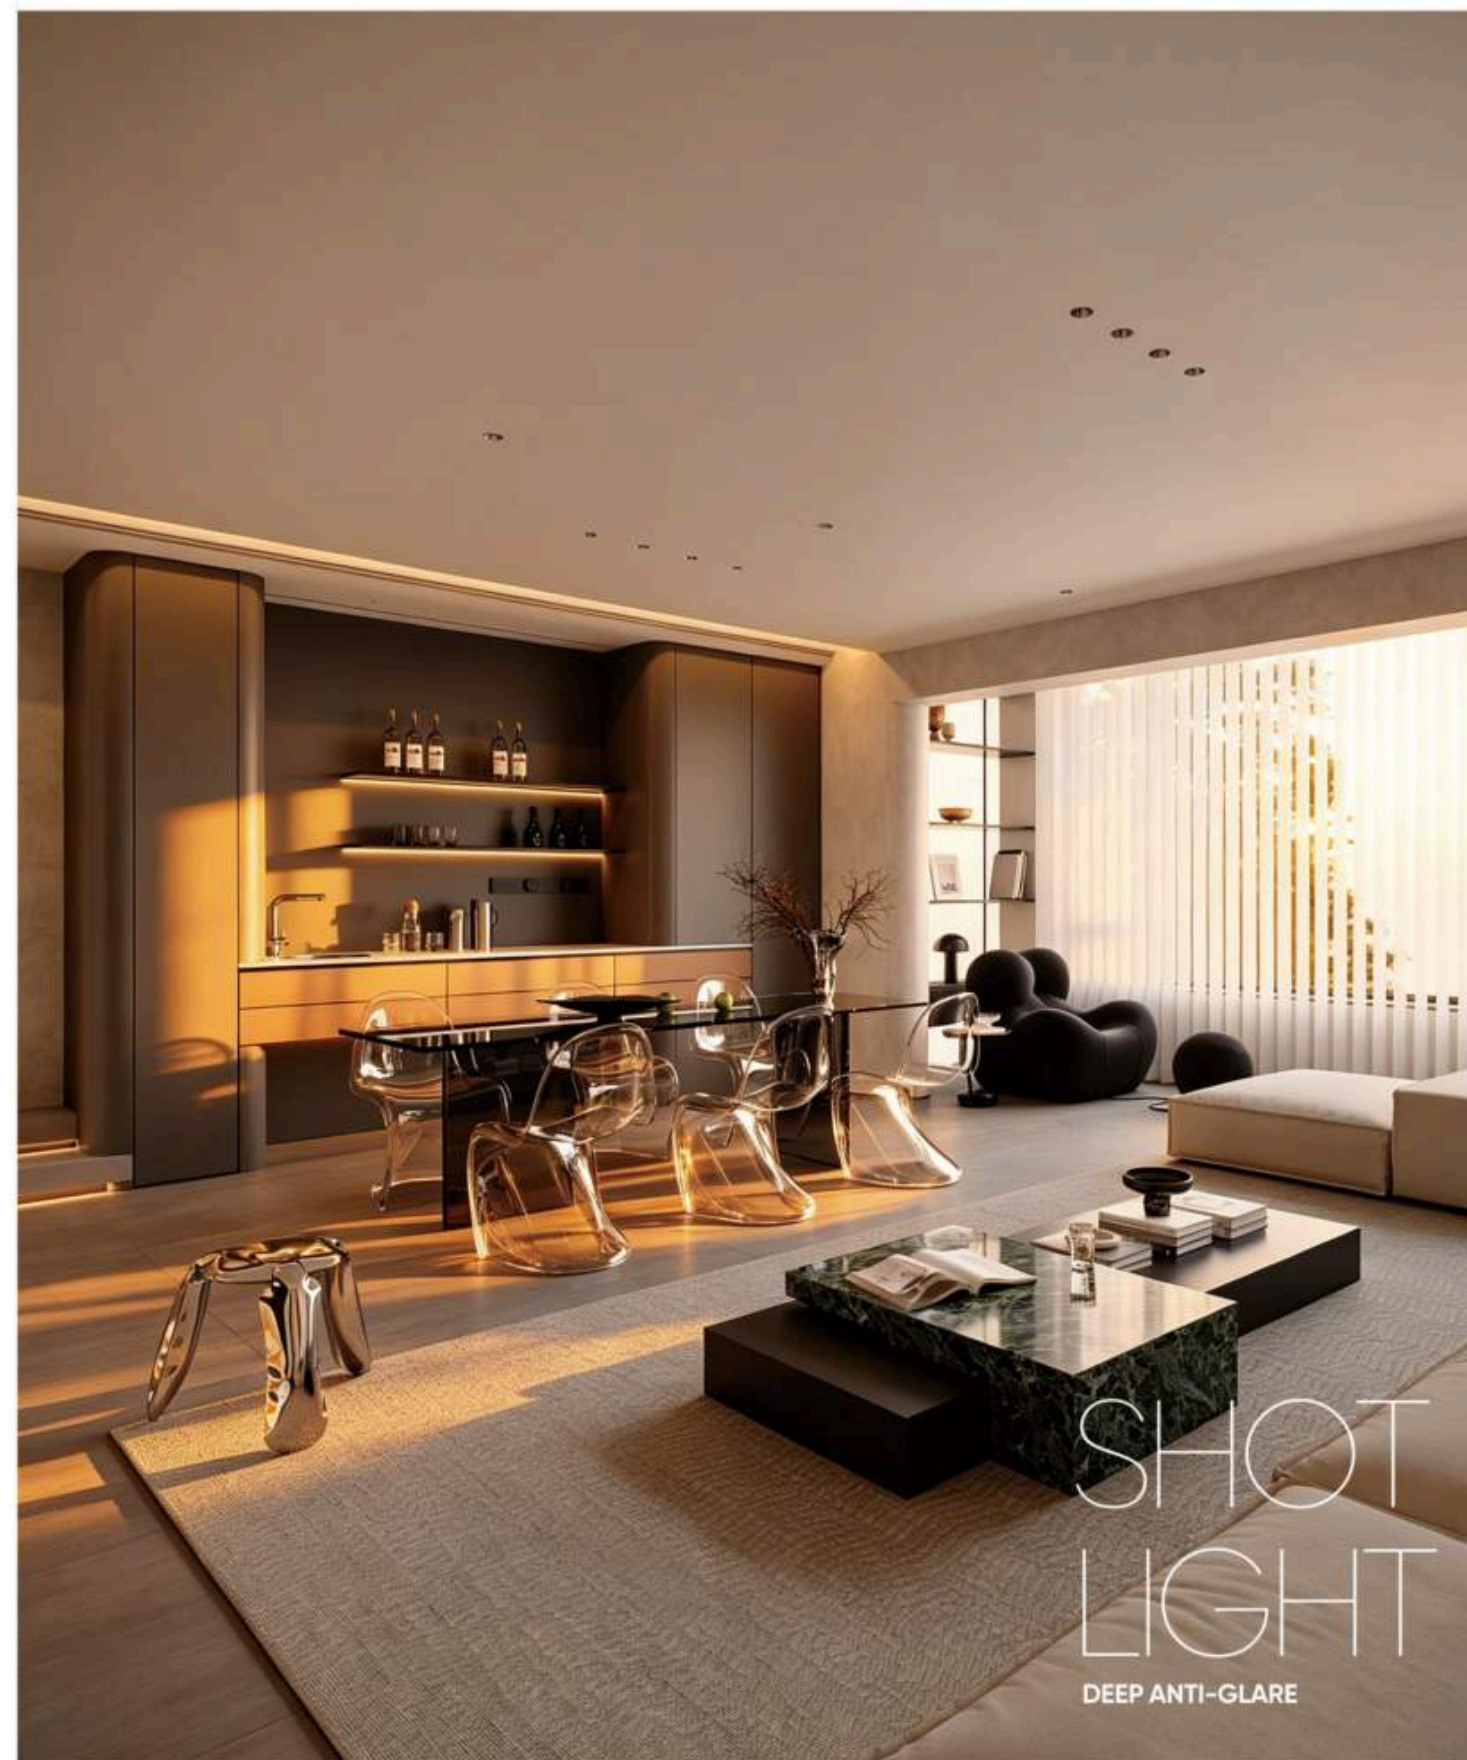


SHOT
LIGHT
DEEP ANTI-GLARE

LIGHT MASTER SERIES



Structural zoom: 12-36°
结构变焦



控光大师-调焦款

Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
75方形嵌入式	12W	COB	≥95	80lm/W	● 3000K ○ 5000K ● 3500K ○ 6000K ○ 4000K

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installation 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ● ● ●

Operating Temp 工作温度
-25°C ~ 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm



Photometric 光学角度

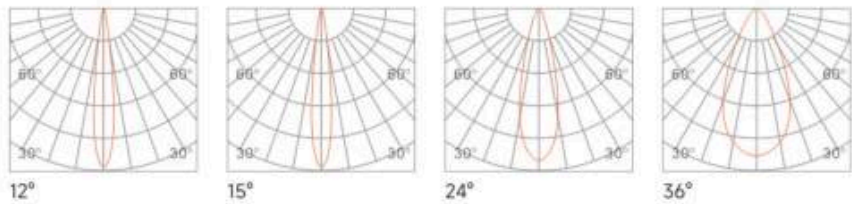

Accessories 配件



※ Compatible with 5S and 6S series face rings.
可以通用5S、6S系列面环


ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

LIGHT MASTER SERIES



Structural zoom: 12-36°
结构变焦



控光大师-调焦款

Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
75方形无边框	12W	COB	≥95	80lm/W	● 3000K ○ 5000K ● 3500K ○ 6000K ○ 4000K

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installation 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ● ● ●

Operating Temp 工作温度
-25°C ~ 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm



Photometric 光学角度

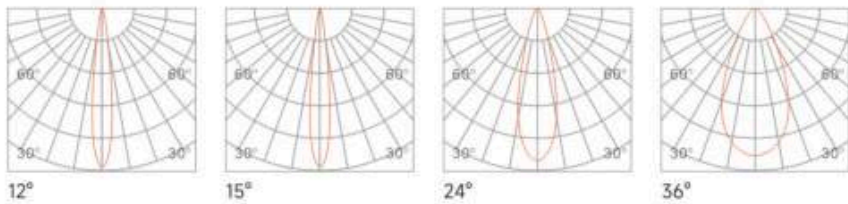

Accessories 配件




※ Compatible with 5S and 6S series face rings.
可以通用5S、6S系列面环


ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

LIGHT MASTER SERIES



Structural zoom: 12-36°
结构变焦



Accessories 配件



※ Compatible with 5S and 6S series face rings.
可以通用5S、6S系列面环

控光大师-调焦款

Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
75双头方形嵌入式	2×12W	COB	≥95	80lm/W	● 3000K ○ 5000K ● 3500K ● 6000K ● 4000K

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installtion 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ● ● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm



Photometric 光学角度

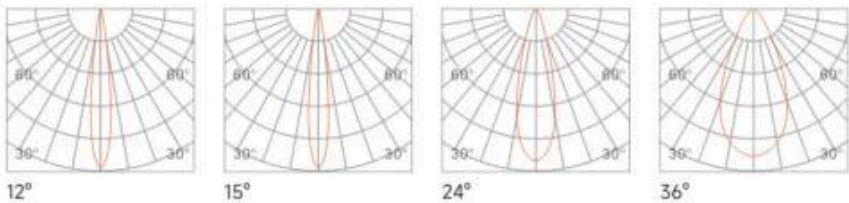


ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

LIGHT MASTER SERIES



Structural zoom: 12-36°
结构变焦



Accessories 配件



※ Compatible with 5S and 6S series face rings.
可以通用5S、6S系列面环

控光大师-调焦款

Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
75双头方形无边框	2×12W	COB	≥95	80lm/W	● 3000K ○ 5000K ● 3500K ● 6000K ● 4000K

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installtion 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ● ● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm



Photometric 光学角度

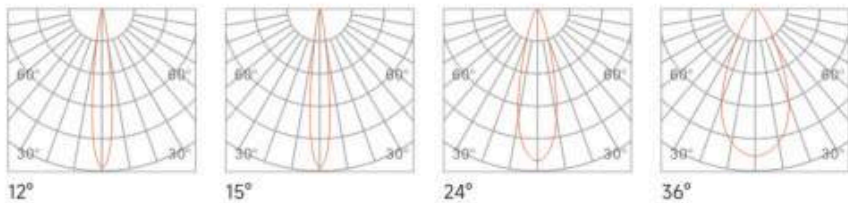

ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

IP65

IP65 防护等级

满足浴室、厨房、雨棚等不同场景需求

IP65 protection grade

Meet the needs of different scenes such as
bathroom, kitchen and canopy.



LIGHT MASTER SERIES

SHOT LIGHT

NOW IP65



LIGHT MASTER SERIES
控光大师-防水款

LIGHT MASTER SERIES

RECESSED SPOTLIGHT

LIGHT MASTER SERIES

控光大师-防水款

IP65结构性防水

采用IP65 结构性防水设计，严密防水防潮，无惧潮湿环境，潮湿空间长期使用更稳定耐用。

IP65 structural waterproof

Adopting IP65 structural waterproof design, it is tightly waterproof and moisture-proof, and is not afraid of humid environments. It is more stable and durable for long-term use in humid spaces.



LIGHT MASTER SERIES

控光大师-防水款

防眩杯颜色选择

Anti-glare cup color options




哑黑杯
Matt black

哑白杯
Matt White

枪黑杯
Gun Black

亮银杯
Bright Silver

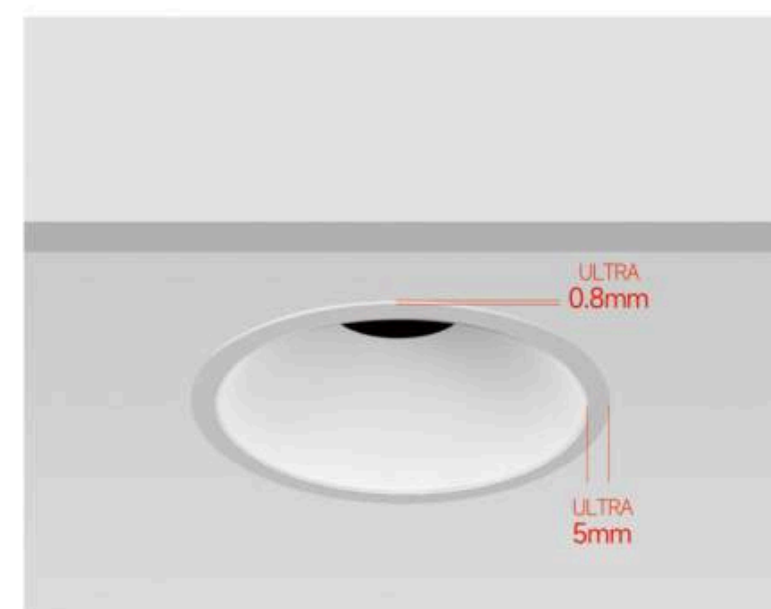

5mm 超窄边框与0.8mm超薄厚度，与天花更贴合
5mm ultra-narrow bezel and 0.8mm ultra-thin design, perfectly fitting the ceiling.

LIGHT MASTER SERIES



ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

Accessories 配件



※ Compatible with 5S and 6S series face rings.
可以通用5S、6S系列面环

控光大师-防水款

Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
55圆形嵌入式	7W	COB	≥95	80lm/W	3000K 5000K
75圆形嵌入式	12W				3500K 6000K
55圆形无边框	7W				4000K
75圆形无边框	12W				

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installtion 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP65


Reflector Colours 防眩杯
● ● ● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm

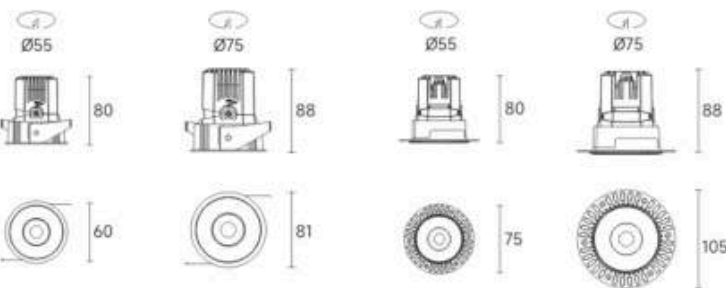

Photometric 光学角度

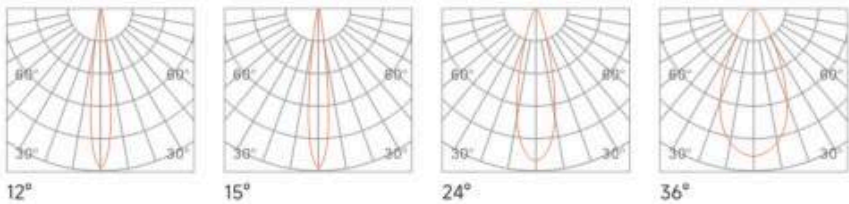

LIGHT MASTER SERIES



ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

Accessories 配件



※ Compatible with 5S and 6S series face rings.
可以通用5S、6S系列面环

控光大师-防水款

Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
55方形嵌入式	7W	COB	≥95	80lm/W	3000K 5000K
75方形嵌入式	12W				3500K 6000K
55方形无边框	7W				4000K
75方形无边框	12W				

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installtion 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP65


Reflector Colours 防眩杯
● ● ● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm

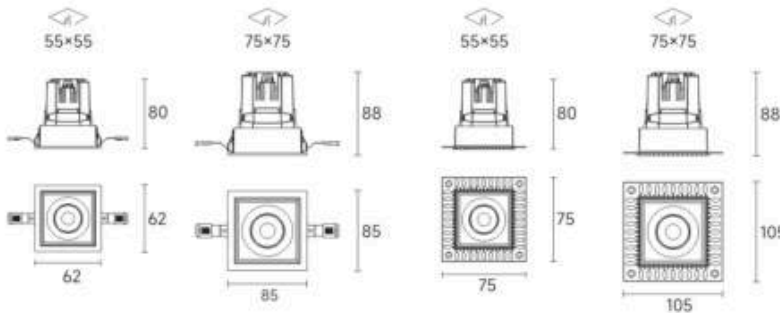

Photometric 光学角度

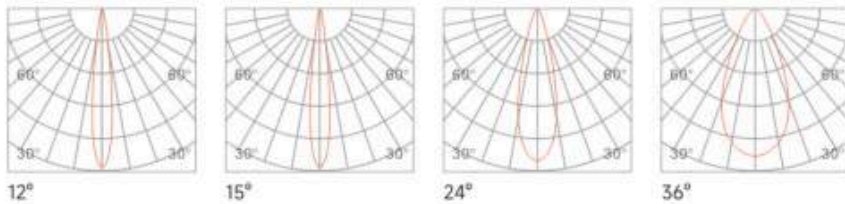

LIGHT MASTER SERIES



ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

Accessories 配件



* Compatible with 5S and 6S series face rings.
可以通用5S、6S系列面环

控光大师-防水款

Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
55双头方形嵌入式	2×7W	COB	≥95	80lm/W	3000K 5000K 3500K 6000K 4000K
75双头方形嵌入式	2×12W				
55双头方形无边框	2×7W				
75双头方形无边框	2×12W				

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installation 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP54


Reflector Colours 防眩杯
● ● ● ●

Operating Temp 工作温度
-25°C ~ 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm

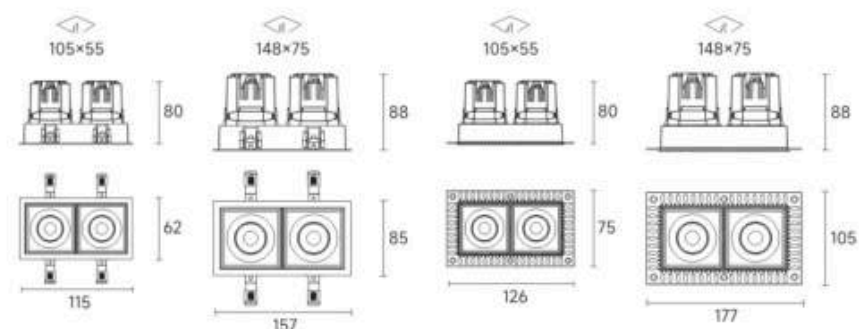

Photometric 光学角度

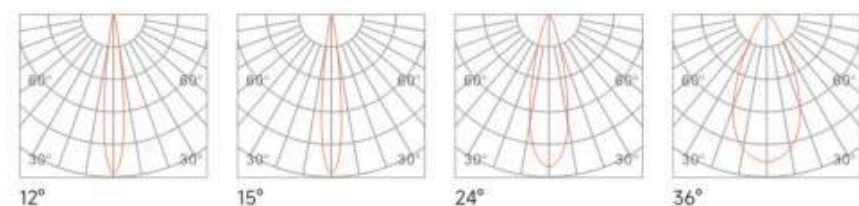

ANTI-GLARE MASTER

SERIES

防眩大师

防眩大师系列灯具光源深藏防眩，突破筒灯防眩性能上限，实现见光不见灯的光影效果。
搭配大尺寸透镜，出光效率出众，光线温润柔和，无刺眼眩光。
产品达 IP54 防水等级，可从容适配各类潮湿场景。
冰川灰细腻质感外观，格调雅致，尽显匠心美学。

Anti-Glare Master Series features recessed light source with superior anti-glare performance, breaking the limit of downlight anti-glare effect and creating invisible lamp visual experience. Equipped with large-size lens, it delivers high luminous efficiency and soft, glare-free lighting. Rated IP54 waterproof, it works steadily in humid environments. Exquisite glacier grey finish presents elegant design and exquisite craftsmanship.

防眩大师
**ULTIMATE
DEEP**
ANTI-GLARE DOWNLIGHT
突破筒灯防眩极限




ANTI-GLARE MASTER SERIES

RECESSED SPOTLIGHT

DOWNLIGHT


DEEP ANTI-GLARE

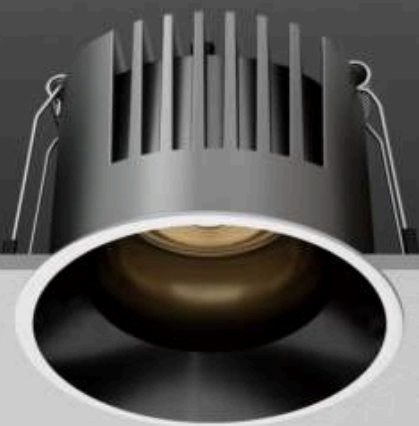

ANTI-GLARE MASTER
防眩大师

BREAK THE ANTI-GLARE LIMIT OF DOWNLIGHT

突破筒灯防眩极限

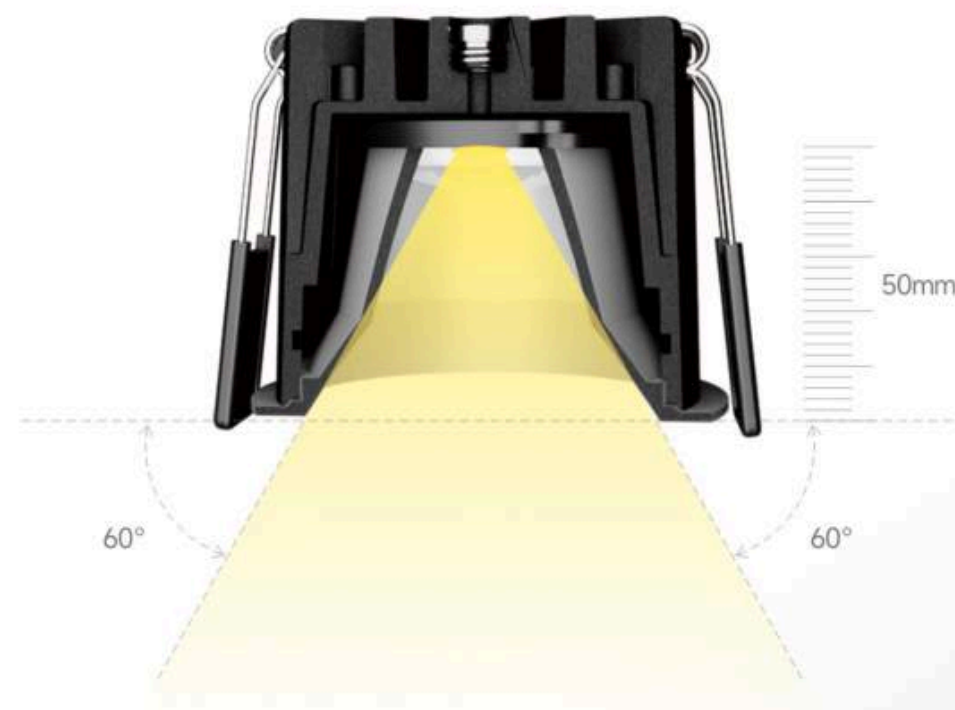

ULTIMATE
DEEP

ULTRA
50mm

光源深藏50mm

DOWNLIGHT

WATERPROOF & ANTI-FOG

IP54



IP54 防护等级
满足浴室、厨房、雨棚等不同场景需求

IP54 protection grade
Meet the needs of different scenes such as
bathroom, kitchen and canopy.

ANTI-GLARE MASTER
防眩大师

ANTI-GLARE DOWNLIGHT



ANTI-GLARE MASTER

防眩大师系列

PC防眩杯款

多种高度尺寸与颜色选择，满足更多的照明设计需求

PC anti-glare cup version

Multiple height sizes and color options meet diverse lighting design demands




不同出光方式面环选择

Optional face rings with different light output designs



5mm 超窄边框，与天花更贴合
5mm ultra-narrow trim

ANTI-GLARE MASTER 防眩大师系列

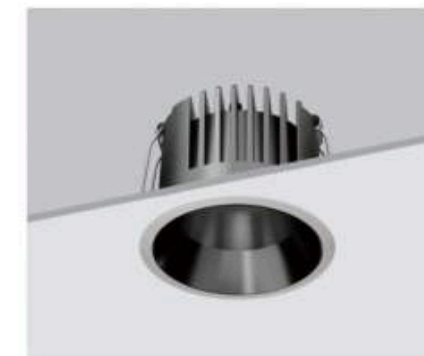

Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
防眩大师-55嵌入式	7W	COB	≥95	80lm/W	3000K 5000K 3500K 6000K 4000K
防眩大师-75嵌入式	12W				
防眩大师-95嵌入式	18W				

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installation 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP54


Reflector Colours 防眩杯
● ● ● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm

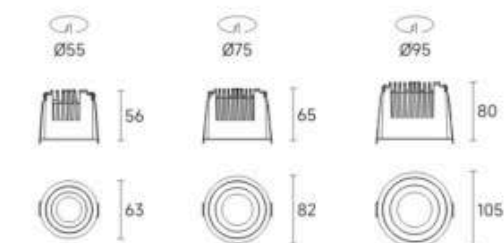

Photometric 光学角度

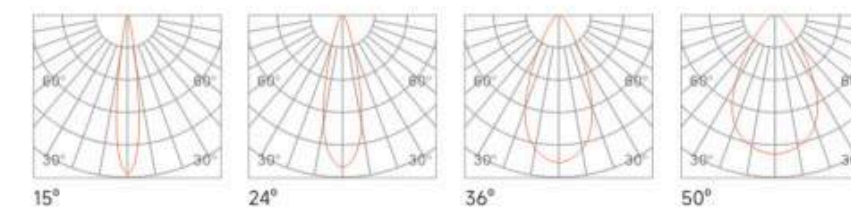

OPTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

ANTI-GLARE MASTER SERIES

RECESSED SPOTLIGHT



ANTI-GLARE MASTER
防眩大师



ANTI-GLARE MASTER
防眩大师

双镜大师

INNOVATIVE STRUCTURAL

DESIGN

创新结构设计

一灯双境，光影随心



DUAL REALM MASTER

SERIES

双镜大师

REVOLUTIONARY LINEAR GRILLE LIGHT

一款颠覆传统的线条格栅灯

创新双光学系统与双境切换结构设计，氛围模式下，透镜外凸化身装饰灯，光线柔和，装点家居格调；专业模式下，透镜内嵌贴合天花，防眩高亮，媲美星级酒店照明。明装、嵌入两种形态自由转换，一灯两用，兼顾颜值与实用，重新定义线条格栅灯照明。

Adopting an innovative dual optical system and dual-scene switching structure. In ambient mode, the lens protrudes to serve as a decorative light with soft glow that elevates home aesthetics. In professional mode, the lens retracts to sit flush with the ceiling, delivering anti-glare, high-brightness lighting comparable to that in star-rated hotels. It freely switches between surface-mounted and recessed installation. Dual functions in one fixture, combining beauty and practicality, redefines linear grille lighting.

INNOVATIVE STRUCTURAL
DESIGN
创新双光学结构设计

按压一次透镜全嵌，按压两次透镜凸出
Press once for recessed, twice for protruding



DUAL REALM MASTER
双镜大师系列

ONE LAMP
TWO AMBIENCES

一灯双境，光影随心

氛围模式：
透镜外凸化身装饰灯，
灯光柔和

Atmosphere mode:
The convex lens is transformed into a
decorative light, emitting soft light



专业模式：
透镜内嵌贴合天花，
防眩高亮

Professional mode:
Lens embedded and fitted to the
ceiling, anti-glare and high
brightness



DUAL REALM MASTER
双镜大师系列

创新双光学系统结构设计



一灯两用，明装、嵌入两种形态自由转换。

Innovative dual optical system structure

One lamp for two applications, convertible between surface mount and recessed mount.

双镜大师-5头嵌入式


145×35mm
10W

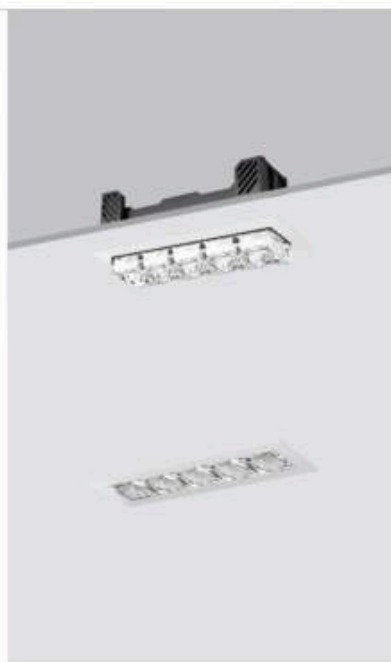

按压一次透镜全嵌，按压两次透镜凸出
Press once for recessed, twice for protruding

双镜大师-10头嵌入式

278×35mm
20W



按压一次透镜全嵌，按压两次透镜凸出
Press once for recessed, twice for protruding

DUAL REALM MASTER
双镜大师系列

双镜大师-5头无边框

145×35mm
10W



按压一次透镜全嵌，按压两次透镜凸出
Press once for recessed, twice for protruding

双镜大师-10头无边框

278×35mm
20W



按压一次透镜全嵌，按压两次透镜凸出
Press once for recessed, twice for protruding

DUAL REALM MASTER 双镜大师系列



Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
双镜大师-5头嵌入式	5×2W	COB	≥95	80lm/W	● 3000K ○ 5000K ● 3500K ● 6000K ● 4000K

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installtion 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
Clear PMMA
透明亚克力

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm



Photometric 光学角度

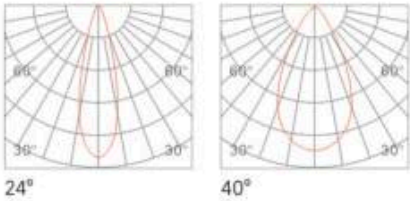

ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

DUAL REALM MASTER 双镜大师系列



Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
双镜大师-10头嵌入式	10×2W	COB	≥95	80lm/W	● 3000K ○ 5000K ● 3500K ● 6000K ● 4000K

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installtion 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
Clear PMMA
透明亚克力

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm

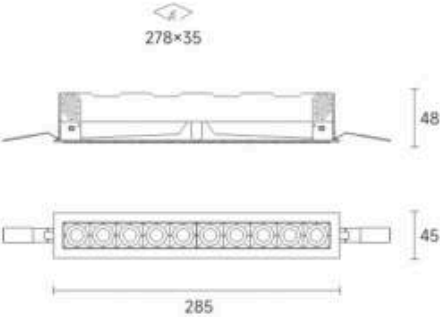

Photometric 光学角度

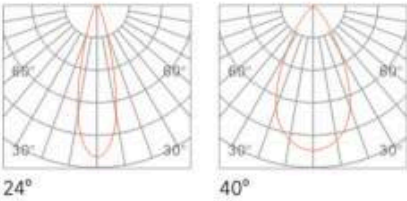

ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

DUAL REALM MASTER 双镜大师系列



Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
双镜大师-5头无边框	5×2W	COB	≥95	80lm/W	● 3000K ○ 5000K ● 3500K ● 6000K ● 4000K

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installtion 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
Clear PMMA
透明亚克力

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm



Photometric 光学角度

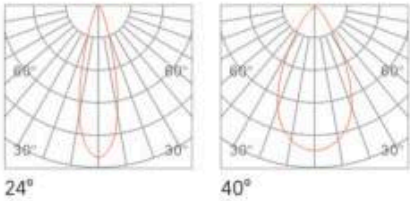

ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

DUAL REALM MASTER 双镜大师系列



Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
双镜大师-10头无边框	10×2W	COB	≥95	80lm/W	● 3000K ○ 5000K ● 3500K ● 6000K ● 4000K

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installtion 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
Clear PMMA
透明亚克力

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm

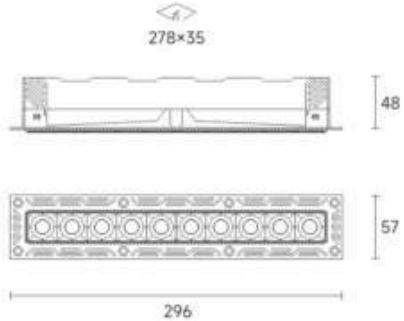

Photometric 光学角度

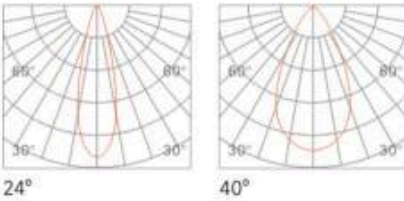

ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE


SWAP MASTER

SERIES

替换大师

SWAP MASTER SERIES

替换大师

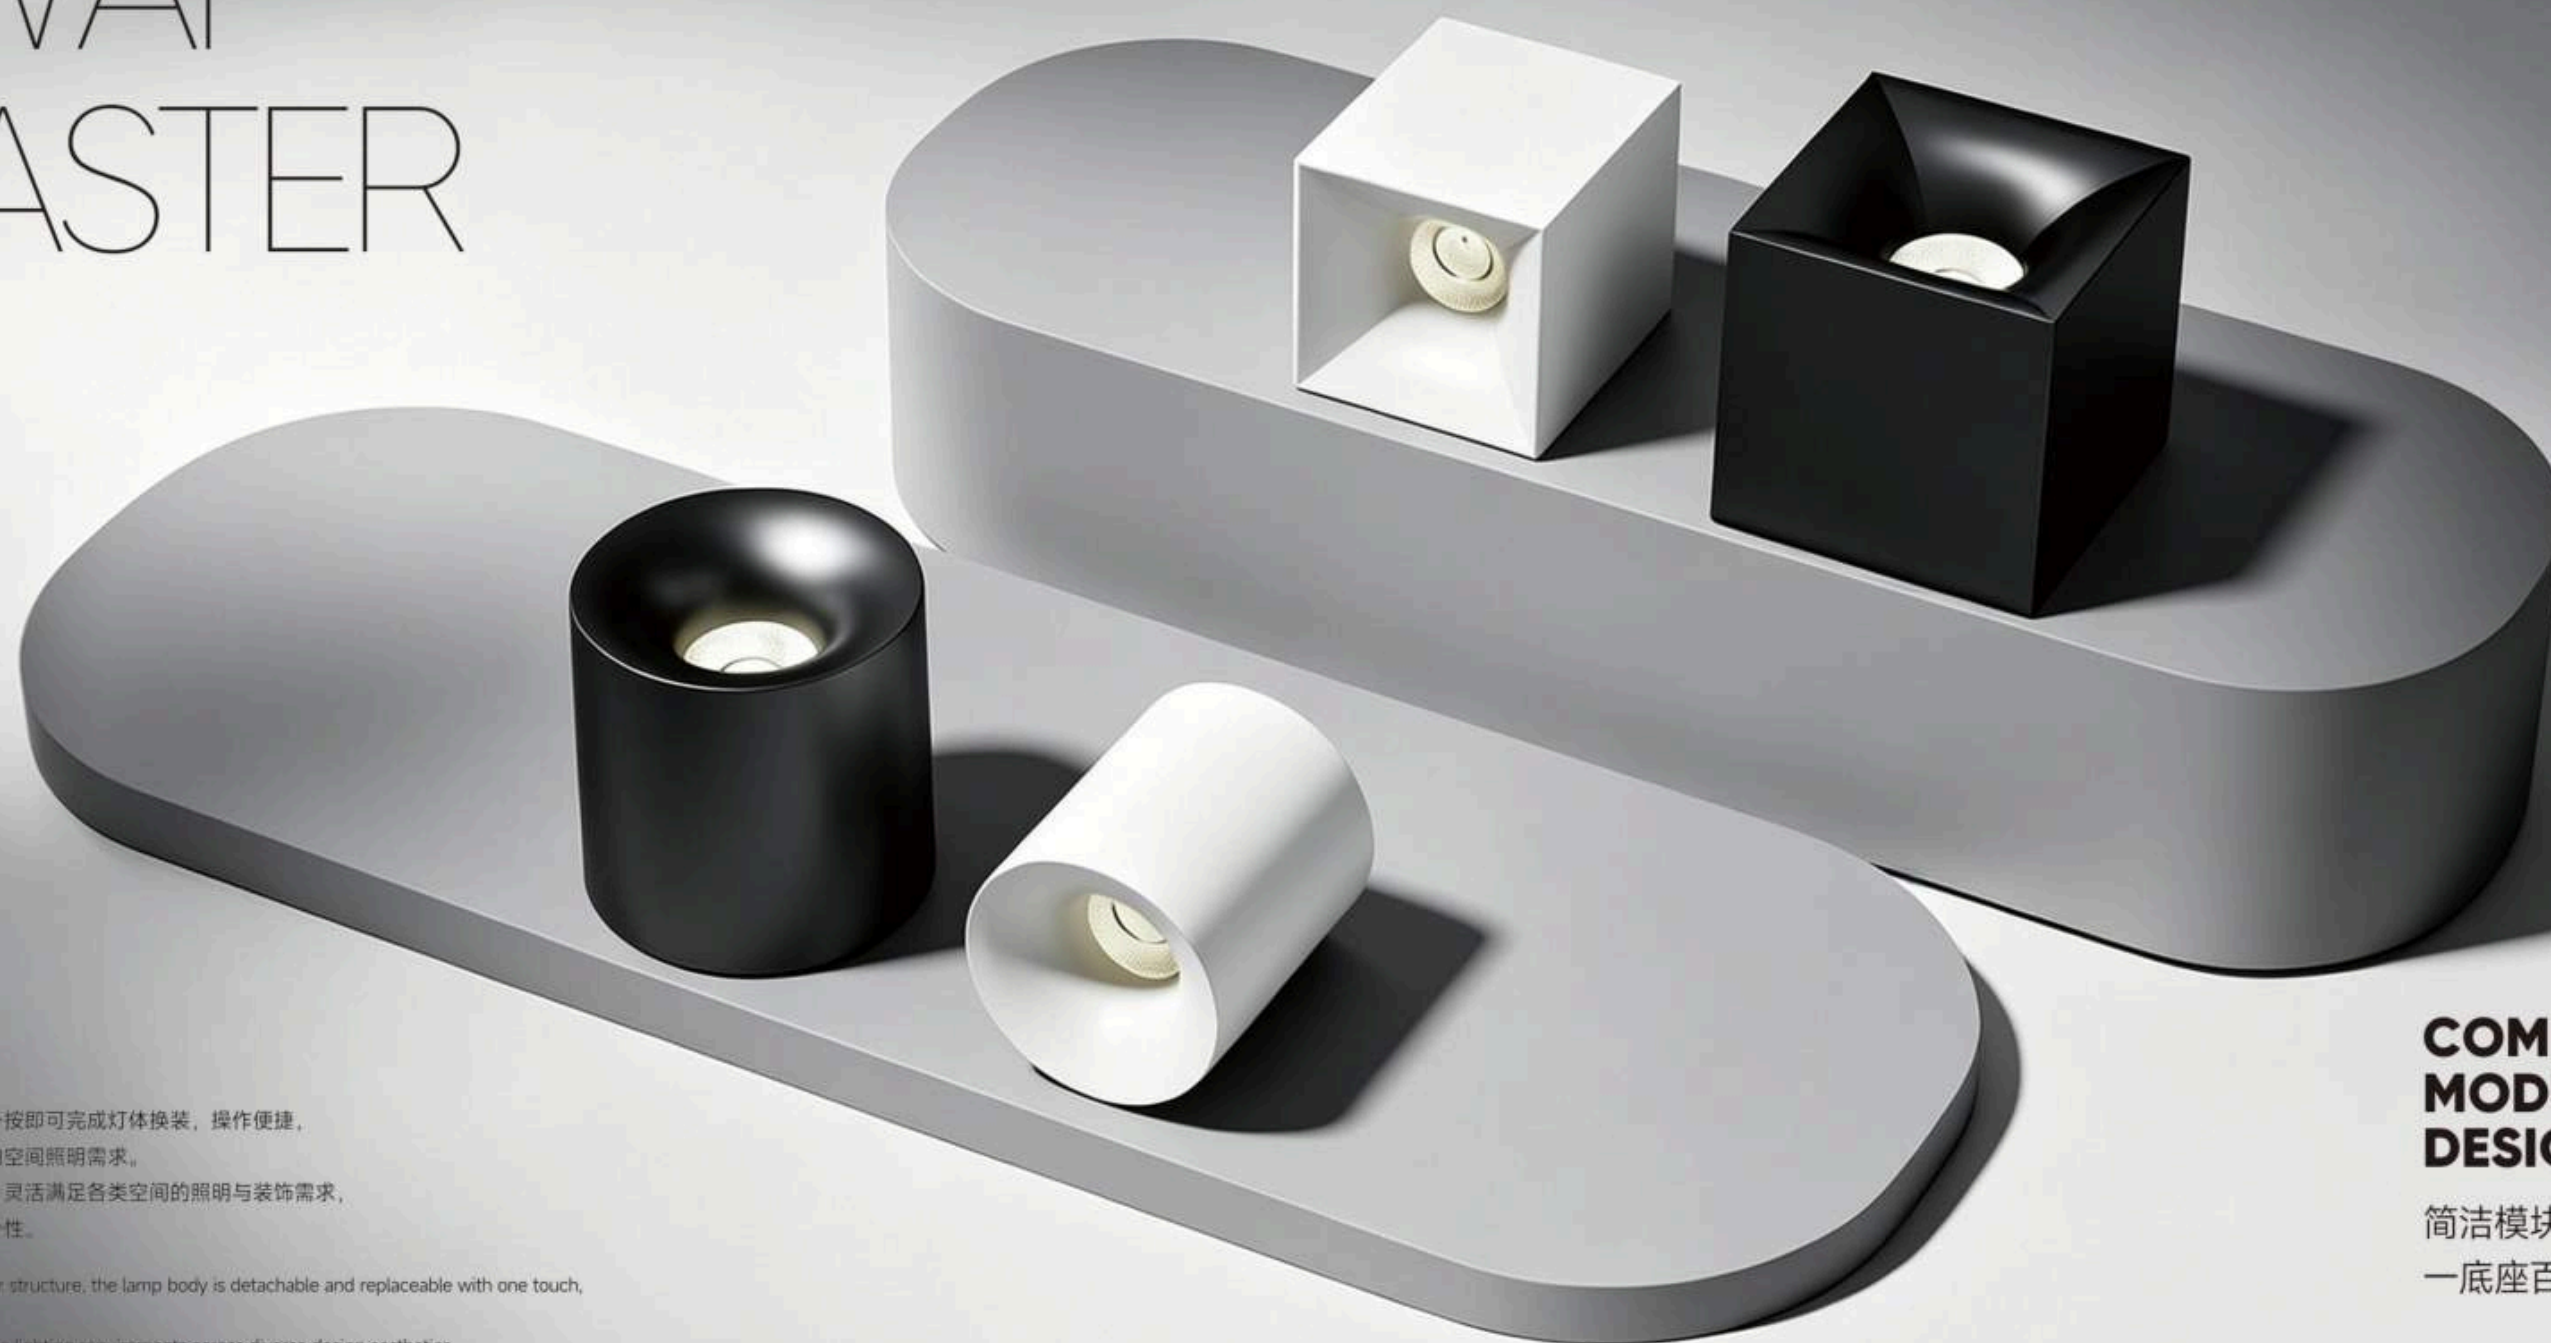

简洁模块化设计，轻轻一按即可完成灯体换装，操作便捷，
轻松适配不同设计风格的空间照明需求。
固定底座搭配百变灯体，灵活满足各类空间的照明与装饰需求，
让空间照明更具创意与个性。

Featuring a concise modular structure, the lamp body is detachable and replaceable with one touch,
delivering effortless use.
It adapts seamlessly to space lighting requirements across diverse design aesthetics.
Combining a stable base with interchangeable lamp bodies, it caters flexibly to lighting and decorative
needs in all scenarios, endowing space lighting with unique creativity and character.

**COMPACT
MODULAR
DESIGN**

简洁模块化设计
一底座百变灯体



FULL METAL EXQUISITE

DESIGN

全金属精致外观设计



SWAP MASTER SERIES
替换大师


简洁模块化设计
轻轻一按百变换装

C R E A T I V E D E S I G N



通用底座可以替换全系灯体
Universal base for all lamp models



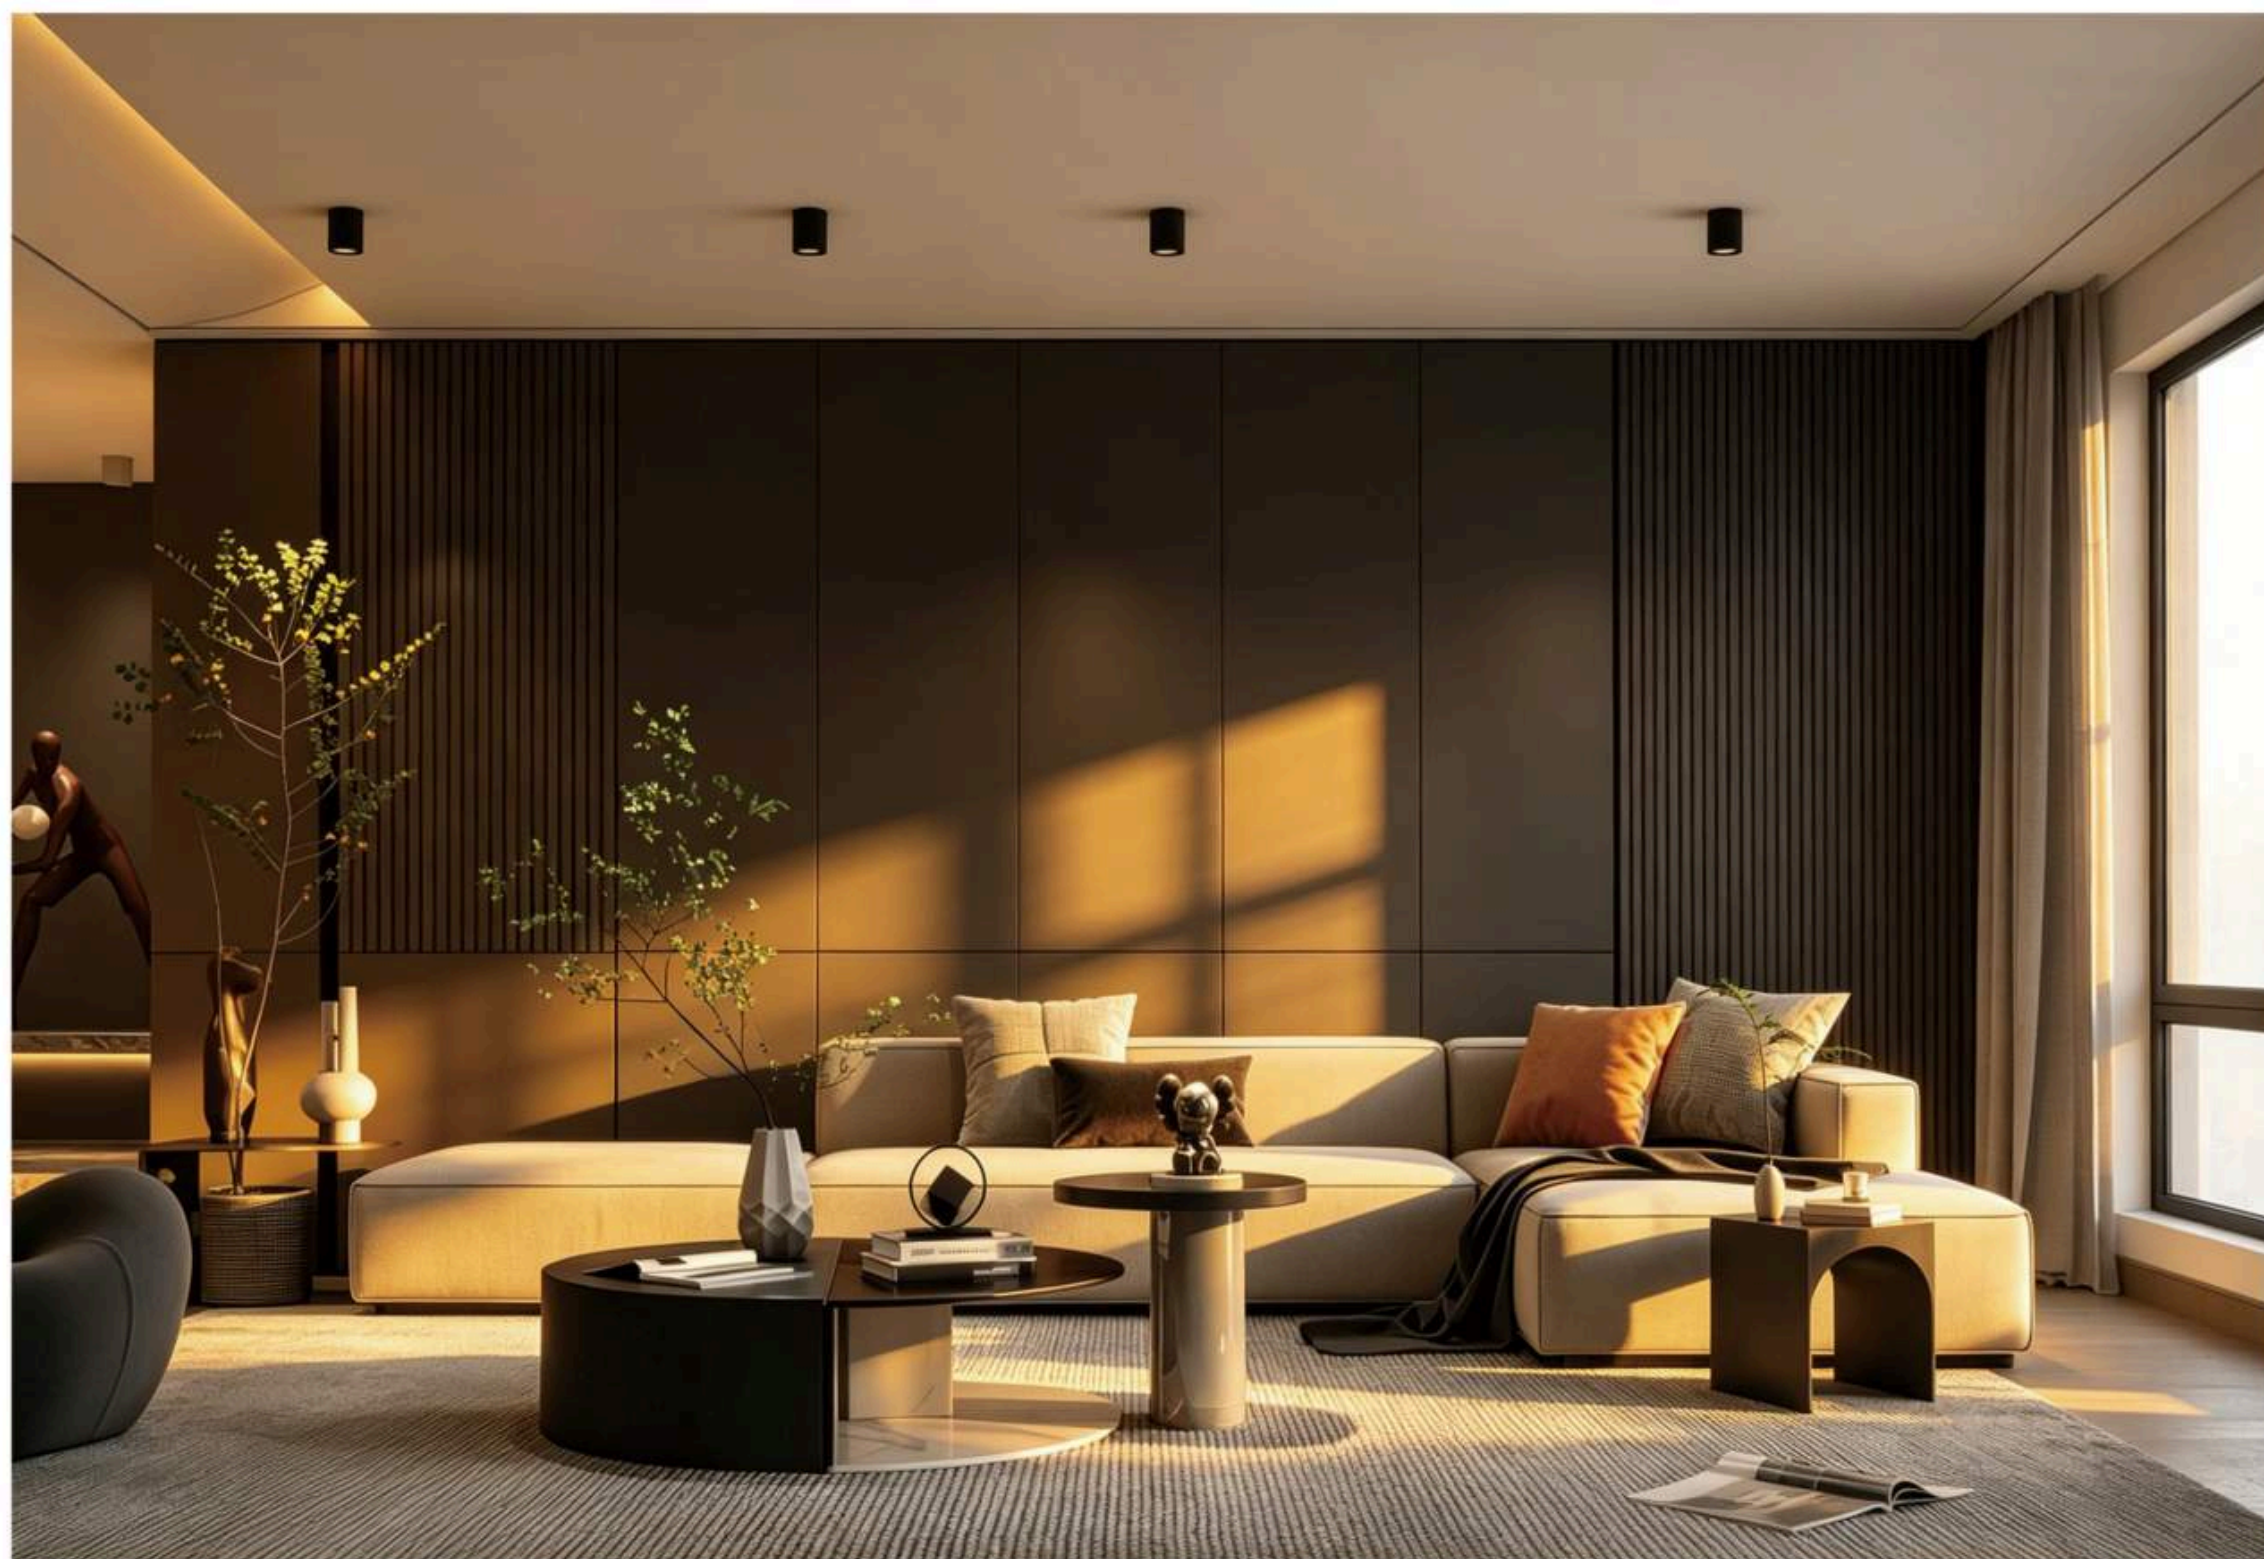

SWAP MASTER SERIES

替换大师

CREATIVE
INDIVIDUAL
LIGHTING

让空间照明更具创意与个性



SWAP MASTER SERIES

替换大师

一个底座搭配百变灯体

简洁模块化设计，轻轻一按即可完成灯体换装，操作便捷，轻松适配不同设计风格的空间照明需求。

Single base matches various lamp styles

Adopting a concise modular design, the lamp body can be replaced with one press. It is user-friendly and adaptable to space lighting demands of various design styles.

Ø70×81mm / 10W
Ø86×87mm / 15W



替换大师-圆形弧面明装



70×70×81mm / 10W
86×86×87mm / 15W



替换大师-方形弧面明装



多种灯体颜色选择 (全金属一体杯)

Multiple lamp body color options (Integrated all-metal cup)



砂黑 Sand black



砂白 Sand white



哑金 Matte gold




哑灰 Matte grey

※ Customizable brand latex paint in the same color: Cocoa Egg Cream/Spring Rain, Linghua White/Pearl White, Ru Kiln/Apricot Grey
可定制品牌乳胶漆同色：可可蛋奶/春雨，菱花白/珍珠白，汝窑/杏子灰

SWAP MASTER SERIES

替换大师

THE HOME OF LIGHT

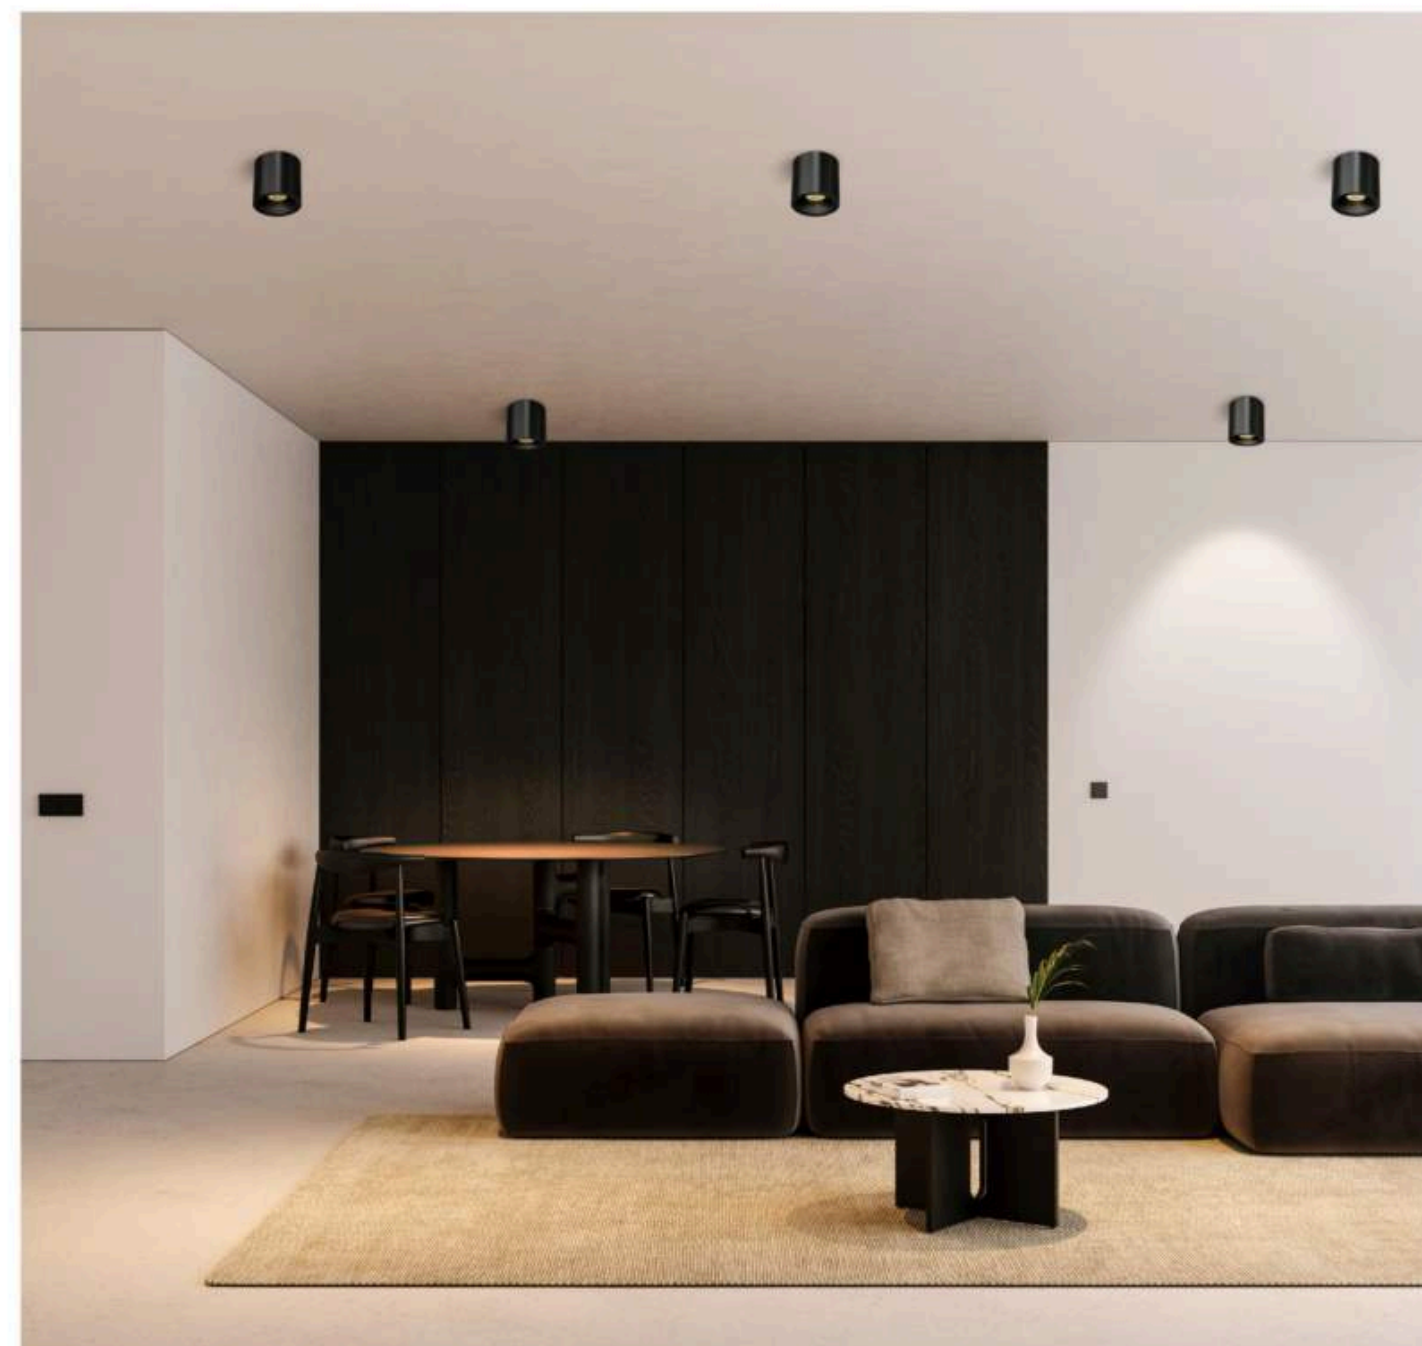

SWAP MASTER SERIES 替换大师



Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
替换大师-70圆形弧面	10W	COB	≥95	80lm/W	● 3000K ○ 5000K ● 3500K ● 6000K
替换大师-86圆形弧面	15W				● 4000K

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installtion 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Lamp Body Color 灯体颜色
● ● ● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm



Photometric 光学角度

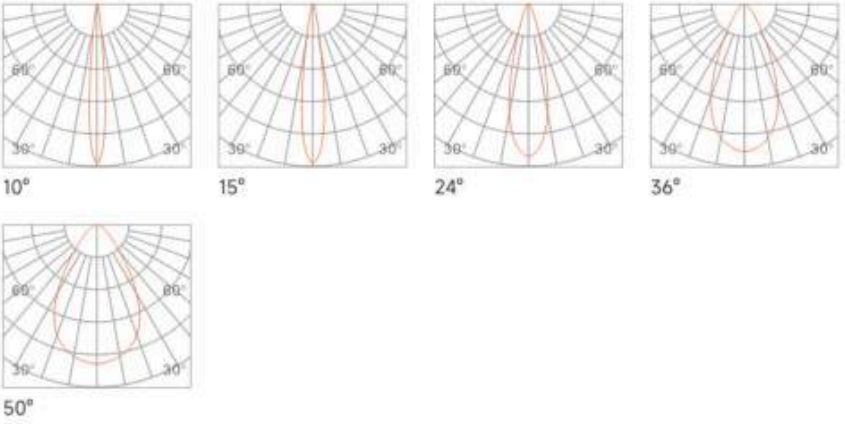

ORTIONS	
1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

SWAP MASTER SERIES 替换大师



Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
替换大师-70方形弧面	10W	COB	≥95	80lm/W	● 3000K ○ 5000K ● 3500K ● 6000K
替换大师-88方形弧面	15W				● 4000K

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installtion 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Lamp Body Color 灯体颜色
● ● ● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm



Photometric 光学角度

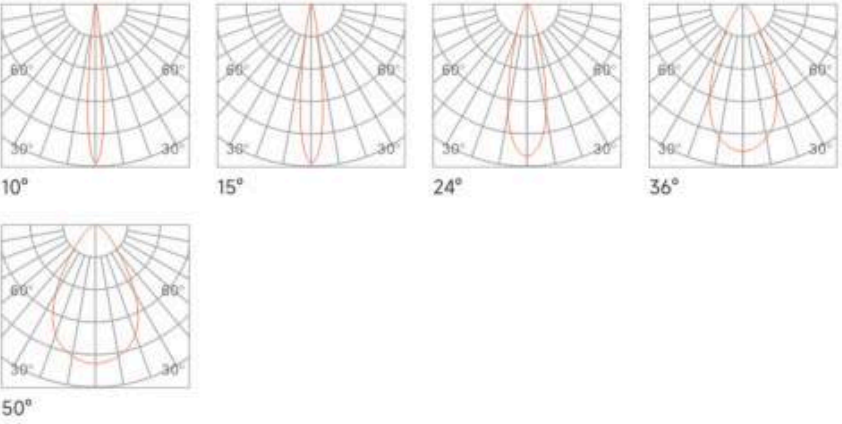

ORTIONS	
1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

SHADOWE

8S

SERIES


SHADOWE SERIES 光影8S

8S 系列射灯支持三档高度调节，随心切换截光角度，打造层级化防眩体验。
创新交叉出光光学结构结合浮动透镜设计，高效平衡防眩性能与出光效率。
精准控光抑眩，质感光影出众，完美契合酒店、豪宅等高端场景的高品质照明需求。

The 8S series spotlights support three levels of height adjustment, allowing for flexible switching of cutting angles and creating a hierarchical anti glare experience.
Innovative cross light output optical structure combined with floating lens design, efficiently balancing anti glare performance and light output efficiency.
Accurate control of light and glare, outstanding texture of light and shadow, perfectly meeting the high-quality lighting needs of high-end scenes such as hotels and luxury homes.



创新三档升降调节 Innovative three-gear height adjustment


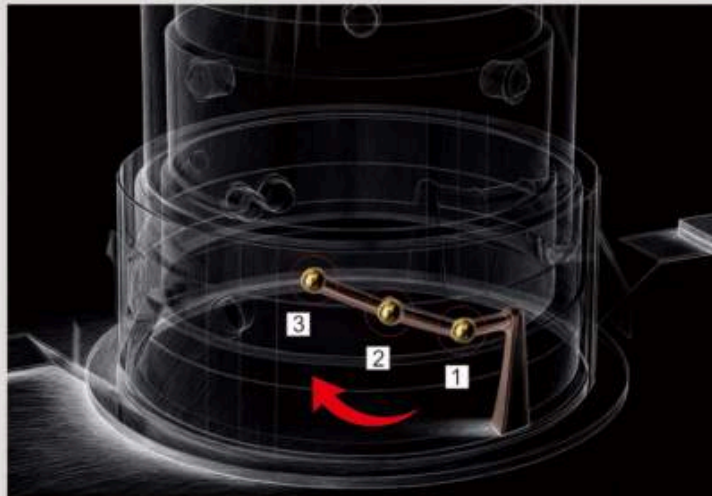


ROTATE height-adjustable

旋转灯体调节三种不同高度

新型可调节防眩设计，通过旋转灯体调节钢珠位置，实现灯体三种不同高度尺寸，形成三种不同的截光角，从而满足不同层高的空间照明需求。

The new adjustable anti glare design adjusts the position of the steel ball by rotating the lamp body, achieving three different height sizes of the lamp body and forming three different cutoff angles to meet the lighting needs of different floor heights.

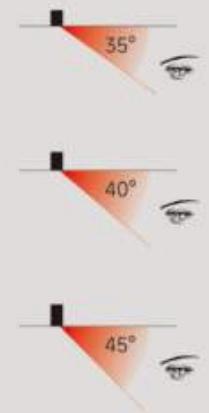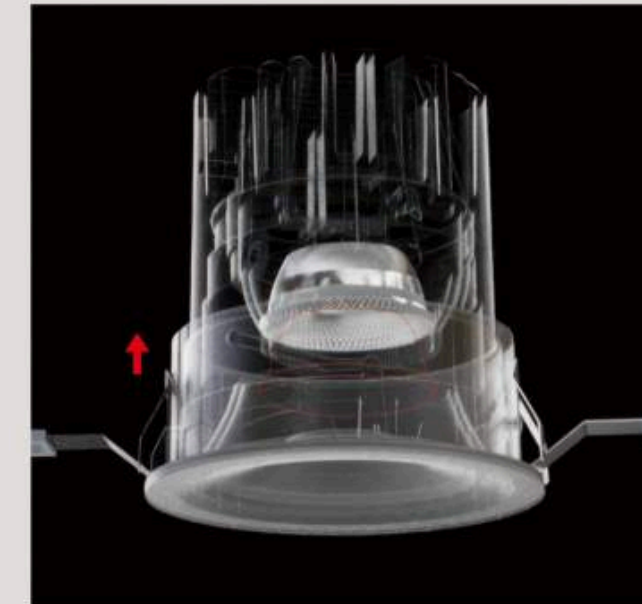

ANTI GLARE ADJUSTABLE

光源模组三种高度可调，实现三档防眩效果

By rotating and adjusting the position of the steel ball, the height of the lamp body can be adjusted while achieving three levels of anti glare effect



SUSPENDED
HIGH-CONFIGURATION MODULE

悬浮高配模块

灯体内部可以实现旋转与调角，让照明更灵活



交叉出光
Cross Out Light



防眩多棱透镜
Anti glare multi lens



高围坝光学
High walled dam optics

CHOOSE

Multiple options for mounting trims.



SHADOWE 8S SERIES
光影8S


8S SERIES

三档防眩深度调节

轻松切换三种遮光角，实现不同防眩效果，灵活适配各类层高空间，照明更精准舒适。

Three-level anti-glare depth adjustment

Easily switch between three shading angles for varied anti-glare effects, flexibly adapting to spaces of different ceiling heights for more precise and comfortable lighting.

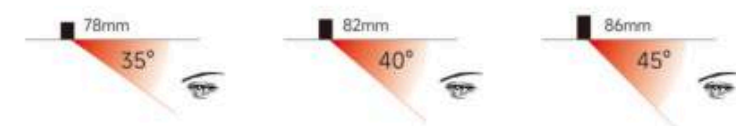

※ The 55mm cutout version does not support a 15° and 50° beam angle configuration.
55mm开孔款式，不支持15°和50°光束角配置。

8S SERIES


防眩杯颜色选择

Anti-glare cup color options



不同出光方式面环选择

Optional face rings with different light output designs

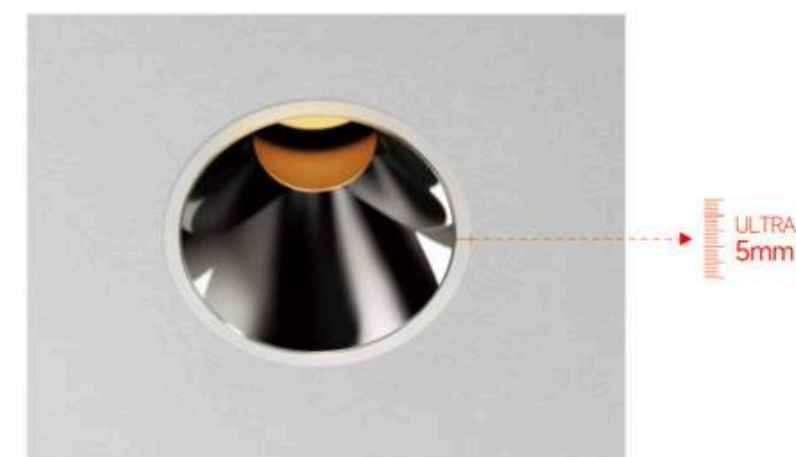


5mm 超窄边框，与天花更贴合
5mm ultra-narrow trim

SHADOWE 8S SERIES
光影8S

SHADOWE 8S SERIES



Three level height adjustment: 78/82/86mm
三档高度调节

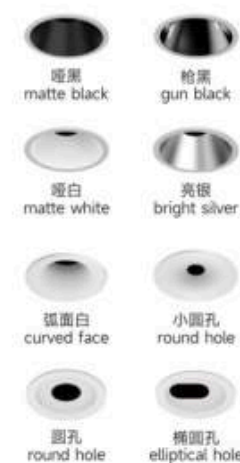

Accessories 配件



Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
8S-55圆形嵌入式	9W	COB	≥95	80lm/W	● 3000K ○ 5000K ● 3500K ○ 6000K ○ 4000K
8S-75圆形嵌入式	15W				

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installation 安装
Recessed
☒ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯

Operating Temp 工作溫度
-25°C - 50°C


UGR 眩光值
≤6



Dimension 尺寸
unit:mm

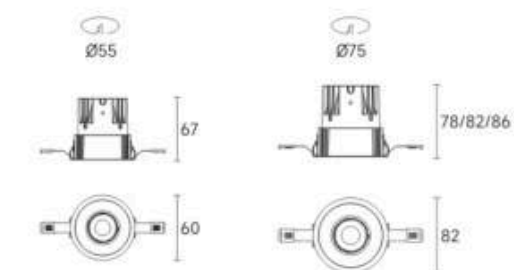

Photometric 光学角度

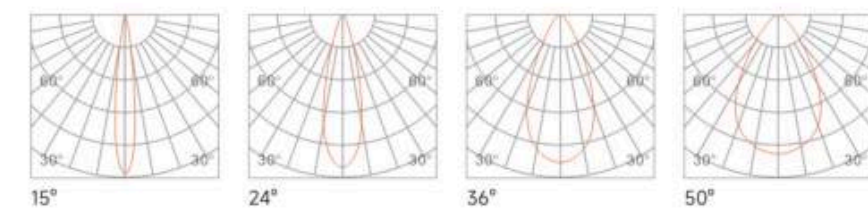

OPTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

* The 55mm cutout version does not support a 15° and 50° beam angle configuration.
55mm开孔款式，不支持15°和50°光束角配置

SHADOWE 8S SERIES



Three level height adjustment: 78/82/86mm
三档高度调节



Accessories 配件



Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
8S-75圆形嵌入式	15W	COB	≥95	80lm/W	● 3000K ○ 5000K ● 3500K ○ 6000K ● 4000K

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installation 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ● ● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤6



Dimension 尺寸
unit:mm




Photometric 光学角度

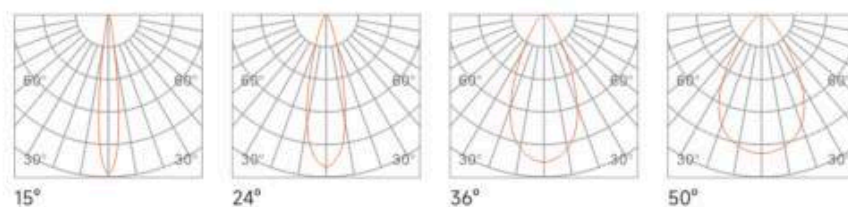

ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

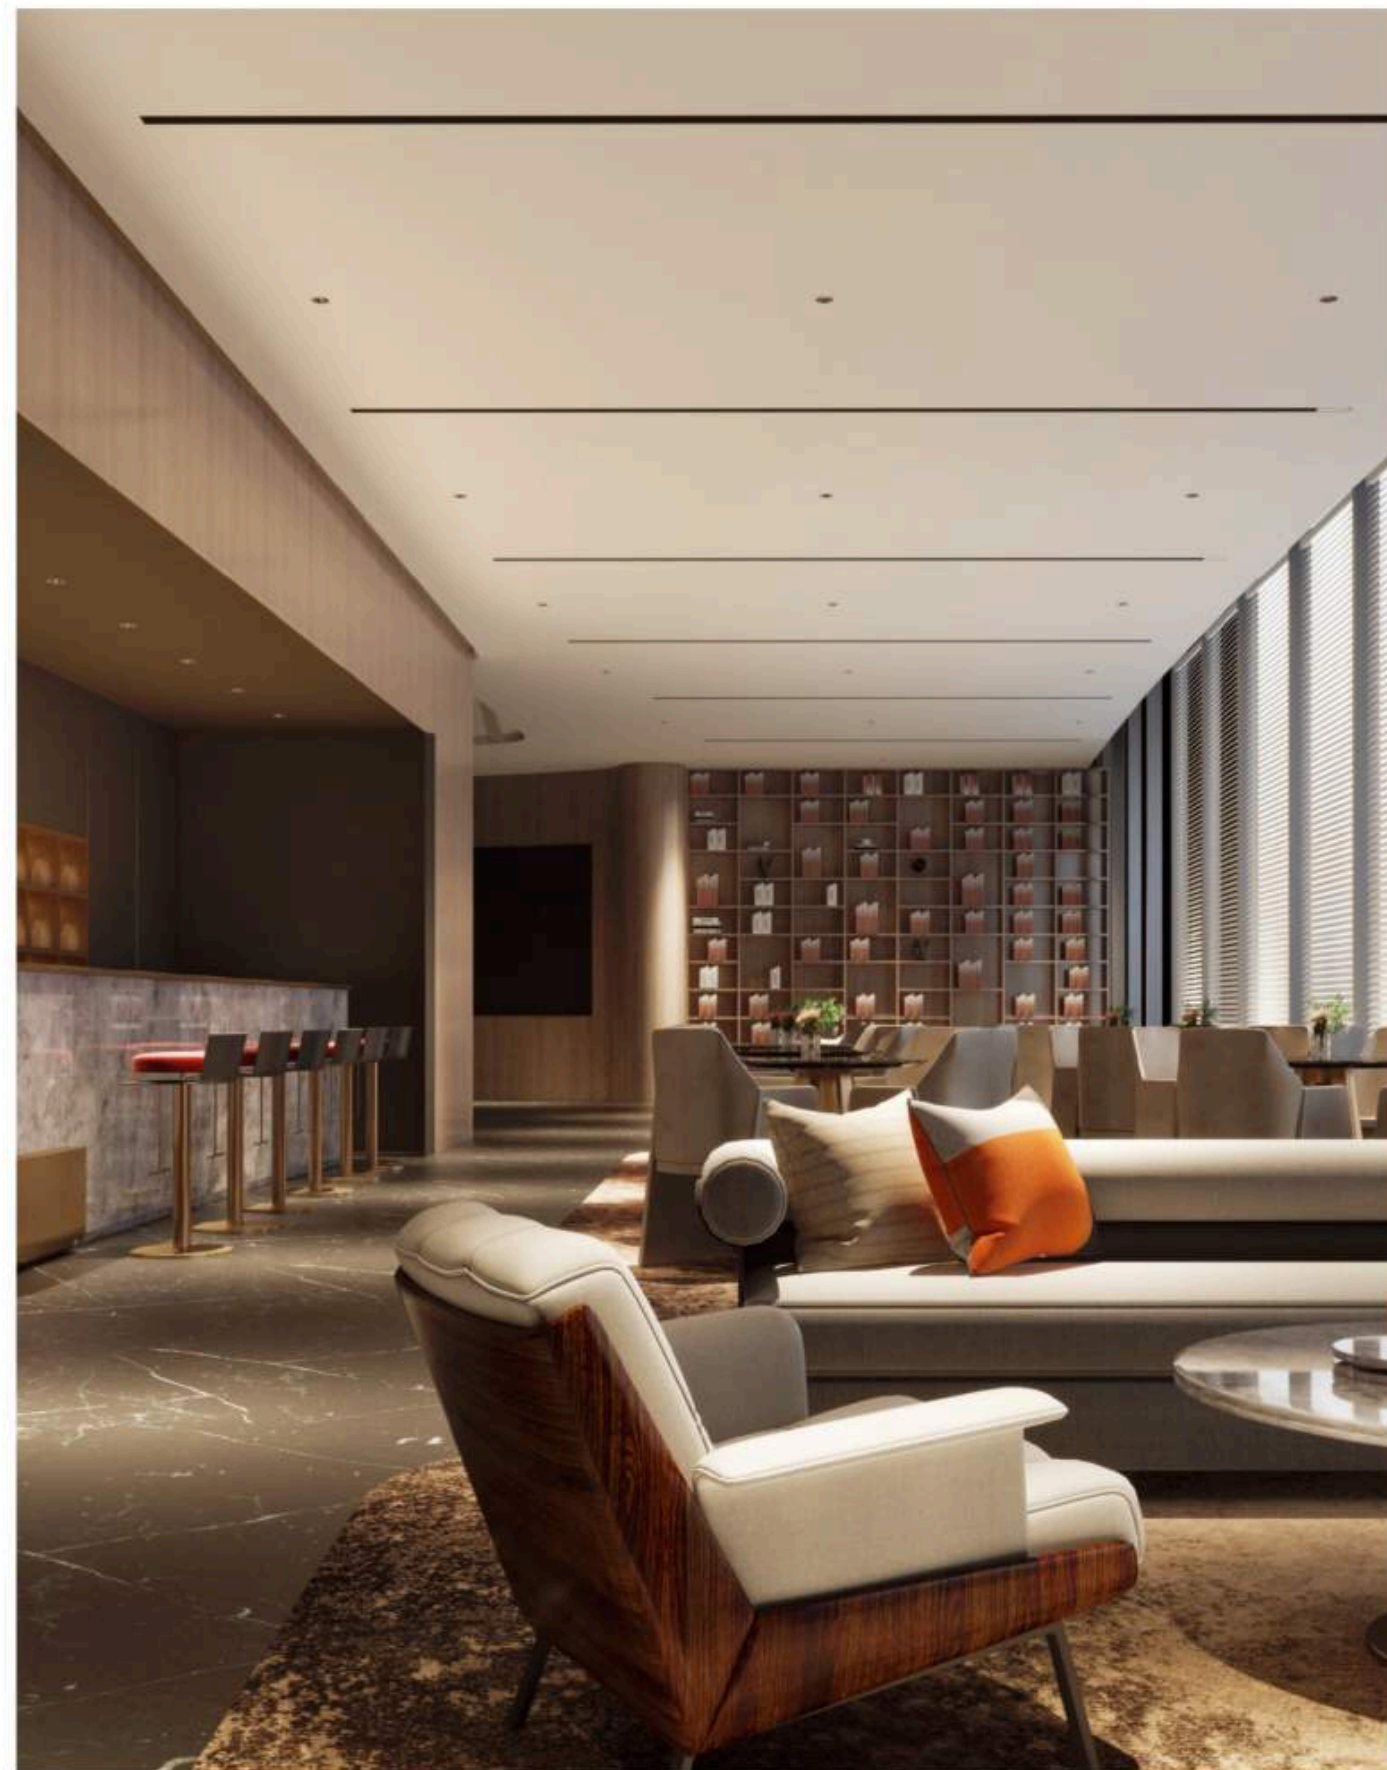

SHADOWE 8S SERIES



Three level height adjustment: 78/82/86mm
三档高度调节



Accessories 配件



Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
8S-75方形嵌入式	15W	COB	≥95	80lm/W	● 3000K ○ 5000K ● 3500K ● 6000K ● 4000K

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installtion 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ● ● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤6



Dimension 尺寸
unit:mm



Photometric 光学角度

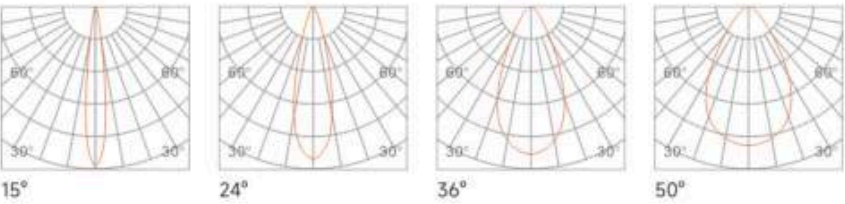

ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

SHADOWE 8S SERIES



Three level height adjustment: 78/82/86mm
三档高度调节



Accessories 配件



Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
8S-75方形无边框	15W	COB	≥95	80lm/W	● 3000K ○ 5000K ● 3500K ● 6000K ● 4000K

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installtion 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ● ● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤6



Dimension 尺寸
unit:mm



Photometric 光学角度

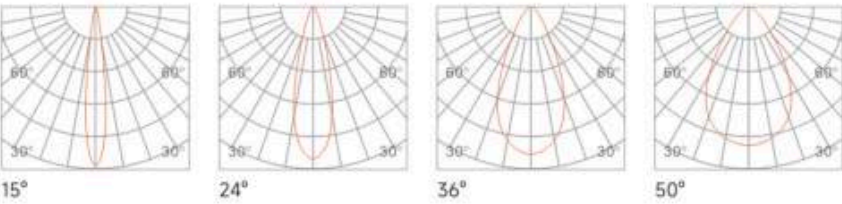

ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

SHADOWE 8S SERIES



Three level height adjustment: 78/82/86mm
三档高度调节



Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
8S-75双头方形嵌入式	2×15W	COB	≥95	80lm/W	● 3000K ○ 5000K ● 3500K ● 6000K ● 4000K

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installtion 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ● ● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤6



Dimension 尺寸
unit:mm



Photometric 光学角度

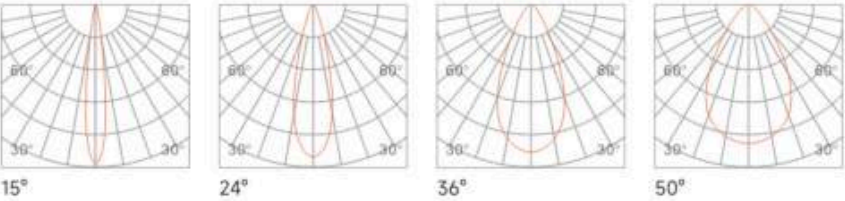

ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

SHADOWE 8S SERIES



Three level height adjustment: 78/82/86mm
三档高度调节



Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
8S-75双头方形无边框	2×15W	COB	≥95	80lm/W	● 3000K ○ 5000K ● 3500K ● 6000K ● 4000K

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installtion 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ● ● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤6



Dimension 尺寸
unit:mm



Photometric 光学角度

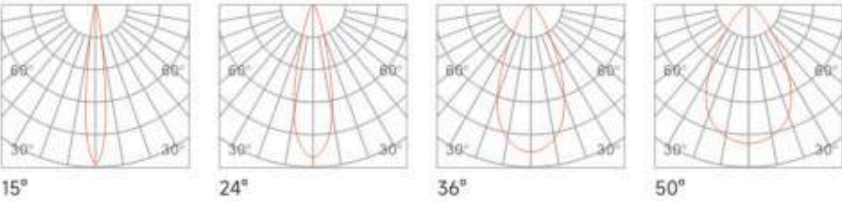

ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

HOTEL LUXURY VILLA LIGHTING

酒店、豪宅照明新宠

SHADOWLESS SERIES

RECESSED SPOTLIGHT



MULTIPLE SIZES P6

SERIES

P6 SERIES

涵盖 35mm-95mm 全规格开孔尺寸，搭载大口径光学透镜，出光效率优异。
搭配高性能散热器，散热稳定高效，实现功率升级。
兼顾实用与品质，全面适配各类商用及家装大小空间品质照明需求。

Covering a full range of hole sizes from 35mm to 95mm, equipped with large aperture optical lenses, with excellent light output efficiency.
Paired with high-performance heat sinks, the heat dissipation is stable and efficient, achieving power upgrades.
Balancing practicality and quality, fully adapting to various commercial and home decoration space quality lighting needs.



P7 SERIES

**SMALL SIZE
HIGH POWER**

小开孔 大功率

涵盖 35mm-95mm 全规格开孔尺寸，搭载大口径光学透镜，
小开孔大功率，可适用于家居、酒店、商业空间等照明需求

Covering a full range of aperture sizes from 35mm to 95mm, equipped
with a large-aperture optical lens,
Small opening and high power, suitable for lighting needs in homes,
hotels, commercial spaces, etc.



LARGE LENS

大透镜 高光效



HIGH — EFFICIENCY

防眩有道，光效出众



P6 SERIES

全金属款

一体金属杯身，简约更显高级

All metal version

One piece metal cup body, simple yet sophisticated.



多种金属面环与防眩杯选择

Multiple metal face rings and anti glare cup options



* The 35mm cutout version does not support a 50° beam angle configuration.
35mm开孔款式，不支持 50° 光束角配置

P6 SERIES

PC防眩杯款

高光效与防眩最佳平衡，多尺寸选择，满足不同高度的空间照明需求

PC anti-glare cup version

High efficacy & anti-glare balanced perfectly, Multiple sizes for spaces of different heights.



防眩杯颜色选择

Anti-glare cup color options



P6 SERIES



Integrated metal anti-glare cup
一体金属防眩杯



Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
P6-35圆形嵌入式	5W	COB	≥95	80lm/W	3000K 5000K 3500K 6000K 4000K
P6-45圆形嵌入式	7W				
P6-55圆形嵌入式	9W				

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installation 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm

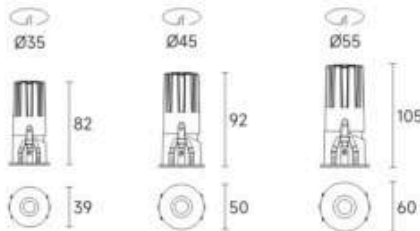

Photometric 光学角度

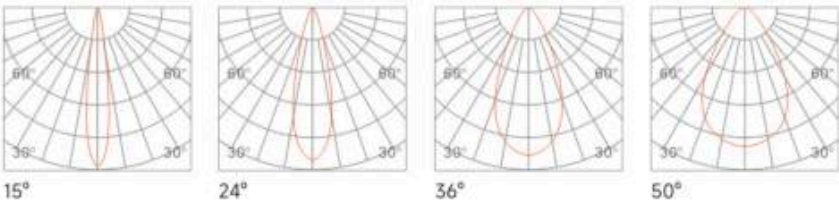

※ The 35mm cutout version does not support a 50° beam angle configuration.
35mm开孔款式，不支持 50° 光束角配置

ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

P6 SERIES



Metal secondary cup
金属二次杯



Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
P6-35圆形无边框	5W	COB	≥95	80lm/W	3000K 5000K 3500K 6000K 4000K
P6-45圆形无边框	7W				
P6-55圆形无边框	9W				

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installation 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm

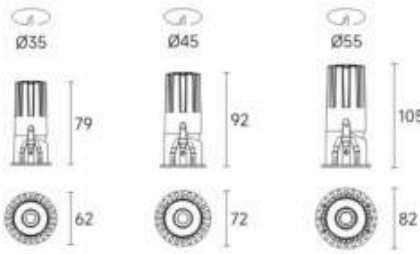

Photometric 光学角度

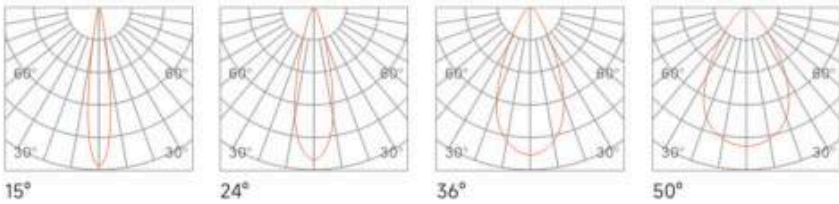

※ The 35mm cutout version does not support a 50° beam angle configuration.
35mm开孔款式，不支持 50° 光束角配置

ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

P6 SERIES



Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
P6-55圆形嵌入式	5W	COB	≥95	80lm/W	3000K 5000K 3500K 6000K
P6-55高款圆形嵌入式	9W				4000K

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installtion 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ● ● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm

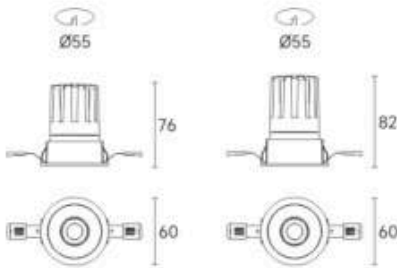

Photometric 光学角度

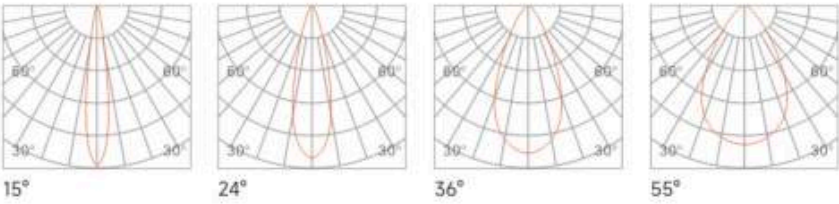

Accessories 配件



ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

P6 SERIES



Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
P6-55圆形无边框	5W	COB	≥95	80lm/W	3000K 5000K 3500K 6000K
P6-55高款圆形无边框	9W				4000K

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installtion 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ● ● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm

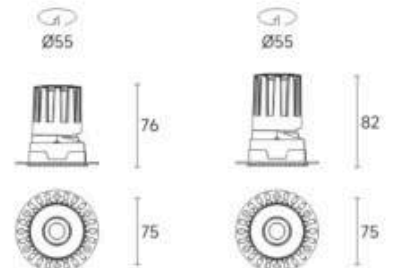

Photometric 光学角度

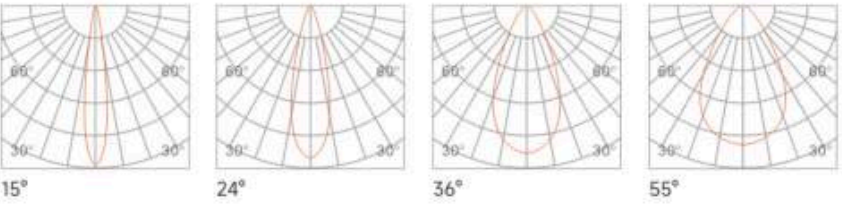

Accessories 配件



ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

P6 SERIES



Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
P6-75圆形嵌入式	12-15W	COB	≥95	80lm/W	3000K 5000K 3500K 6000K
P6-95圆形嵌入式	28-30W				4000K

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installtion 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ● ● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm

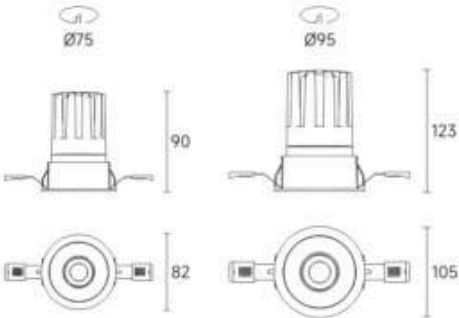

Photometric 光学角度

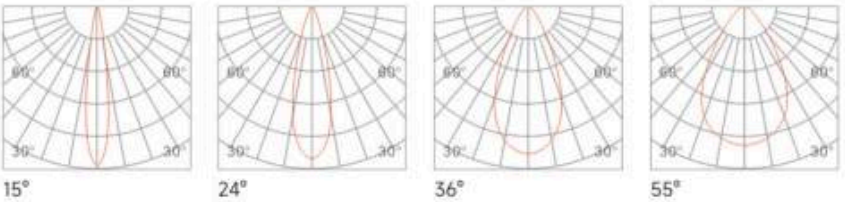

Accessories 配件



ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

P6 SERIES



Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
P6-75圆形无边框	12-15W	COB	≥95	80lm/W	3000K 5000K 3500K 6000K
P6-95圆形无边框	28-30W				4000K

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installtion 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ● ● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm

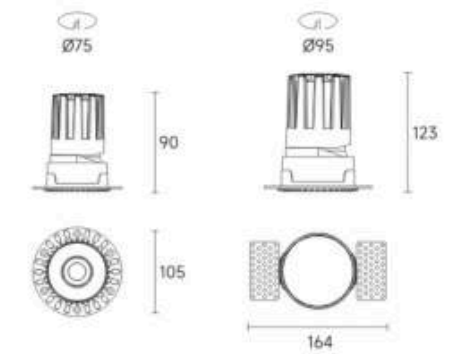

Photometric 光学角度

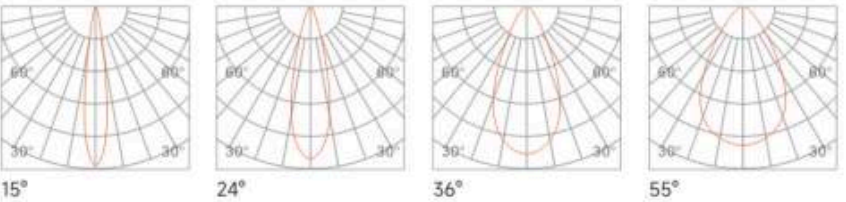

Accessories 配件



ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

GLOBAL LIGHTING

全维适配，全域照明

P6 SERIES

RECESSED SPOTLIGHT



P6 SERIES



Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
P6-55方形嵌入式	5W	COB	≥95	80lm/W	3000K 5000K 3500K 6000K 4000K
P6-55高款方形嵌入式	9W				
P6-75方形嵌入式	12-15W				

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installation 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ● ● ● ●

Operating Temp 工作温度
-25°C ~ 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm

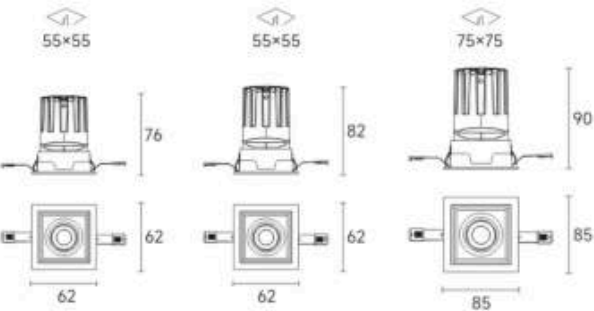

Photometric 光学角度

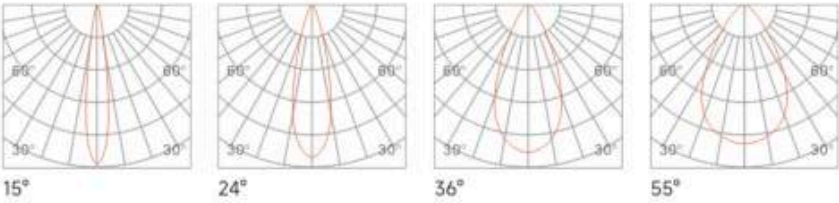

ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

Accessories 配件



P6 SERIES



Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
P6-55方形无边框	5W	COB	≥95	80lm/W	3000K 5000K 3500K 6000K 4000K
P6-55高款方形无边框	9W				
P6-75方形无边框	12-15W				

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installation 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ● ● ● ●

Operating Temp 工作温度
-25°C ~ 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm

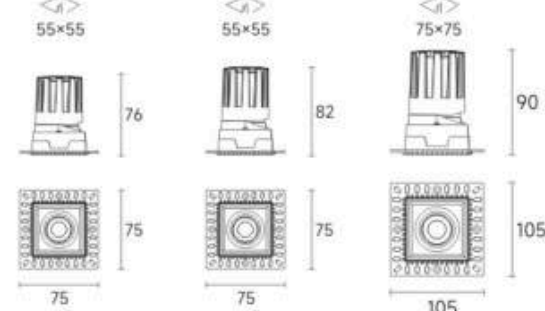

Photometric 光学角度

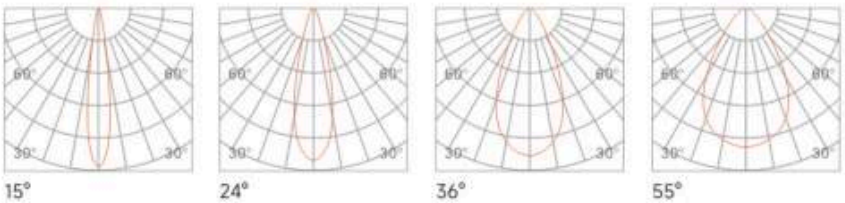

ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

Accessories 配件



P6 SERIES



Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
P6-55双头嵌入式	2×5W	COB	≥95	80lm/W	● 3000K ○ 5000K ● 3500K ○ 6000K ○ 4000K
P6-55高款双头嵌入式	2×9W				
P6-75双头嵌入式	2×12-15W				

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installation 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ● ● ● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm

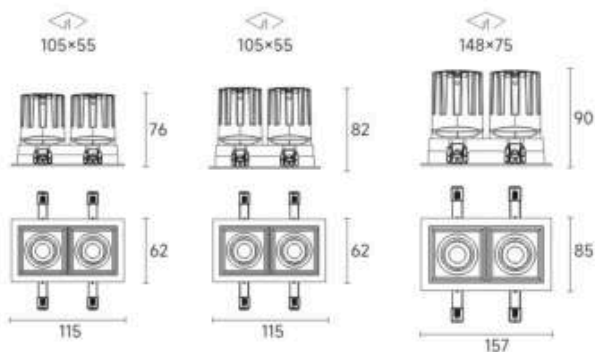

Photometric 光学角度

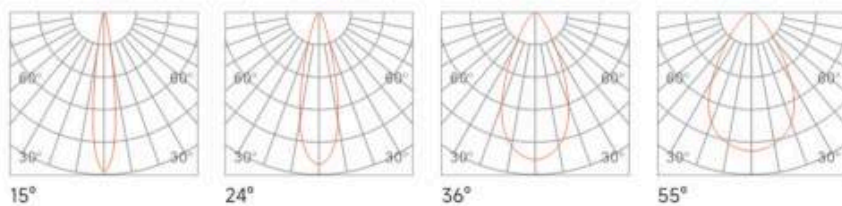

ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

Accessories 配件

Clear	Softening Lens	Honeycomb Louver

P6 SERIES



Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
P6-55双头无边框	2×5W	COB	≥95	80lm/W	● 3000K ○ 5000K ● 3500K ○ 6000K ○ 4000K
P6-55高款双头无边框	2×9W				
P6-75双头无边框	2×12-15W				

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installation 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ● ● ● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm

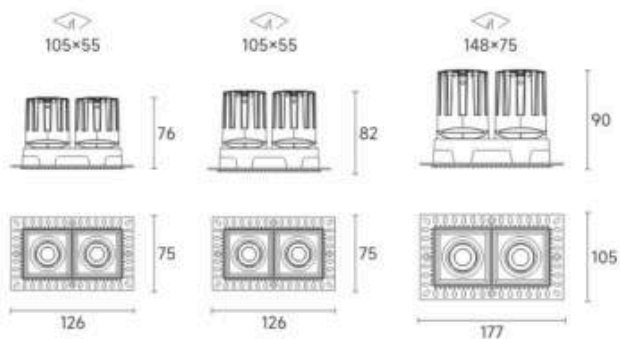

Photometric 光学角度

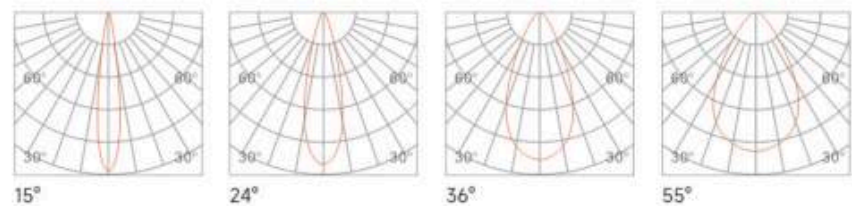

ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

Accessories 配件

Clear	Softening Lens	Honeycomb Louver

CLOVER

SERIES

四叶草 系列

CLOVER SERIES

四叶草 系列

精致金属拉丝质感，家族化设计，配件多样化，满足不同的照明需求；
全方位灯光服务，适用于别墅平层、商业餐厅、酒店、展馆等多种应用领域。

Exquisite metal brushed texture, family-style design, and diverse accessories meet different lighting needs;
Comprehensive lighting services are suitable for various applications, including single-level villas, restaurants, hotels, exhibition halls, and more.



YOUGU

BEAUTY OF METAL TEXTURE

金属拉丝质感之美



CLOVER SERIES
四叶草系列

YOUGU


CLOVER SERIES 四叶草系列

PC防眩杯款

多种高度尺寸与面环选择，满足更多的照明设计需求

PC anti-glare cup version

Multiple height dimensions and trim ring options are available to meet diverse lighting design requirements.

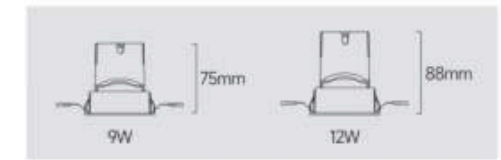


防眩杯颜色选择

Anti-glare cup color options



CLOVER SERIES 四叶草系列



ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

Accessories 配件



Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
四叶草-55圆形嵌入式	9W	COB	≥95	80lm/W	● 3000K ○ 5000K ● 3500K ● 6000K ○ 4000K
四叶草-75圆形嵌入式-75	9W				
四叶草-75圆形嵌入式-88	12W				
四叶草-95圆形嵌入式	24W				

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installation 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ● ● ● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm

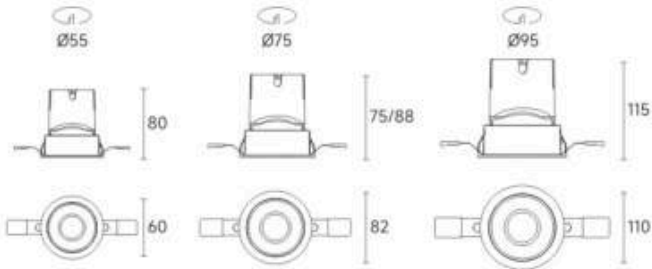

Photometric 光学角度

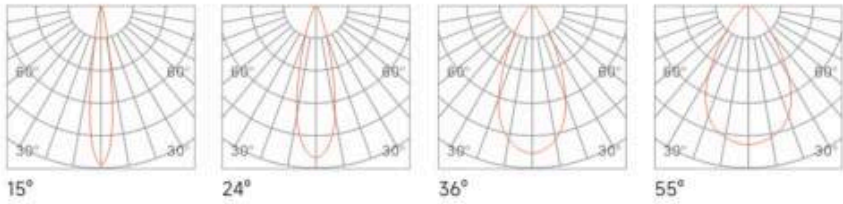

CLOVER SERIES 四叶草系列



ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

Accessories 配件



Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
四叶草-55圆形无边框	9W	COB	≥95	80lm/W	● 3000K ○ 5000K ● 3500K ● 6000K ○ 4000K
四叶草-75圆形无边框-75	9W				
四叶草-75圆形无边框-88	12W				
四叶草-95圆形无边框	24W				

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installation 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ● ● ● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm

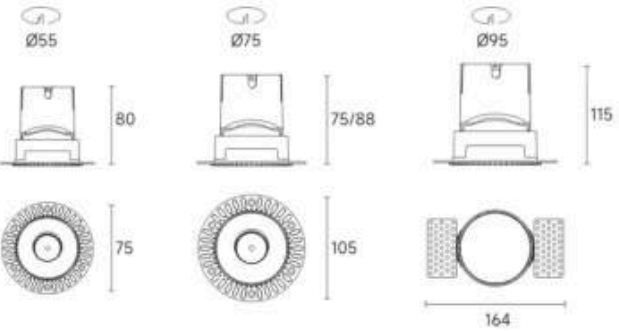

Photometric 光学角度

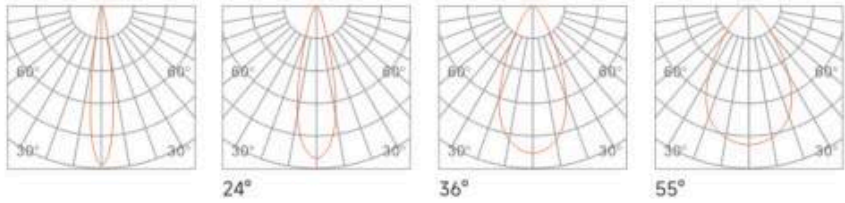

CLOVER SERIES 四叶草系列



Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
四叶草-55方形嵌入式	9W	COB	≥95	80lm/W	3000K 5000K 3500K 6000K 4000K
四叶草-75方形嵌入式-75	9W				
四叶草-75方形嵌入式-88	12W				

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installtion 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ● ● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm

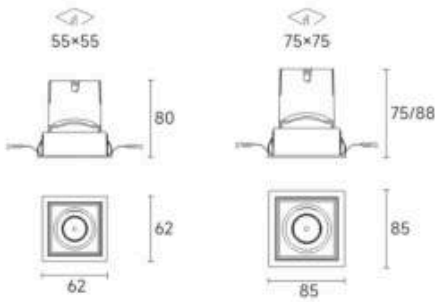

Photometric 光学角度

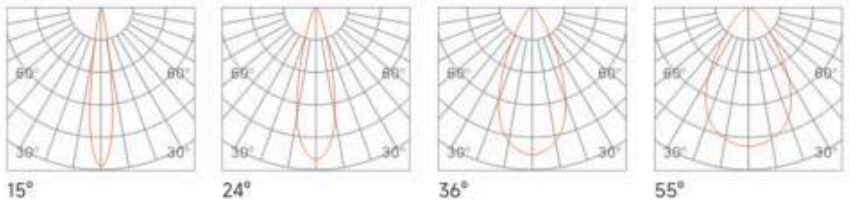

ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

Accessories 配件



CLOVER SERIES 四叶草系列



Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
四叶草-55方形无边框	9W	COB	≥95	80lm/W	3000K 5000K 3500K 6000K 4000K
四叶草-75方形无边框-75	9W				
四叶草-75方形无边框-88	12W				

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installtion 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ● ● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm

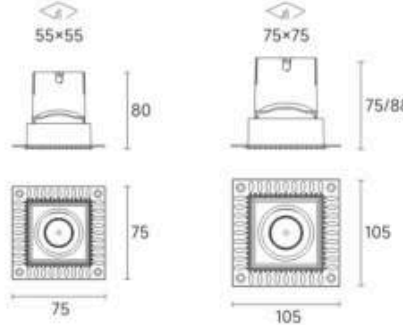

Photometric 光学角度

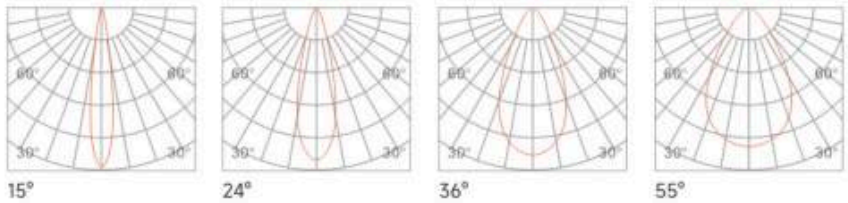

ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

Accessories 配件



CLOVER SERIES 四叶草系列



Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
四叶草-55双头嵌入式	2×9W	COB	≥95	80lm/W	3000K 5000K 3500K 6000K 4000K
四叶草-75双头嵌入式-75	2×9W				
四叶草-75双头嵌入式-88	2×12W				

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installation 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ● ● ●

Operating Temp 工作温度
-25°C ~ 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm

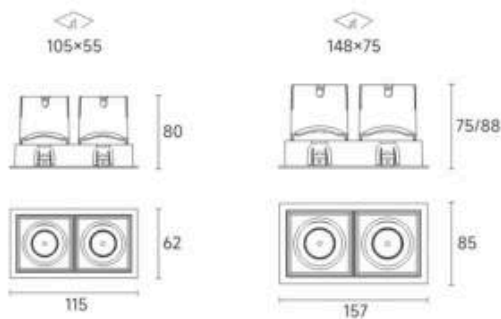

Photometric 光学角度

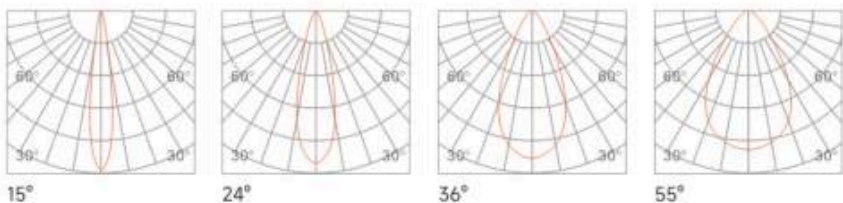

ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

Accessories 配件



CLOVER SERIES 四叶草系列



Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
四叶草-55双头无边框	2×9W	COB	≥95	80lm/W	3000K 5000K 3500K 6000K 4000K
四叶草-75双头无边框-75	2×9W				
四叶草-75双头无边框-88	2×12W				

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installation 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ● ● ●

Operating Temp 工作温度
-25°C ~ 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm

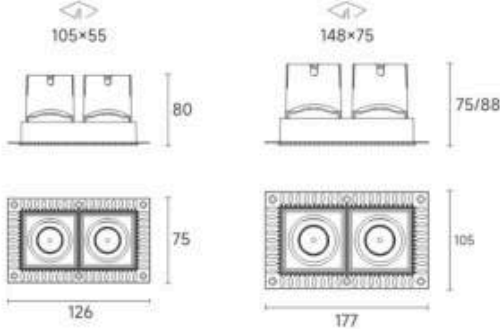

Photometric 光学角度

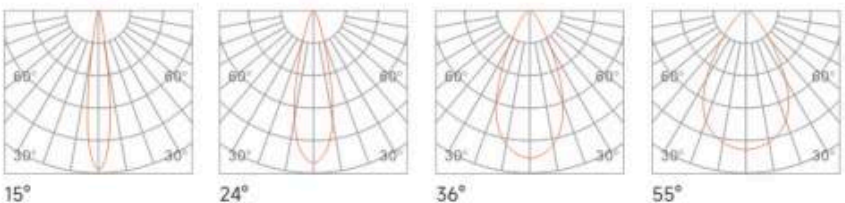


ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

Accessories 配件



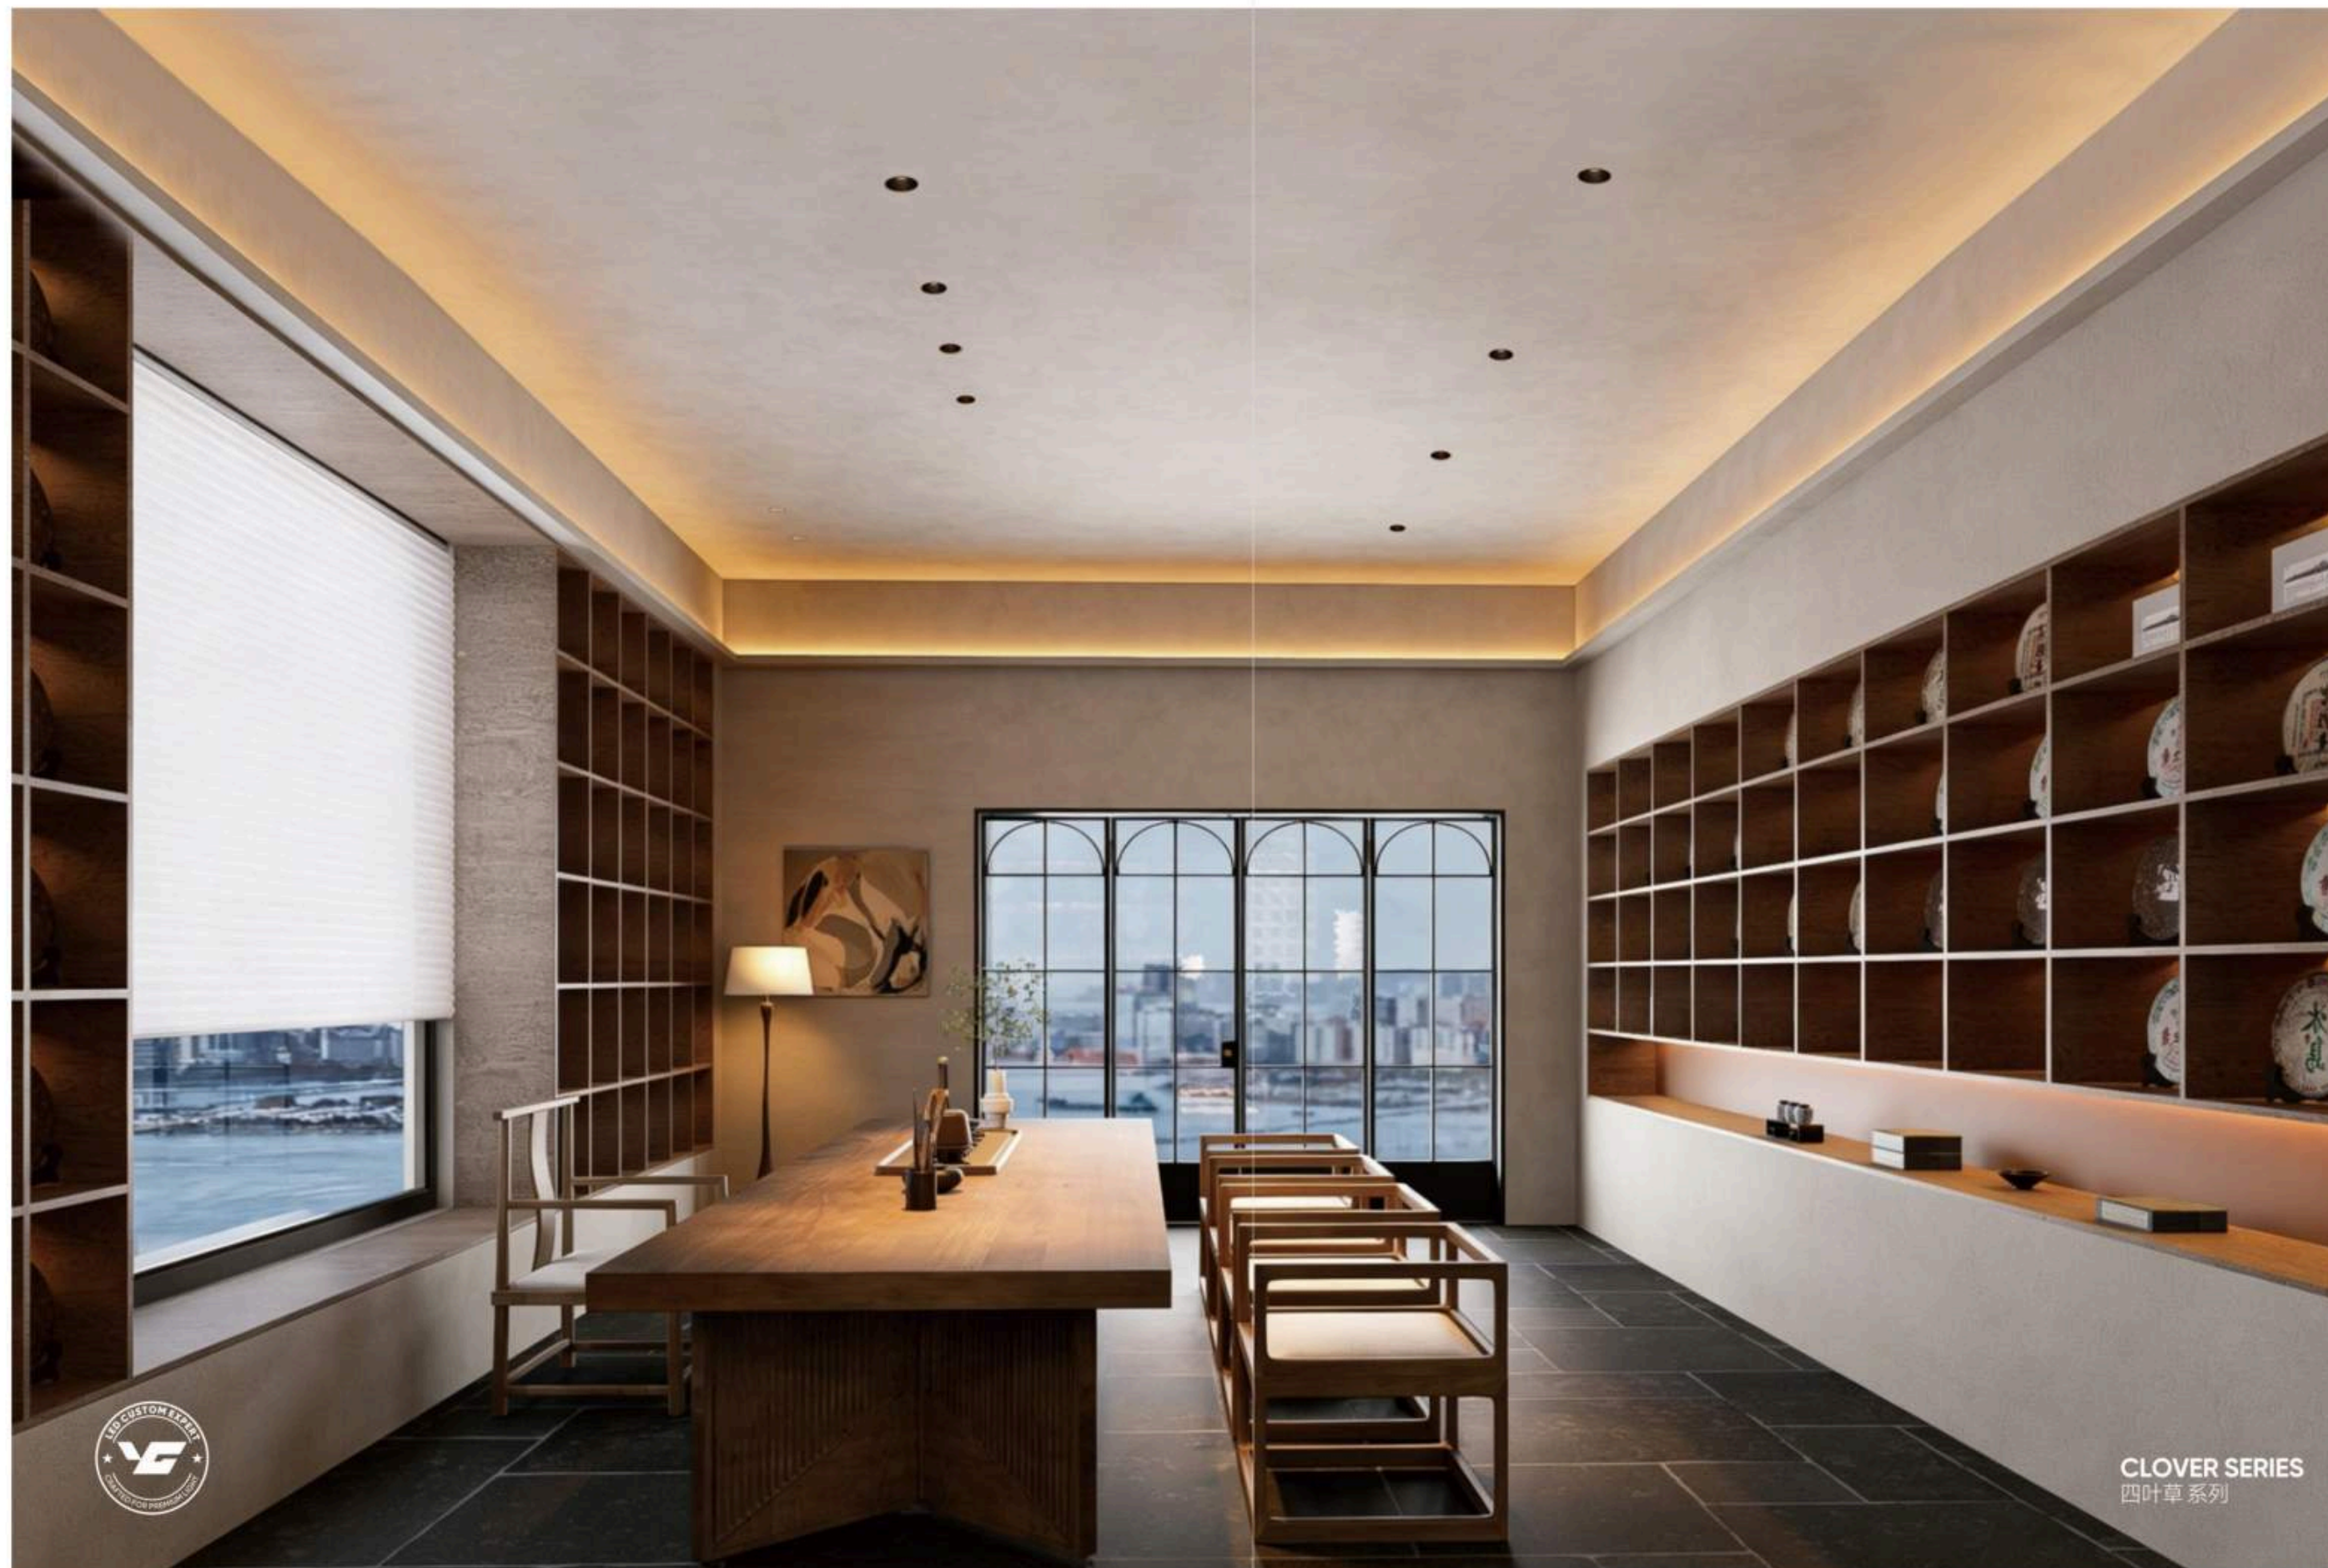

SHADOWE

5S

SERIES

SHADOWE SERIES 光影5S

家族化设计, 配件多样化, 满足不同的照明需求; 全方位灯光服务适用于别墅平层、商业餐厅、酒店、展馆等多种应用领域。

Familiarized design diversified accessories to meet different lighting needs; full range of lighting services. Suitable for villa flat, commercial restaurant, hotel, exhibition hall and other applications.



CONCEALED PULL TABS

隐藏式拉环设计

The lamp body is equipped with a special pull ring, gently pull, easy to remove. The light body is equipped with a special pull ring as standard, easy to take out the lamps and adjust the pendulum head, without hurting the ceiling and easier to maintain.

灯体标配专用拉环，轻轻一拉，轻松取出灯具，调整摆头，不伤天花更易维护。



COMPOUND CONVEX LENS

复合式凸透镜

Precise light control, light source deep hidden design, effectively prevent dazzling. Light through the lens, in the anti-glare cup filtered downward irradiation. The light from the lamp body is even and soft, presenting a perfect light spot, which can achieve a high standard of illumination. Uniform and soft, presenting a perfect spot, not only can achieve the high standard illumination effect, and at the same time, the light feeling comfort, reduce eye glare stimulation.

精准控光，光源深藏设计，有效防止炫光。光线经过透镜、在防眩杯滤后对下照射。灯体出光均匀柔和，呈现完美光斑，既能达到的高标准照亮效果，同时光感舒适度，减少眼部受到眩光刺激。



SPHERICAL ANTI-GLARE

球形遮光防眩设计

Deeply hidden light source design, spherical hood structure, double anti-glare, rounded light spot, large shading angle, high anti-glare index, giving people comfortable visual enjoyment.

深藏光源设计，球形遮光罩结构，双重防眩，光斑圆润，大遮光角，高防眩指数，给人带来舒适的视觉享受。




ANGLE ADJUSTMENT

灵活调角设计

Adjustable 30° in the vertical direction, 350° in the horizontal direction, large angle rotation, precise lighting, suitable for professional lighting debugging, clear and audible rhythm, turn the card shaft, and you can hear the sense of high-end.

垂直方向30°可调，水平350°可调，大角度旋转精准打光，适合专业的灯光调试，清晰有声节奏转动卡轴，听得到的高级感。

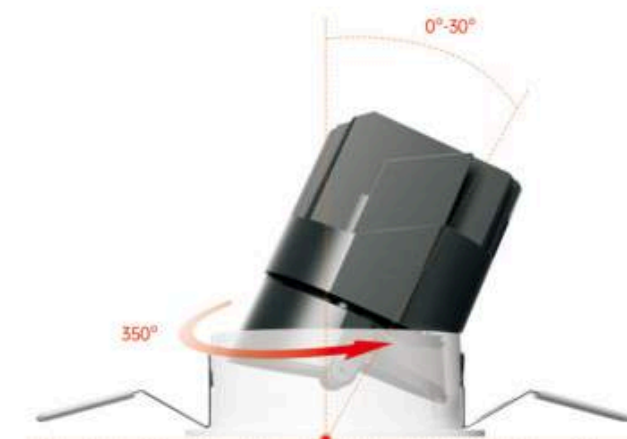



SHADOWE 5S SERIES
光影5S

5S SERIES

PC防眩杯款

多种高度尺寸与面环选择，满足更多的照明设计需求

PC anti-glare cup version

Multiple height dimensions and trim ring options are available to meet diverse lighting design requirements.




防眩杯颜色选择

Anti-glare cup color options



SHADOWE 5S SERIES



ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

Accessories 配件



Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
5S-55圆形嵌入式	9W	COB	≥95	80lm/W	3000K 5000K 3500K 6000K 4000K
5S-75圆形嵌入式-75	9W				
5S-75圆形嵌入式-88	12W				
5S-95圆形嵌入式	24W				

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installation 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ● ● ● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm

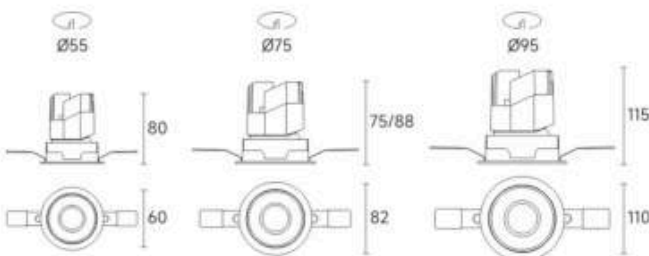

Photometric 光学角度

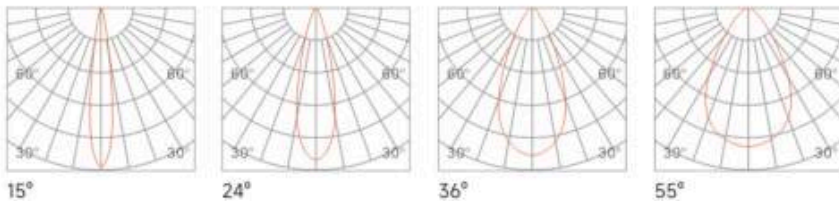

SHADOWE 5S SERIES



ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

Accessories 配件



Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
5S-55圆形无边框	9W	COB	≥95	80lm/W	3000K 5000K 3500K 6000K 4000K
5S-75圆形无边框-75	9W				
5S-75圆形无边框-88	12W				
5S-95圆形无边框	24W				

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installation 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ● ● ● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm

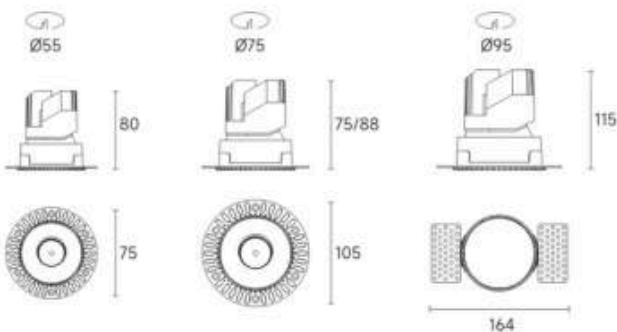

Photometric 光学角度

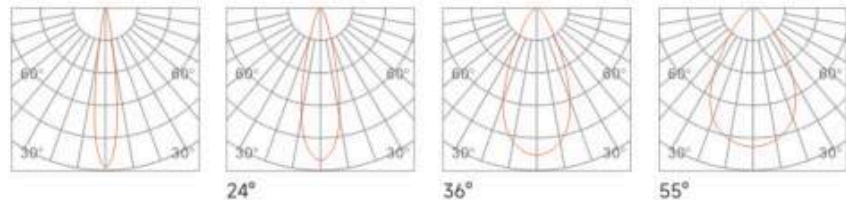

SHADOWE 5S SERIES



Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
5S-55方形嵌入式	9W	COB	≥95	80lm/W	3000K 5000K 3500K 6000K 4000K
5S-75方形嵌入式-75	9W				
5S-75方形嵌入式-88	12W				

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installtion 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ● ● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm



Photometric 光学角度

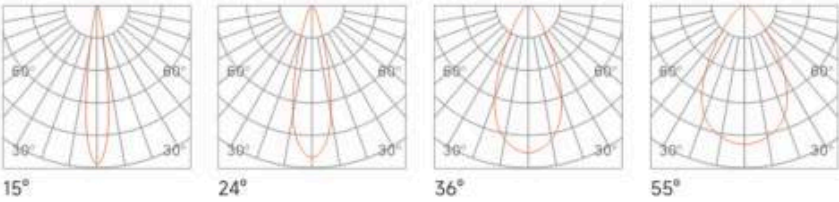

ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

Accessories 配件



SHADOWE 5S SERIES



Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
5S-55方形无边框	9W	COB	≥95	80lm/W	3000K 5000K 3500K 6000K 4000K
5S-75方形无边框-75	9W				
5S-75方形无边框-88	12W				

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installtion 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ● ● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm

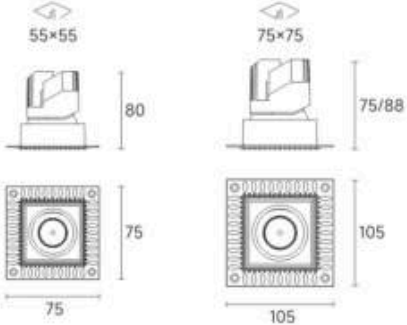

Photometric 光学角度

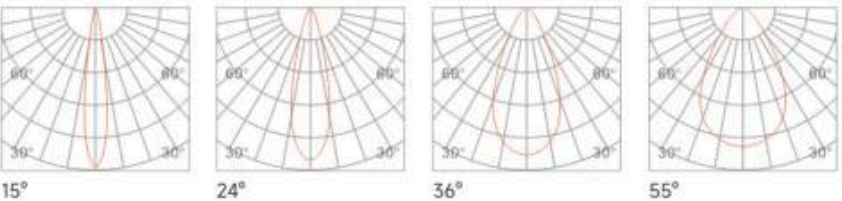

ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

Accessories 配件



SHADOWE 5S SERIES

哑黑
matte black枪黑
gun black哑白
matte white亮银
bright silver

Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
5S-55双头嵌入式	2×9W	COB	≥95	80lm/W	● 3000K ○ 5000K ● 3500K ○ 6000K ○ 4000K
5S-75双头嵌入式-75	2×9W				
5S-75双头嵌入式-88	2×12W				

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installation 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ● ● ● ●

Operating Temp 工作温度
-25°C ~ 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm

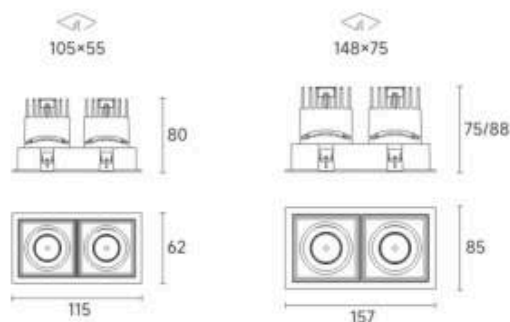

Photometric 光学角度

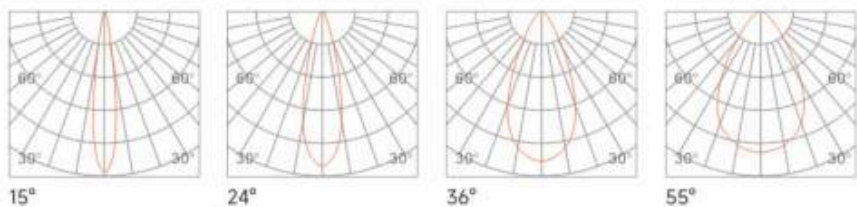

ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

Accessories 配件

Clear	Softening Lens	Honeycomb Louver

SHADOWE 5S SERIES

哑黑
matte black枪黑
gun black哑白
matte white亮银
bright silver

Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
5S-55双头无边框	2×9W	COB	≥95	80lm/W	● 3000K ○ 5000K ● 3500K ○ 6000K ○ 4000K
5S-75双头无边框-75	2×9W				
5S-75双头无边框-88	2×12W				

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installation 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ● ● ● ●

Operating Temp 工作温度
-25°C ~ 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm

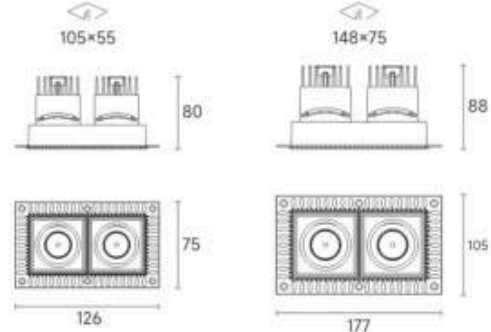

Photometric 光学角度

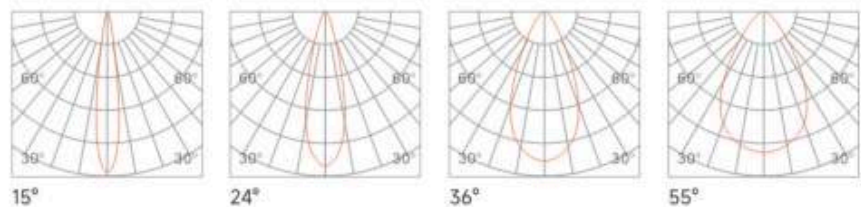


ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

Accessories 配件

Clear	Softening Lens	Honeycomb Louver

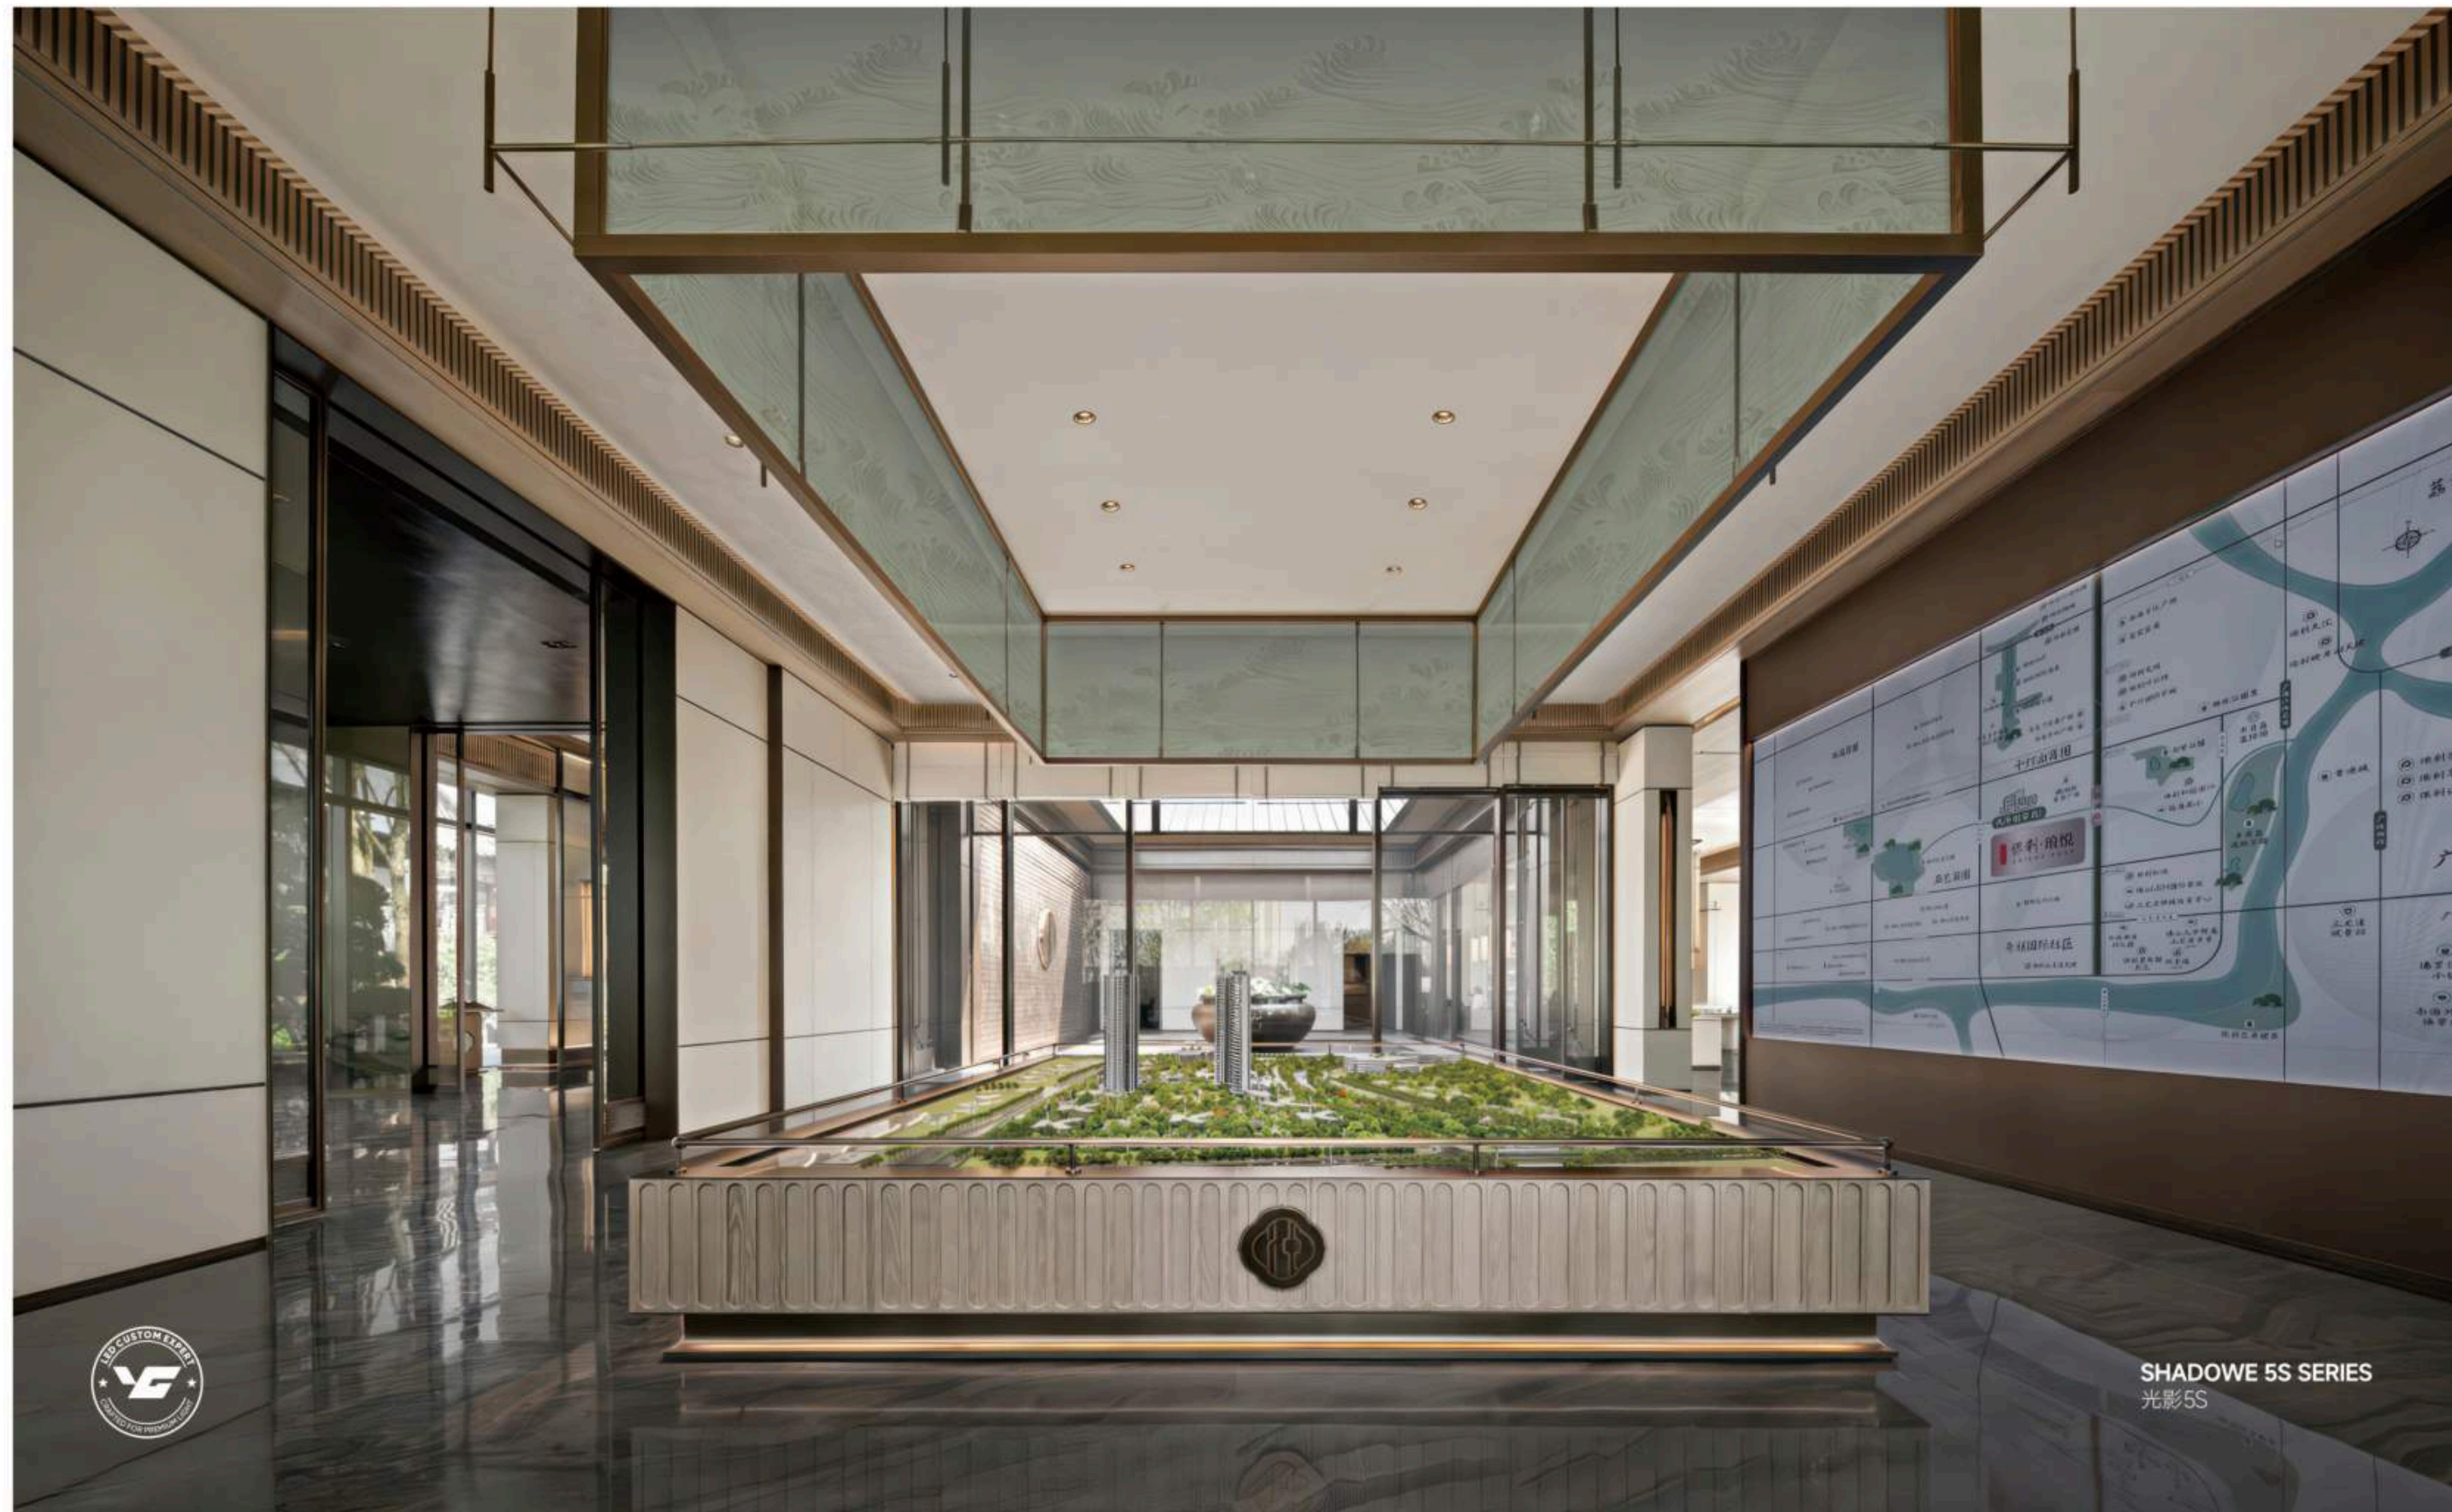

SHADOWE 5S SERIES
光影5S

6S SERIES

涵盖 35mm-95mm 全规格开孔尺寸，搭载大口径光学透镜，出光效率优异。

搭配高性能散热器，散热稳定高效，实现功率升级。

兼顾实用与品质，全面适配各类商用及家装大小空间品质照明需求。

Covering a full range of hole sizes from 35mm to 95mm, equipped with large aperture optical lenses, with excellent light output efficiency.

Paired with high-performance heat sinks, the heat dissipation is stable and efficient, achieving power upgrades.

Balancing practicality and quality, fully adapting to various commercial and home decoration space quality lighting needs.


SHADOWE
6S
SERIES



PROFESSIONAL LIGHTING PRODUCT DESIGN

Ø75开孔三种高度设计，灵活适应不同层高空间照明需求

Ø75 cutout size, three height designs
flexibly meeting lighting needs of spaces with different floor heights.

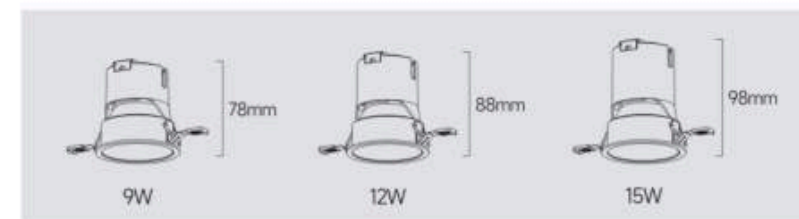

SIMPLE DETACHABLE STRUCTURE DESIGN 简易拆卸结构设计




CREATIVE LOCKING DESIGN

创意锁止设计

可调角与固定模式随意切换
轻松满足不同照明场景需求

The adjustable Angle and fixed mode can be switched freely
Easily meet the needs of different lighting scenarios




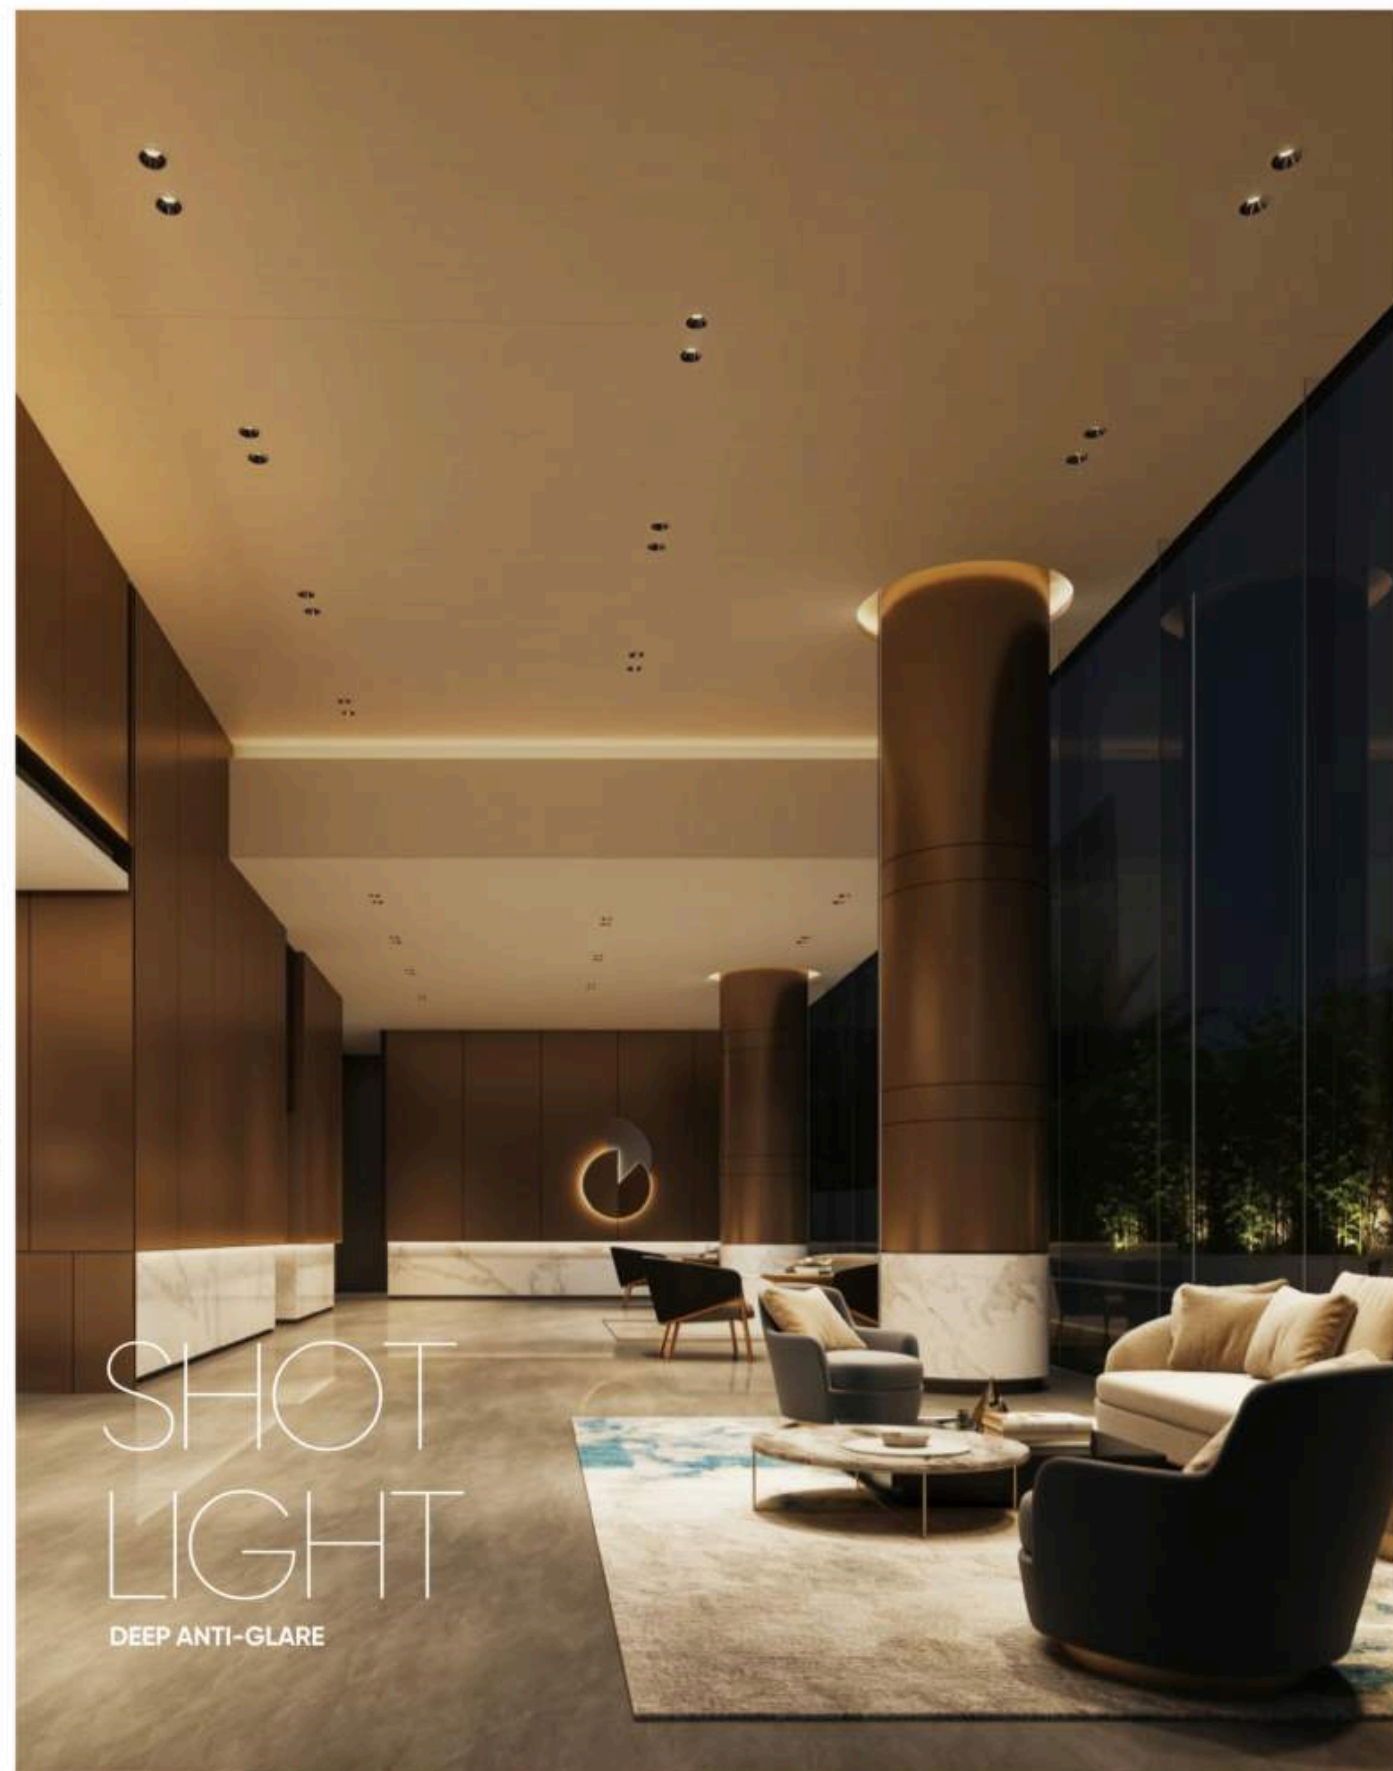


SHOT
LIGHT
DEEP ANTI-GLARE

ADJUSTABLE

▶ 垂直方向0-30°照射角度可调
The vertical irradiation angle is adjustable from 0° to 30°.

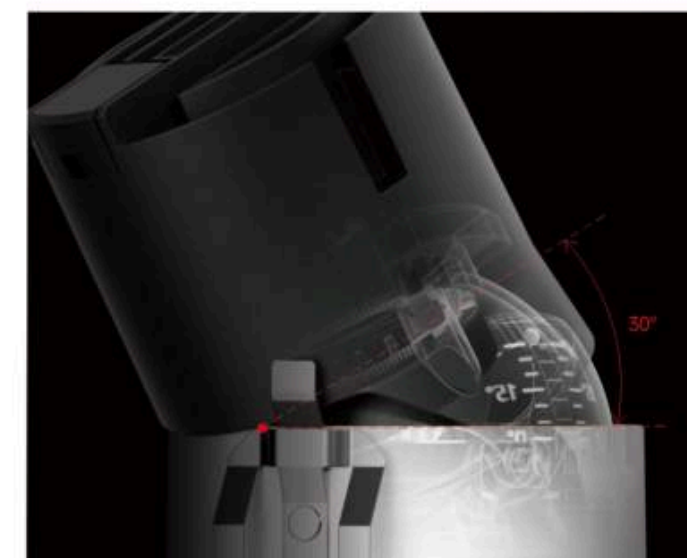

▶ 水平方向360°旋转角度可调
Horizontal rotation angle adjustable at 360°

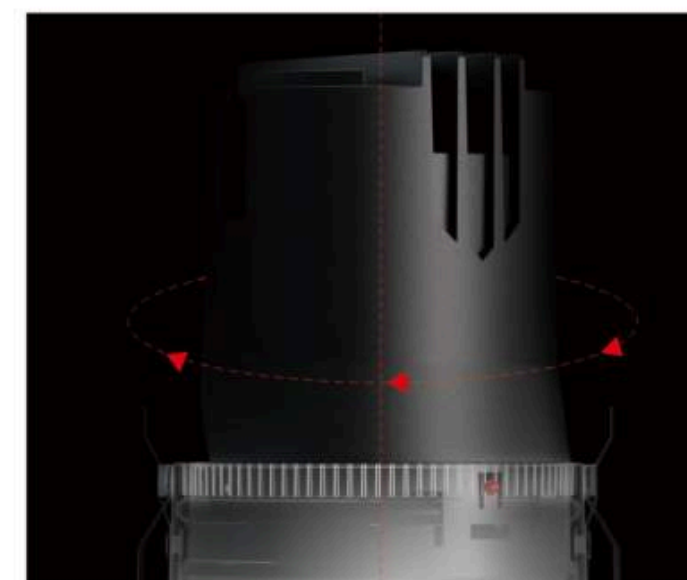



HIDDEN PULL RING DESIGN FOR EASY LAMP REMOVAL

隐藏式拉环设计，轻松取下灯体



ANTI-LIGHT LEAKAGE DESIGN

防漏光设计，出光效率高

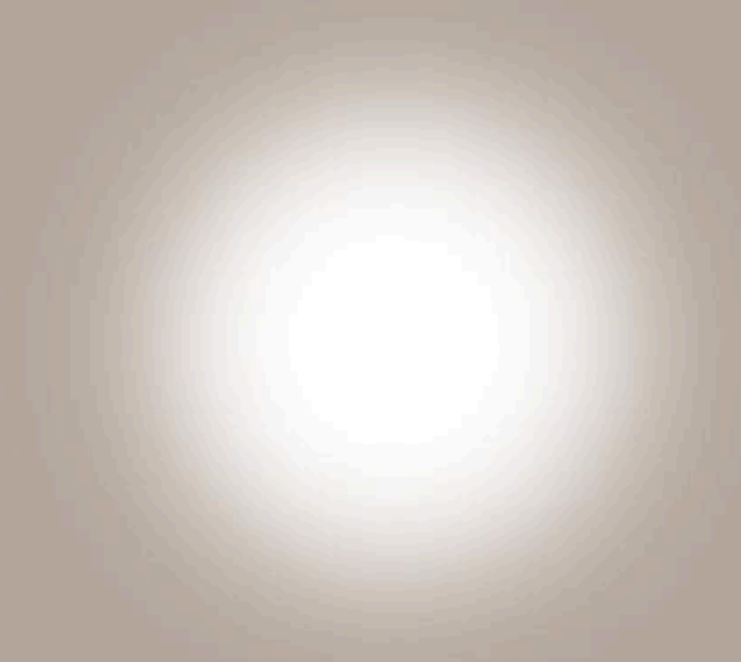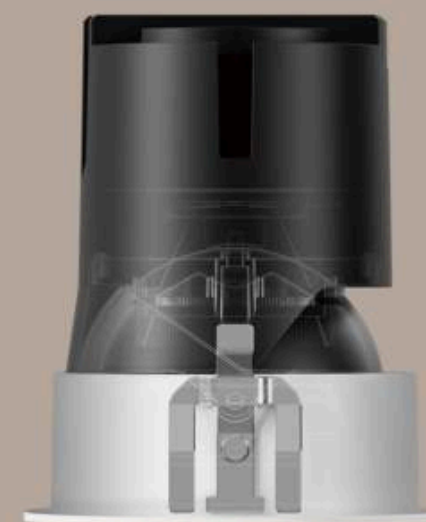

6S SERIES

全金属款

一体金属杯身，简约更显高级


All metal version

One piece metal cup body, simple yet sophisticated.



多种金属面环与防眩杯选择

Multiple metal face rings and anti glare cup options.

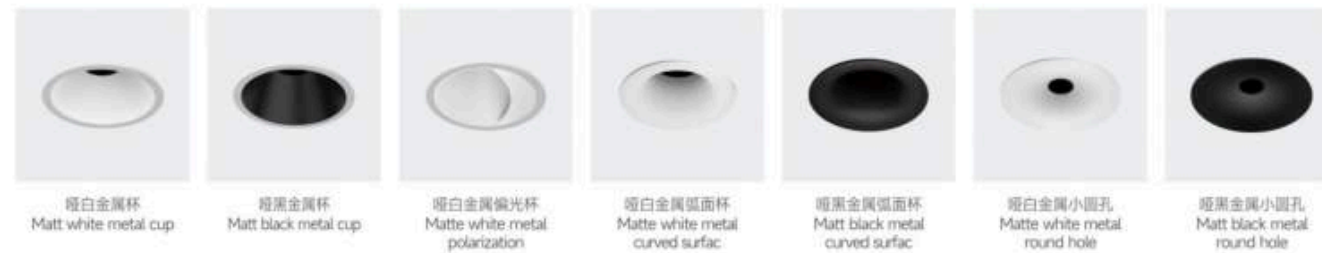


6S SERIES

PC防眩杯款

多种高度尺寸与面环选择，满足更多的照明设计需求

PC anti-glare cup version

Multiple height dimensions and trim ring options are available to meet diverse lighting design requirements.

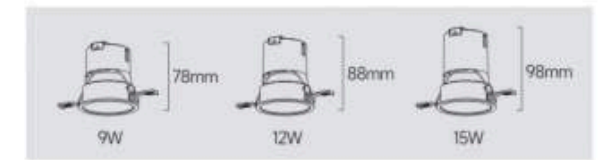

防眩杯颜色选择

Anti-glare cup color options.





SHADOWE 6S SERIES
光影 6S

SHADOWE 6S SERIES



ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

Accessories 配件

Clear	Softening Lens	Honeycomb Louver

Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
6S-55圆形嵌入式	9W	COB	≥95	80lm/W	● 3000K ○ 5000K ● 3500K ○ 6000K ● 4000K

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installation 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ● ● ● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm

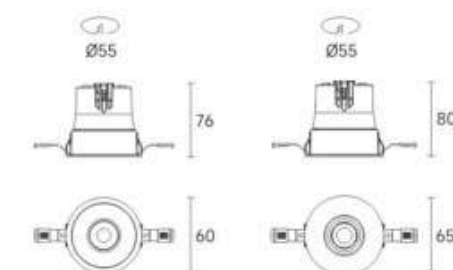

Photometric 光学角度

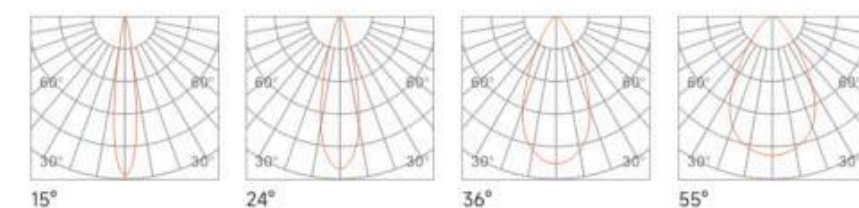

SHADOWE 6S SERIES



Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
6S-55圆形嵌入式	9W	COB	≥95	80lm/W	3000K 5000K 3500K 6000K 4000K

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installation 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ● ● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm



Photometric 光学角度

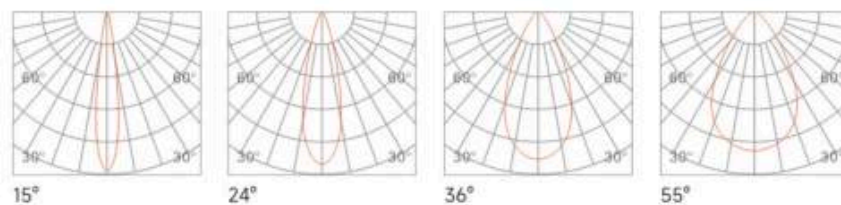

Accessories 配件



※ Compatible with 5S and 6S series face rings.
可以通用5S、6S系列面环

ORTIONS


1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

无主灯
全球高端定制服务商
OEM/ODM
以匠心 致好光

LIGHTING PRODUCTS
WORLDWIDE PREMIUM
CUSTOM SERVICE



SHADOWE 6S SERIES



Integrated metal anti-glare cup
一体金属防眩杯



ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
6S-55圆形嵌入式	9W	COB	≥95	80lm/W	3000K 5000K 3500K 6000K 4000K
6S-75圆形嵌入式	12W				
6S-55弧面嵌入式	9W				
6S-75弧面嵌入式	12W				

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installation 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm

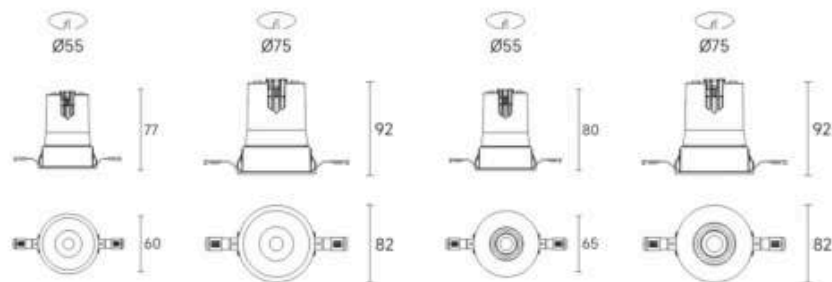

Photometric 光学角度

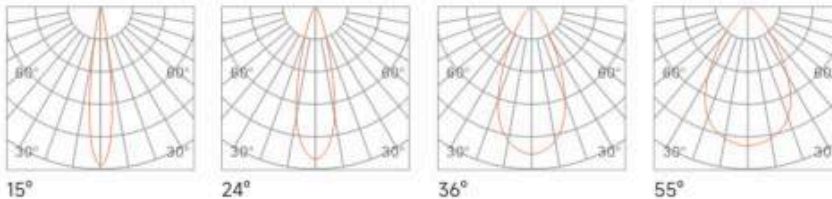

SHADOWE 6S SERIES



Integrated metal anti-glare cup
一体金属防眩杯



ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

※ Small-aperture light-emitting design, only supports 24° and 36° beam angle configurations.
小圆孔出光款式，只支持 24°、36° 光束角配置

Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
6S-55弧面嵌入式	9W	COB	≥95	80lm/W	3000K 5000K 3500K 6000K 4000K
6S-75弧面嵌入式	12W				
6S-55小圆孔嵌入式	7W				
6S-75小圆孔嵌入式	9W				

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installation 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm

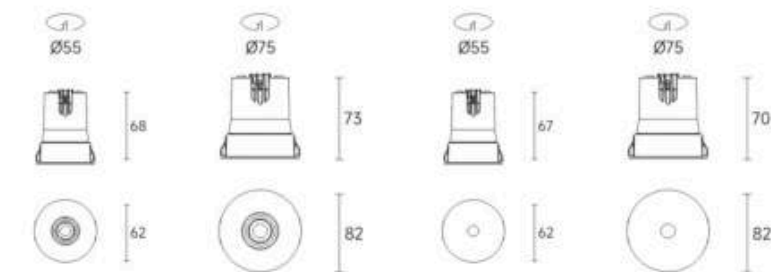

Photometric 光学角度

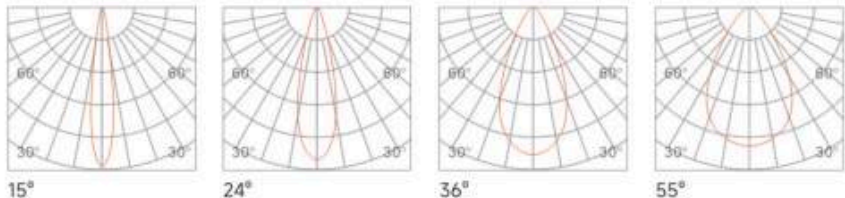

美容光=轮廓光+柔和补光
Beauty light = rim light + soft fill light

YOUGU

YOUGU

SHADOWE 6S SERIES



RECESSED SPOTLIGHT



SHADOWE 6S SERIES



Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
6S-75美颜灯嵌入式	12W	COB	≥95	80lm/W	● 3000K ○ 5000K ● 3500K ○ 6000K
6S-75美颜灯无边框					○ 4000K

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installation 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤9




Dimension 尺寸
unit:mm

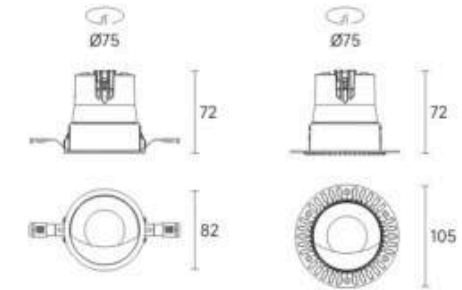

Photometric 光学角度



朝向镜子35°
朝向人15°

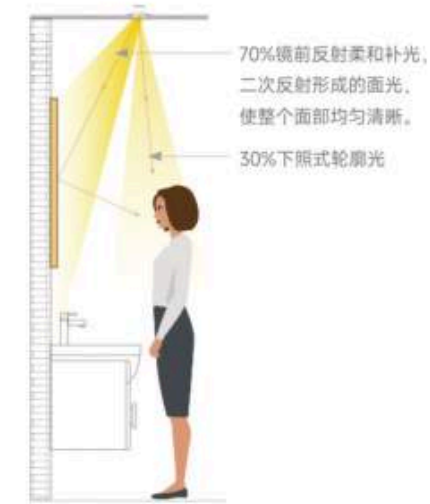

经过镜子反射补光, 有效消除脸部阴影, 柔化面容。



越靠近镜子, 脸部光线越明亮。

SHADOWE 6S SERIES



Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
6S-75圆形嵌入式-76	9W	COB	≥95	80lm/W	3000K 5000K 3500K 6000K 4000K
6S-75圆形嵌入式-88	12W				
6S-75圆形嵌入式-98	15W				
6S-95圆形嵌入式	24W				

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installation 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ● ● ● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm

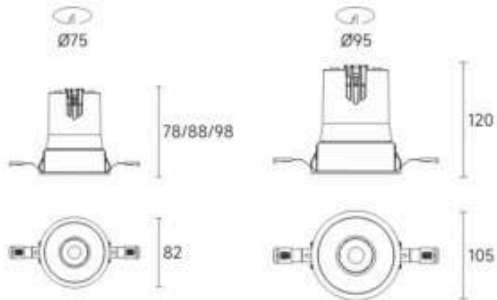

Photometric 光学角度

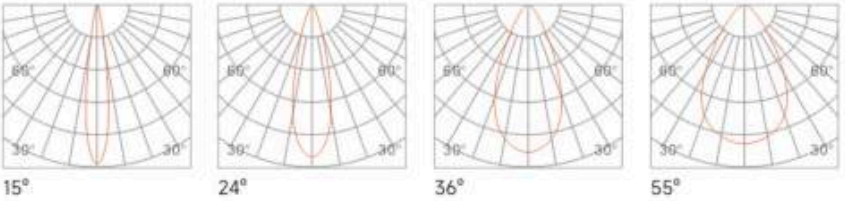

ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

Accessories 配件



SHADOWE 6S SERIES



Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
6S-75圆形无边框-76	9W	COB	≥95	80lm/W	3000K 5000K 3500K 6000K 4000K
6S-75圆形无边框-88	12W				
6S-75圆形无边框-98	15W				
6S-95圆形无边框	24W				

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installation 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ● ● ● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm

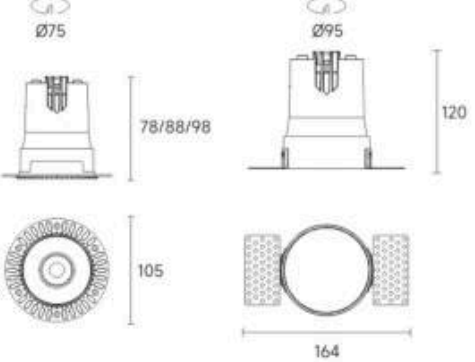

Photometric 光学角度

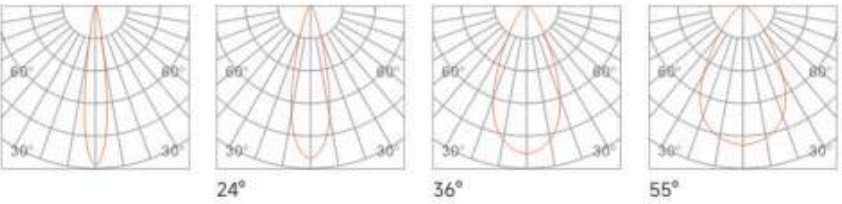

ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

Accessories 配件



SHADOWE 6S SERIES



Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
6S-55方形嵌入式	9W	COB	≥95	80lm/W	3000K 5000K 3500K 6000K 4000K
6S-75方形嵌入式-78	9W				
6S-75方形嵌入式-88	12W				
6S-75方形嵌入式-98	15W				

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installation 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ● ● ● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm

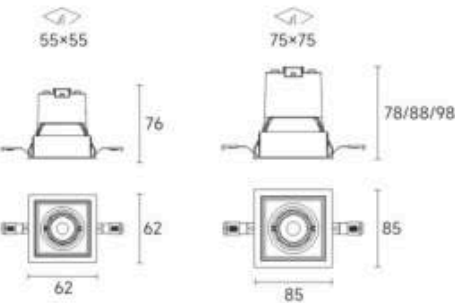

Photometric 光学角度

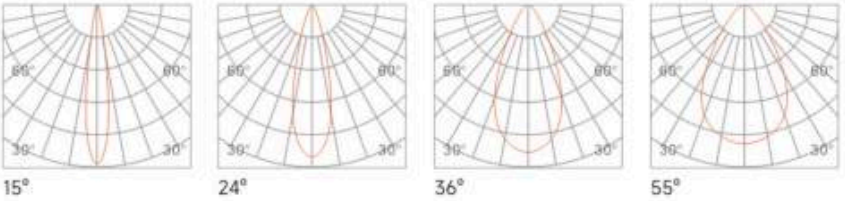

ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

Accessories 配件



SHADOWE 6S SERIES



Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
6S-55方形无边框	9W	COB	≥95	80lm/W	3000K 5000K 3500K 6000K 4000K
6S-75方形无边框-78	9W				
6S-75方形无边框-88	12W				
6S-75方形无边框-98	15W				

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installation 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ● ● ● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm

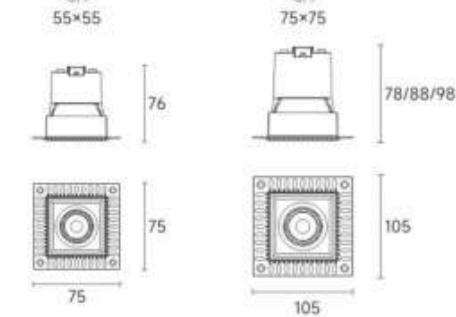

Photometric 光学角度

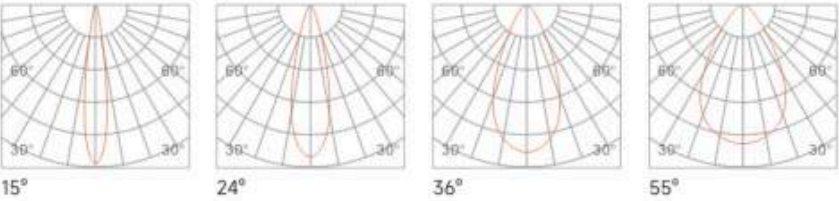

ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

Accessories 配件



SHADOWE 6S SERIES

哑黑
matte black枪黑
gun black哑白
matte white亮银
bright silver

Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
6S-55双头嵌入式	2×9W	COB	≥95	80lm/W	● 3000K ○ 5000K ● 3500K ○ 6000K ● 4000K
6S-75双头嵌入式-78	2×9W				
6S-75双头嵌入式-88	2×12W				
6S-75双头嵌入式-98	2×15W				

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installation 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ● ● ● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm

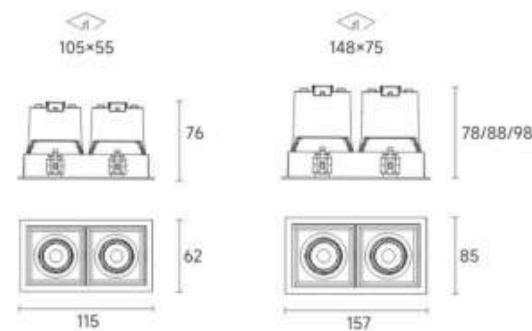

Photometric 光学角度

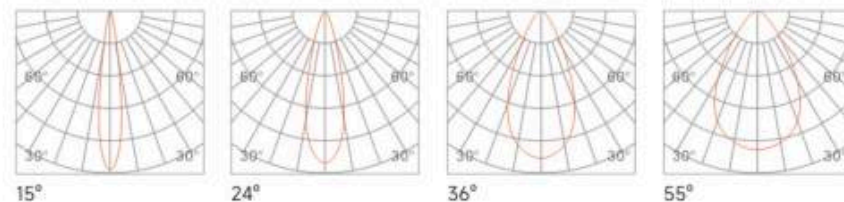

ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

Accessories 配件

Clear	Softening Lens	Honeycomb Louver

SHADOWE 6S SERIES

哑黑
matte black枪黑
gun black哑白
matte white亮银
bright silver

Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
6S-55双头无边框	2×9W	COB	≥95	80lm/W	● 3000K ○ 5000K ● 3500K ○ 6000K ● 4000K
6S-75双头无边框-78	2×9W				
6S-75双头无边框-88	2×12W				
6S-75双头无边框-98	2×15W				

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installation 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ● ● ● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm

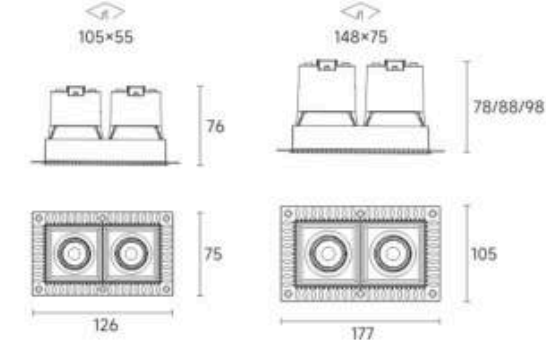

Photometric 光学角度

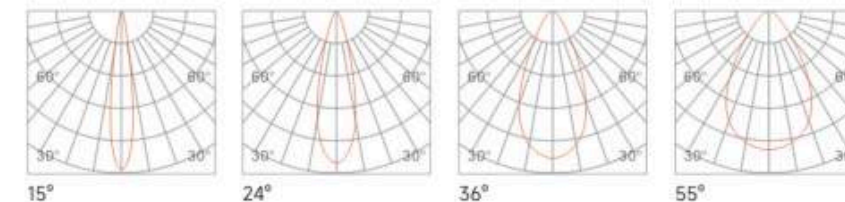

ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

Accessories 配件

Clear	Softening Lens	Honeycomb Louver

SHOT LIGHT

NOW Ø75 15W 24°



STARRY SKY SERIES 星空系列

金属拉丝质感灯体，外观精致高级，彰显细腻工艺。
采用免工具拆装结构，可快速更换不同光束角透镜，
灵活适配多样化照明场景用光需求。

Brushed metal textured lamp body with an exquisite high-end look, showcasing refined craftsmanship.
Adopting a tool-free disassembly structure, lenses of different beam angles can be replaced quickly to
flexibly meet the lighting demands of diverse application scenarios.

STARRY SKY



星空系列


**EXQUISITE METAL
BRUSHED TEXTURE**

精致金属拉丝质感



BRUSHED METAL

100%
拉丝质感，颜值出众

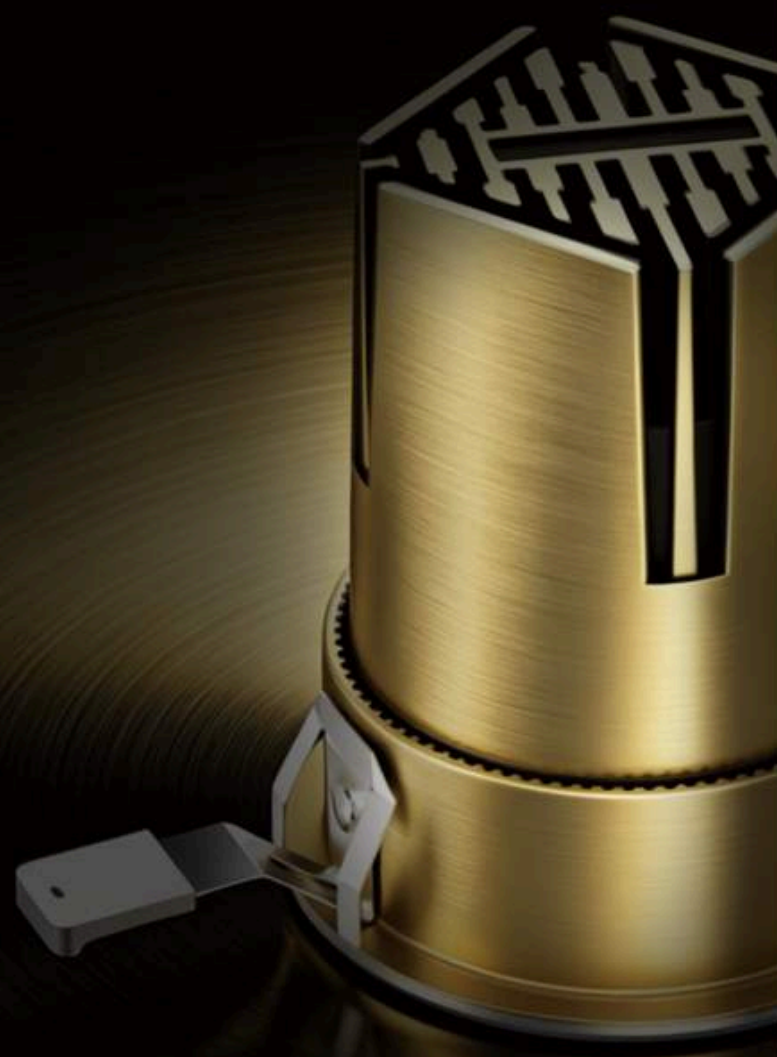


STARRY SKY SERIES
星空系列



TOOL-FREE REMOVABLE & REPLACEABLE LENS

免工具拆装更换透镜

逆时针旋转胶圈可拆卸，更换不同光束角透镜
Rotate the rubber ring counterclockwise to detach,
then replace with lenses of different beam angles.

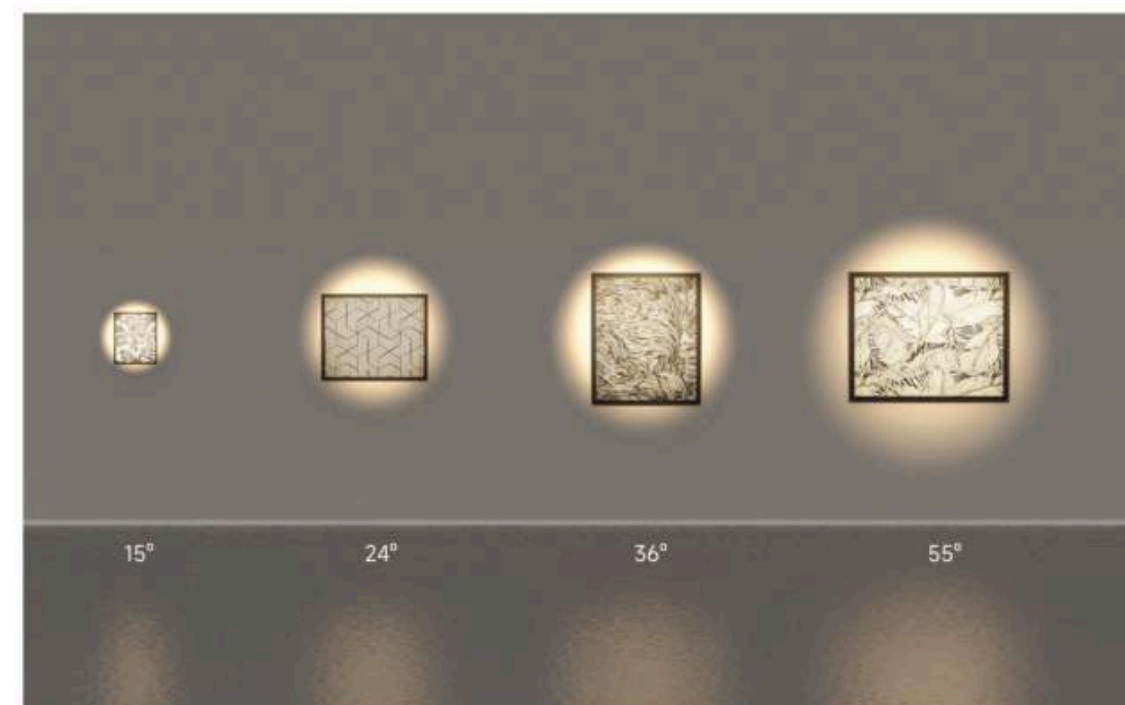

听音调节，灵巧变动，
垂直方向0-30°照射角度可调

Hearing adjustment, dexterity change.
0-35° vertical adjustment

一个滴答声

5°

内腔刻度设计，调角更精确
Inner cavity scale design for more
precise angle adjustment.



内腔调角定位设计，调角更省力
Inner cavity angle positioning design,
effortless angle adjustment.



EXQUISITE DESIGN



STARRY SKY SERIES

星空系列

全金属款

一体金属杯身，简约更显高级


All metal version

One piece metal cup body, simple yet sophisticated



多种金属面环与防眩杯选择

Multiple metal face rings and anti glare cup options

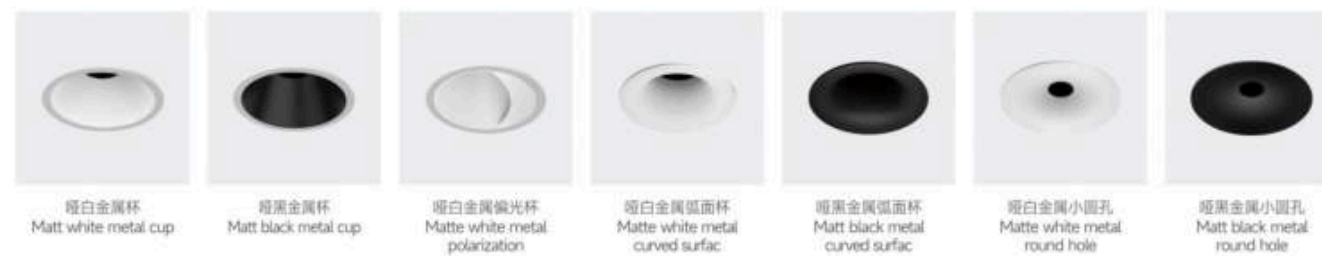

STARRY SKY SERIES

星空系列

PC防眩杯款

多种高度尺寸与面环选择，满足更多的照明设计需求

PC anti-glare cup version

Multiple height dimensions and trim ring options are available to meet diverse lighting design requirements.



防眩杯颜色选择

Anti-glare cup color options



STARRY SKY SERIES 星空系列



Integrated metal anti-glare cup
一体金属防眩杯



Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
星空-55圆形嵌入式	9W	COB	≥95	80lm/W	● 3000K ○ 5000K ● 3500K ○ 6000K ○ 4000K
星空-75圆形嵌入式	12W				
星空-55弧面嵌入式	9W				
星空-75弧面嵌入式	12W				

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installation 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm

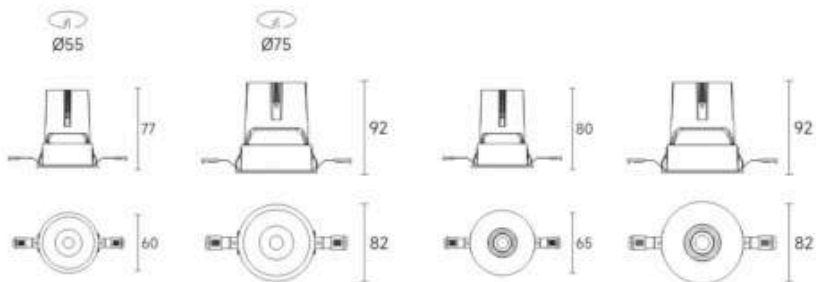

Photometric 光学角度

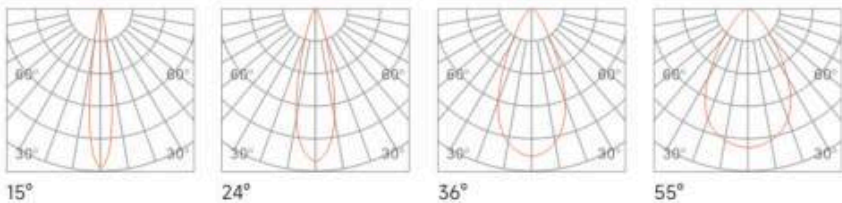

ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

STARRY SKY SERIES 星空系列



Integrated metal anti-glare cup
一体金属防眩杯



Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
星空-55弧面嵌入式	9W	COB	≥95	80lm/W	● 3000K ○ 5000K ● 3500K ○ 6000K ○ 4000K
星空-75弧面嵌入式	12W				
星空-55小圆孔嵌入式	7W				
星空-75小圆孔嵌入式	9W				

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installation 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm

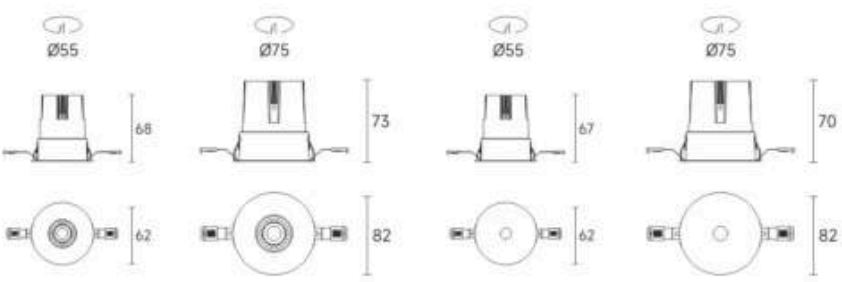

Photometric 光学角度

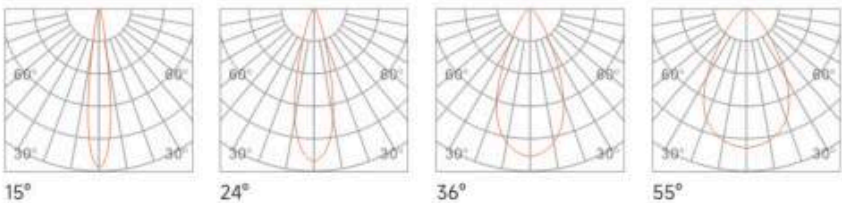

ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE


※ Small-aperture light-emitting design, only supports 24° and 36° beam angle configurations.
小圆孔出光款式，只支持 24°、36° 光束角配置



美容光=轮廓光+柔和补光
Beauty light = rim light + soft fill light

镜前美颜灯
Mirror makeup beauty light

STARRY SKY SERIES 星空系列

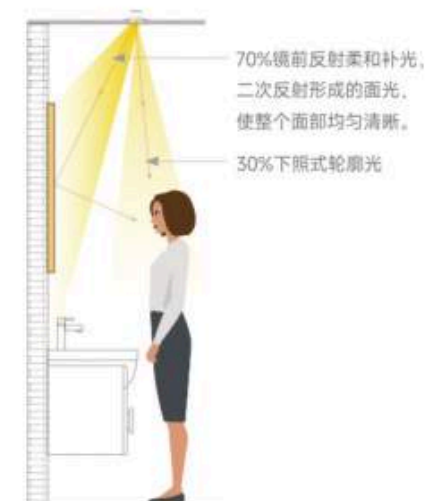

经过镜子反射补光, 有效消除脸部阴影, 柔化面容。



越靠近镜子, 脸部光线越明亮。

Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
星空-75美颜灯嵌入式	12W	COB	≥95	80lm/W	● 3000K ○ 5000K ● 3500K ○ 6000K
星空-75美颜灯无边框					● 4000K

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installation 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm

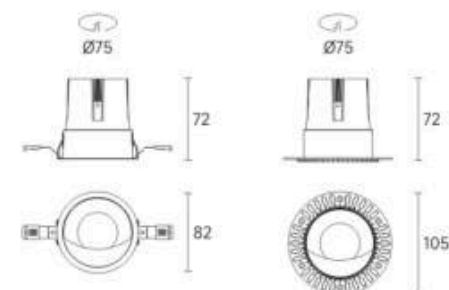

Photometric 光学角度



朝向镜子35°
朝向人15°

STARRY SKY SERIES 星空系列



Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
星空-55圆形嵌入式	9W	COB	≥95	80lm/W	● 3000K ○ 5000K ● 3500K ○ 6000K
星空-75圆形嵌入式	12W				○ 4000K

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installation 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ● ● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm

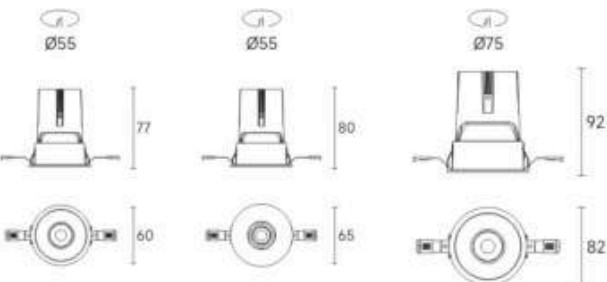

Photometric 光学角度

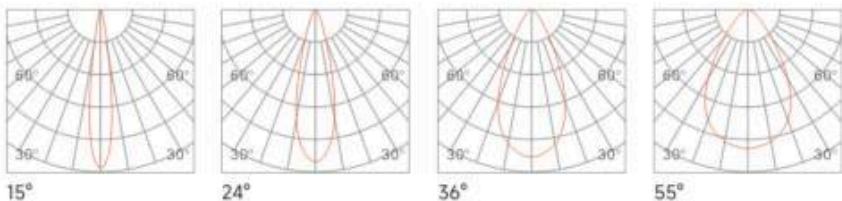

Accessories 配件



ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

STARRY SKY SERIES 星空系列



Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
星空-55圆形无边框	9W	COB	≥95	80lm/W	● 3000K ○ 5000K ● 3500K ○ 6000K
星空-75圆形无边框	12W				○ 4000K

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installation 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ● ● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm



Photometric 光学角度

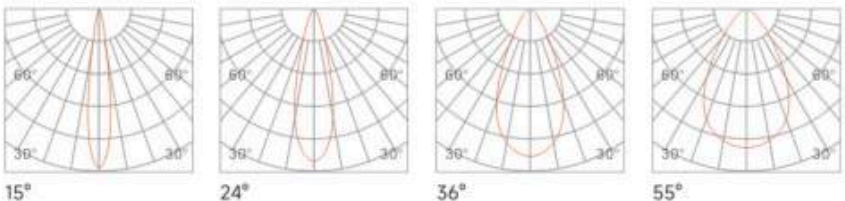

Accessories 配件



ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

STARRY SKY SERIES 星空系列



Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
星空-55方形嵌入式	9W	COB	≥95	80lm/W	● 3000K ○ 5000K ● 3500K ● 6000K
星空-75方形嵌入式	12W				○ 4000K

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installtion 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ● ● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm

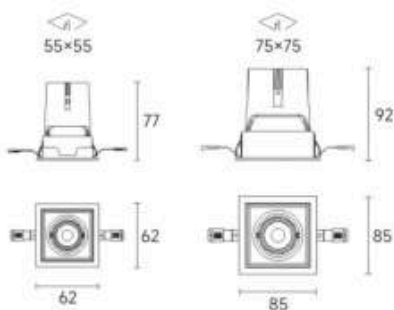

Photometric 光学角度

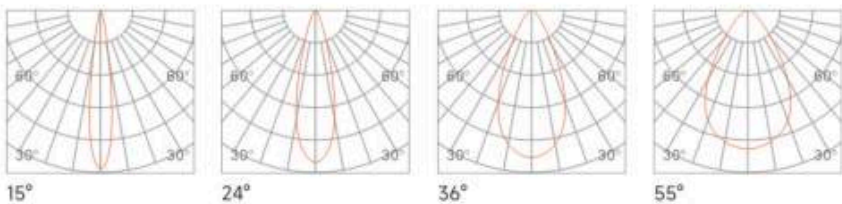

ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

Accessories 配件



STARRY SKY SERIES 星空系列



Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
星空-55方形无边框	9W	COB	≥95	80lm/W	● 3000K ○ 5000K ● 3500K ● 6000K
星空-75方形无边框	12W				○ 4000K

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installtion 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ● ● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm



Photometric 光学角度

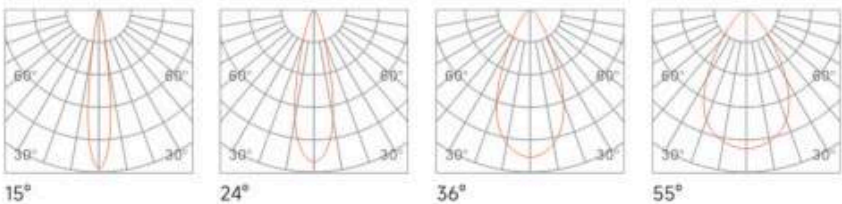

ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

Accessories 配件



STARRY SKY SERIES 星空系列



Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
星空-55双头嵌入式	2×9W	COB	≥95	80lm/W	● 3000K ○ 5000K ● 3500K ○ 6000K
星空-75双头嵌入式	2×12W				○ 4000K

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installtion 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ● ● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm

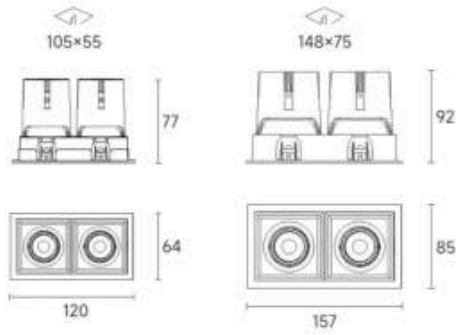

Photometric 光学角度

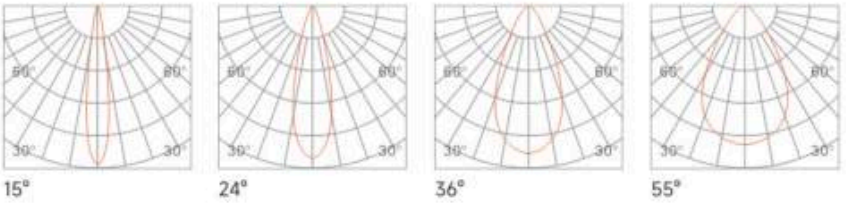

ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

Accessories 配件



STARRY SKY SERIES 星空系列



Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
星空-55双头无边框	2×9W	COB	≥95	80lm/W	● 3000K ○ 5000K ● 3500K ○ 6000K
星空-75双头无边框	2×12W				○ 4000K

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installtion 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ● ● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm

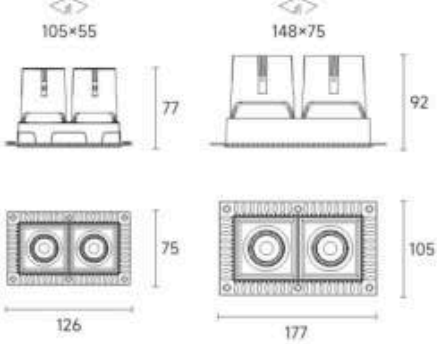

Photometric 光学角度

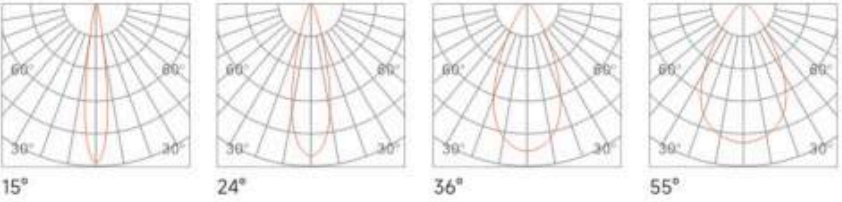

ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

Accessories 配件



STARRY SKY SERIES
星空系列

STARRY SKY SERIES

RECESSED SPOTLIGHT



SMALL SIZE

HIGH POWER

P7

SERIES

P7系列射灯，小开孔进发大功率，深藏光源结构，深度防眩柔光不刺眼。
冷锻工艺打造灯体，散热性能出众，运作稳定不易积热。
颜值与实用性兼备，小户型也能营造匀称高级光影。

P7 series spotlights adopt small aperture with high power.
Built-in deep light source realizes effective anti-glare effect.
Cold-forged lamp body features outstanding heat dissipation for stable long service.
Stylish and practical, it creates exquisite uniform light in narrow spaces.

P7 SERIES
SMALL SIZE
HIGH POWER
小开孔 大功率



30%↑

**SUPERIOR COOLING
PERFORMANCE**

冷锻精工质感，散热更出色

COLD
FORGING
PROCESS



P7 SERIES

DEEP

Hidden light source anti-glare



P7 SERIES

全金属款

一体金属杯身，简约更显高级

All metal version

One piece metal cup body, simple yet sophisticated



多种金属面环与防眩杯选择

Multiple metal face rings and anti glare cup options



* The 35mm cutout version does not support a 50° beam angle configuration.
35mm开孔款式，不支持 50° 光束角配置



SMALL SIZE HIGH POWER

小开孔 大功率

P7 SERIES

RECESSED SPOTLIGHT

P7 SERIES

P7 SERIES



Integrated metal anti-glare cup
一体金属防眩杯



哑白 white



哑黑 white+black



全黑 black

Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
P7-35圆形嵌入式	7W	COB	≥95	80lm/W	● 3000K ○ 5000K ● 3500K ○ 6000K ● 4000K
P7-45圆形嵌入式	9W				
P7-55圆形嵌入式	12W				

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installation 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm

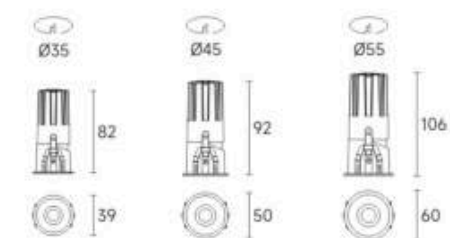

Photometric 光学角度

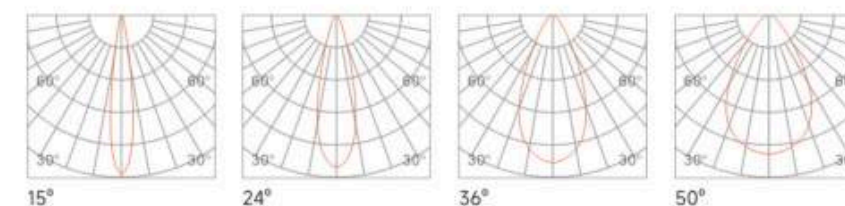

※ The 35mm cutout version does not support a 50° beam angle configuration.
35mm开孔款式，不支持 50° 光束角配置

ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

P7 SERIES



Integrated metal anti-glare cup
一体金属防眩杯



Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
P7-35圆形无边框	5W	COB	≥95	80lm/W	3000K 5000K 3500K 6000K 4000K
P7-45圆形无边框	7W				
P7-55圆形无边框	9W				

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installation 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ●

Operating Temp 工作温度
-25°C ~ 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm

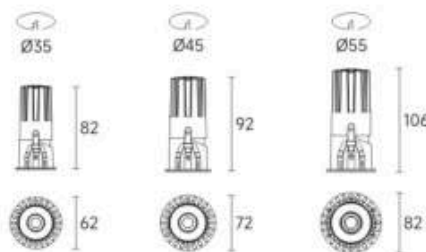

Photometric 光学角度

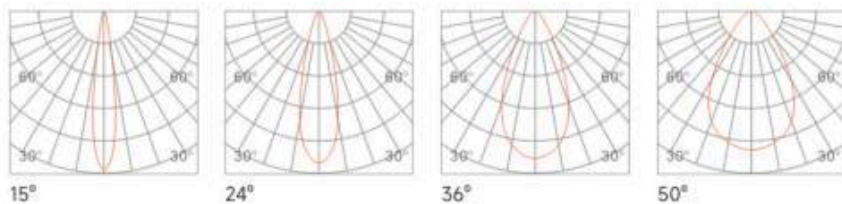

※ The 35mm cutout version does not support a 50° beam angle configuration.
35mm开孔款式，不支持 50° 光束角配置

ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

P7 SERIES



Integrated metal anti-glare cup
一体金属防眩杯



Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
P7-35弧面嵌入式	7W	COB	≥95	80lm/W	3000K 5000K 3500K 6000K 4000K
P7-45弧面嵌入式	9W				
P7-55弧面嵌入式	12W				

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installation 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ●

Operating Temp 工作温度
-25°C ~ 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm

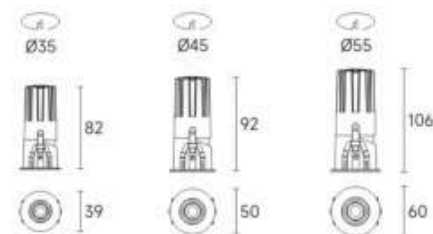

Photometric 光学角度

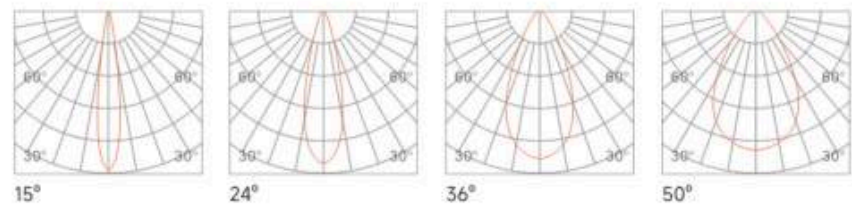

※ The 35mm cutout version does not support a 50° beam angle configuration.
35mm开孔款式，不支持 50° 光束角配置

ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

P7 SERIES



Metal secondary cup
金属二次杯



哑黑
white+black

哑白
white

Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
P7-35圆形嵌入式	7W	COB	≥95	80lm/W	3000K 5000K 3500K 6000K 4000K
P7-45圆形嵌入式	9W				
P7-55圆形嵌入式	12W				

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installation 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ●

Operating Temp 工作温度
-25°C ~ 50°C


UGR 眩光值
≤9



Dimension 尺寸
unit:mm

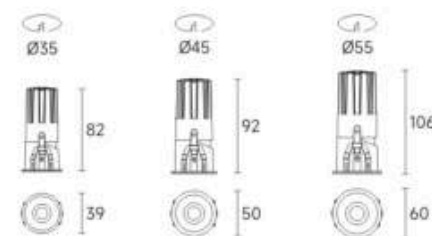

Photometric 光学角度

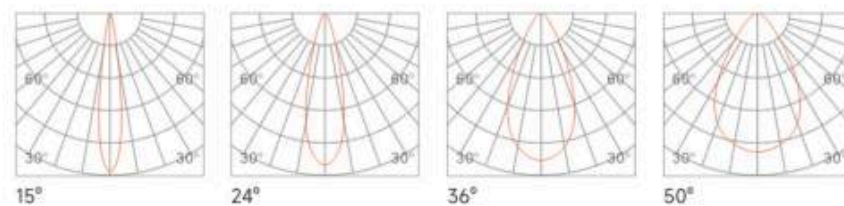


※ The 35mm cutout version does not support a 50° beam angle configuration.
35mm开孔款式, 不支持 50° 光束角配置

ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

无主灯
全球高端定制服务商
OEM/ODM
以匠心 致好光

LIGHTING PRODUCTS
WORLDWIDE PREMIUM
CUSTOM SERVICE

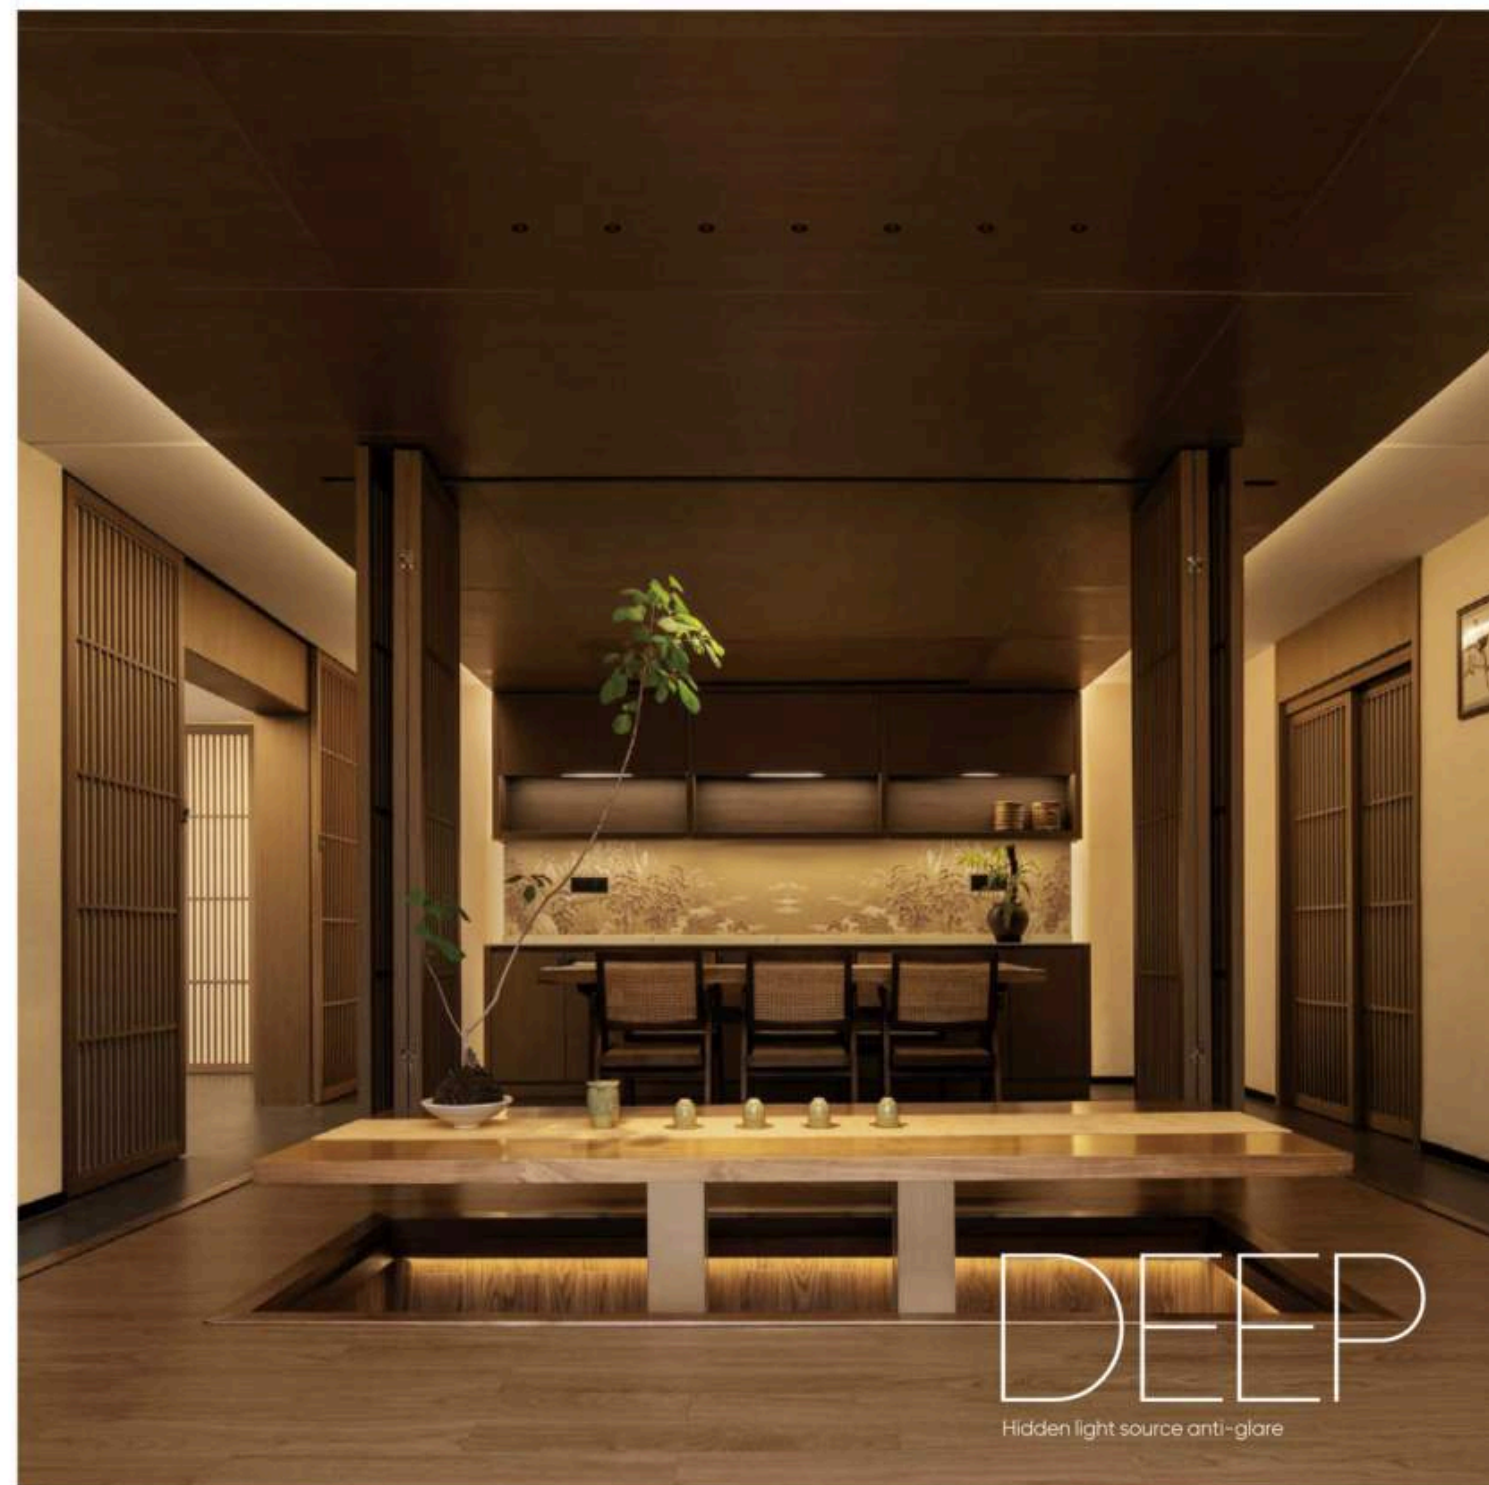

HIGH-EFFICIENCY DOWNLIGHT

P5

SERIES

薄灯体，大透镜，高光效，大功率



P5系列极致工艺美学金属质感，纤薄灯体迸发强劲光效，颜值与实力兼具，完美解决低矮吊顶安装难题。
搭载大尺寸光学透镜，透光均匀、光效出众，支持大功率配置，狭小层高也能实现充沛照明。

P5 series boasts exquisite craftsmanship and metallic texture.
The ultra-slim body delivers powerful lighting performance, blending elegant looks and reliable quality,
ideal for low ceiling installation.
Equipped with large optical lens, it provides even and superior light output. Supporting high-power configuration,
it ensures sufficient brightness even in limited ceiling height spaces.



ULTRA SLIM METAL BODY

P5 SERIES



全金属灯体，散热性能出众
Full-metal lamp body with excellent heat dissipation

SIMPLE STYLE

P5 SERIES



Ø75 15W

ULTRA
52mm

薄体大功率，适配低矮吊顶
Slim body with high power, Ideal for low ceilings

P5 SERIES



一体金属杯身，简约更显高级

One piece metal cup body, simple yet sophisticated



多种金属面环选择

Multiple metal face rings options

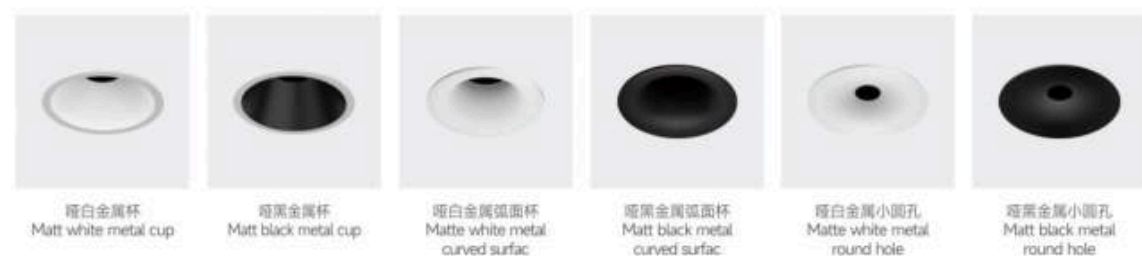

Ø75 15W

ULTRA
55mm

**HIGH-EFFICIENCY
DOWNLIGHT**

大尺寸透镜成就更高光效

LARGE LENS

P5 SERIES



Integrated metal anti-glare cup
一体金属防眩杯



Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
P5-55圆形嵌入式	10W	COB	≥95	80lm/W	● 3000K ○ 5000K
P5-65圆形嵌入式	12W				● 3500K ● 6000K
P5-75圆形嵌入式	15W				● 4000K

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installation 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤13



Dimension 尺寸
unit:mm

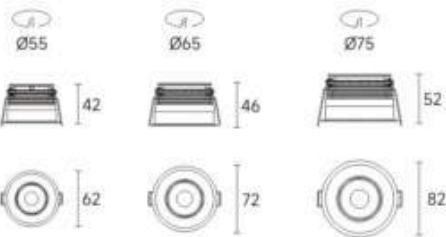

Photometric 光学角度

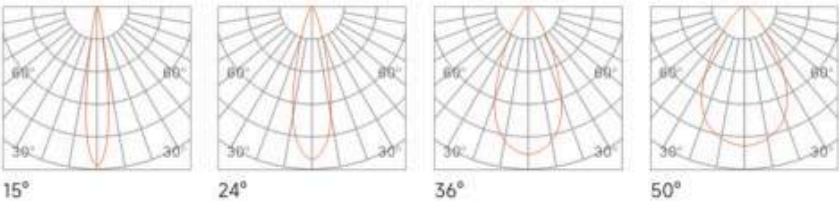

ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

P5 SERIES



Integrated metal anti-glare cup
一体金属防眩杯



Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
P5-35弧面嵌入式	3W	COB	≥95	80lm/W	● 3000K ○ 5000K
P5-55弧面嵌入式	10W				● 3500K ● 6000K
P5-65弧面嵌入式	12W				● 4000K
P5-75弧面嵌入式	15W				

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installation 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤13



Dimension 尺寸
unit:mm

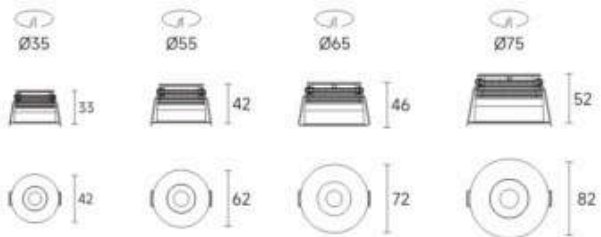

Photometric 光学角度

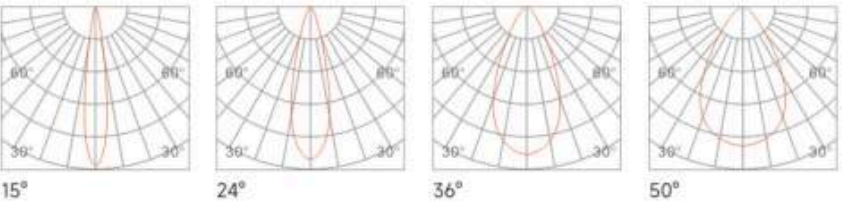

ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

P5 SERIES



Integrated metal anti-glare cup
一体金属防眩杯



哑白
matte white



哑黑
matte black

Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
P5-55小圆孔嵌入式	7W	COB	≥95	80lm/W	3000K 5000K 3500K 6000K 4000K
P5-75小圆孔嵌入式	12W				

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installation 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP20


Reflector Colours 防眩杯
● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤13



Dimension 尺寸
unit:mm



Photometric 光学角度

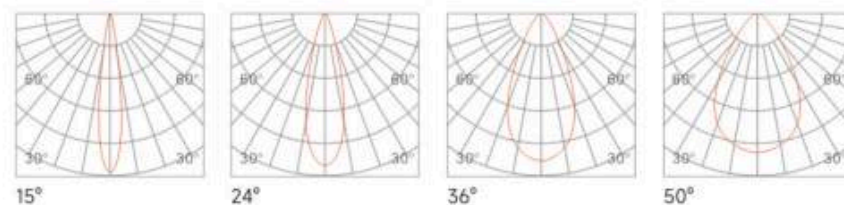

ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

无主灯
全球高端定制服务商
OEM/ODM
以匠心 致好光

LIGHTING PRODUCTS
WORLDWIDE PREMIUM
CUSTOM SERVICE



XUGUANG

SERIES

旭光系列

**HIGH-EFFICIENCY
DOWNLIGHT**
高光效筒灯

XUGUANG SERIES
旭光系列

光源深藏设计，有效防止眩光。出光搭配专业光学设计的透镜、防眩杯，灯体出光均匀柔和，既能达到的高光效标准，同时增加光感舒适度，减少眼部受到眩光刺激。

The light source is concealed to effectively prevent glare.
Equipped with professionally designed lenses and anti-glare cups, the light output from the lamp body is uniform and soft, meeting high luminous efficiency standards while enhancing visual comfort and reducing glare irritation to the eyes.



IP44

IP44 防护等级

满足浴室、厨房、雨棚等不同场景需求

IP44 protection grade

Meet the needs of different scenes such as bathroom, kitchen and canopy.




XUGUANG SERIES
旭光系列

HIGH-EFFICIENCY DEEP ANTI-GLARE

高光效 深防眩

射灯款 (COB Spotlight)

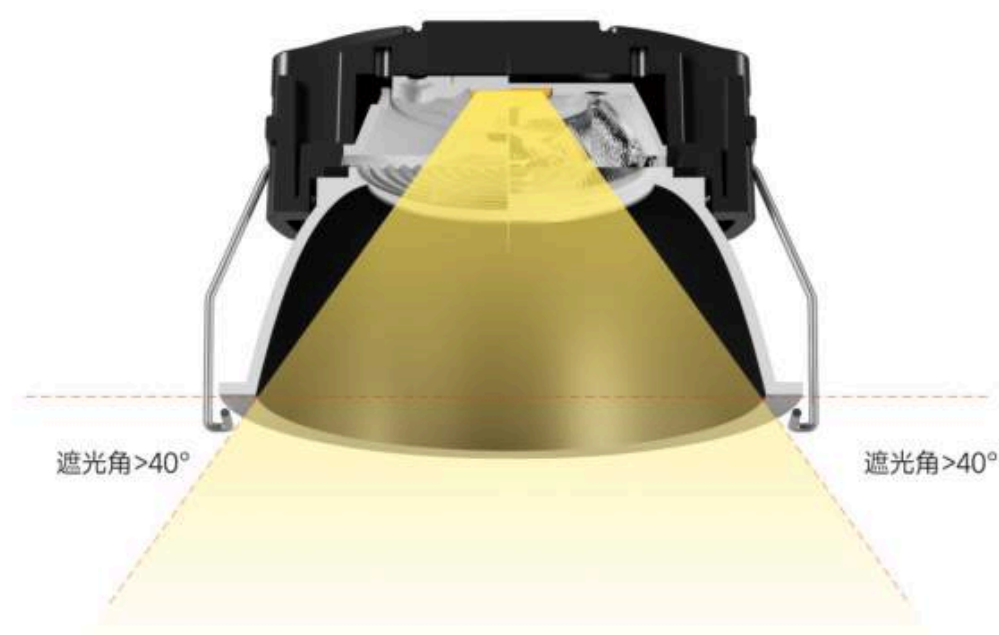

Two types of optical lenses optional
可选两种光学透镜



射灯款 (COB Spotlight)



筒灯款 (SMD Downlight)

HIGH-EFFICIENCY DOWNLIGHT 高光效筒灯

XUGUANG SERIES
旭光系列

XUGUANG SERIES 旭光系列



全铝面环
一体金属杯身，简约更显高级

Full aluminum face ring
One piece metal cup body, simple yet sophisticated

Ø75 / 12W
Ø95 / 20W
Ø125 / 30W




旭光-圆形嵌入式射灯



75×75 / 12W
95×95 / 20W
125×125 / 30W



旭光-方形嵌入式射灯




150×75 / 2×10W
230×75 / 3×10W



旭光-双头方形嵌入式



旭光-三头方形嵌入式



多种金属面环选择
Multiple metal face rings options



砂白金属一体杯
Sand white metal cup



砂黑金属一体杯
Sand black+white metal cup



全黑金属一体杯
Black metal cup




砂白金属一体杯
Sand white metal cup



全黑金属一体杯
Black metal cup

XUGUANG SERIES 旭光系列



Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
旭光-75圆形嵌入式	12W	COB/SMD	≥95	80lm/W	● 3000K ○ 5000K
旭光-95圆形嵌入式	20W				● 3500K ○ 6000K
旭光-125圆形嵌入式	30W				● 4000K

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installation 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP44


Reflector Colours 防眩杯
● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤13



Dimension 尺寸
unit:mm

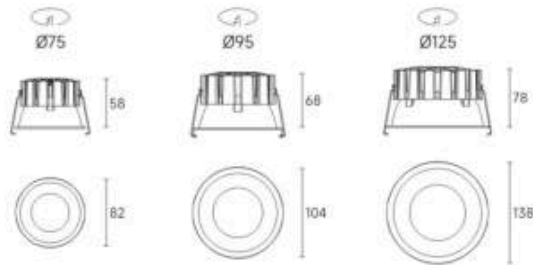

Photometric 光学角度

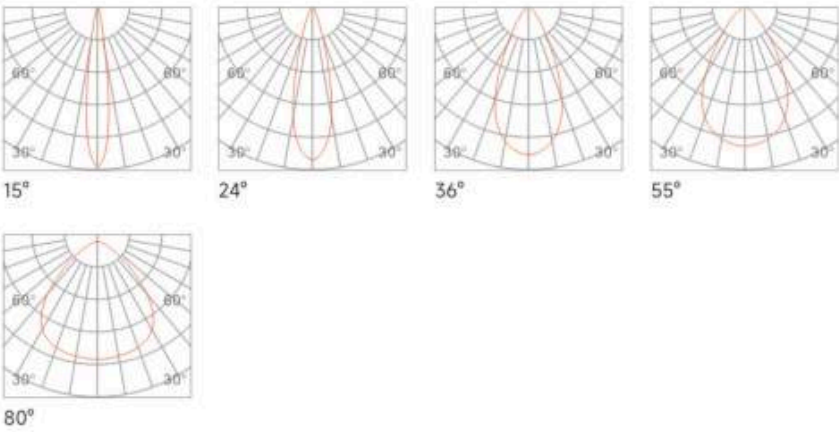

ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

XUGUANG SERIES 旭光系列



Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
旭光-75方形嵌入式	12W	COB/SMD	≥95	80lm/W	● 3000K ○ 5000K
					● 3500K ○ 6000K
					● 4000K

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installation 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP44


Reflector Colours 防眩杯
● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤13



Dimension 尺寸
unit:mm



Photometric 光学角度

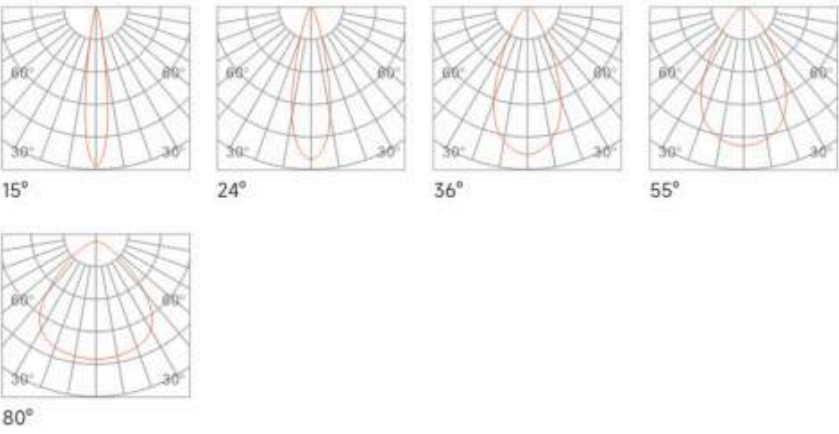

ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

XUGUANG SERIES 旭光系列



砂白金属一体杯
Sand white metal cup



砂黑金属一体杯
Sand black+white metal cup

Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
旭光-75双头方形嵌入式	20W	COB/SMD	≥95	80lm/W	● 3000K ○ 5000K ● 3500K ○ 6000K ● 4000K

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installation 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP44


Reflector Colours 防眩杯
● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤13



Dimension 尺寸
unit:mm



Photometric 光学角度

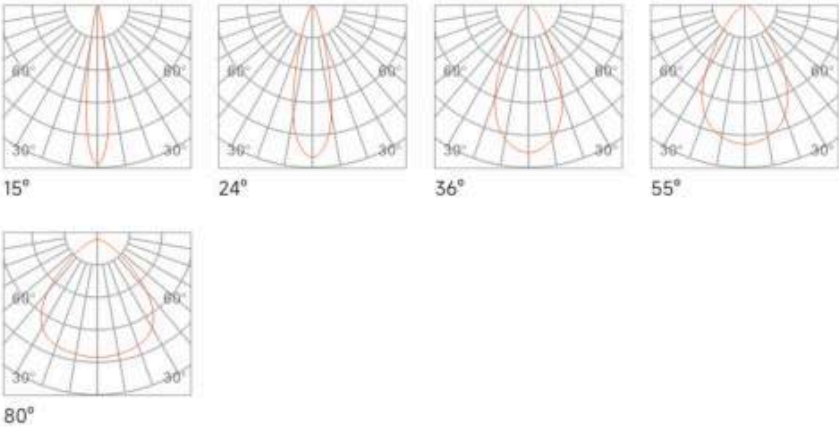

ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

XUGUANG SERIES 旭光系列



砂白金属一体杯
Sand white metal cup



砂黑金属一体杯
Sand black+white metal cup

Model 型号	Power 功率	Chip Type 光源	CRI 显指	Light Efficiency 光通量	Color Temperature 色温
旭光-75三头方形嵌入式	30W	COB/SMD	≥95	80lm/W	● 3000K ○ 5000K ● 3500K ○ 6000K ● 4000K

Input Voltage 电压
AC220V-240V 50/60Hz

Materials 灯体材质
Aluminum

Installation 安装
Recessed
□ 嵌入式

Protection Grade 防护等级
IP44


Reflector Colours 防眩杯
● ●

Operating Temp 工作温度
-25°C - 50°C


UGR 眩光值
≤13



Dimension 尺寸
unit:mm



Photometric 光学角度

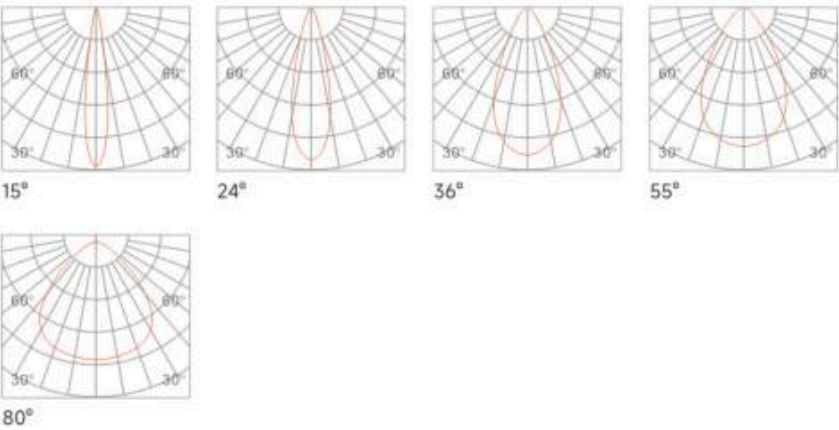

ORTIONS

1	NL DIM
2	DIM 0-10V
3	DIM DALI
4	TRIAC
5	ZIGBEE

XUGUANG SERIES
旭光系列

XUGUANG SERIES

RECESSED DOWNLIGHT

